




PROJECT

TYPE

NOTES

QUANTITY

DATE

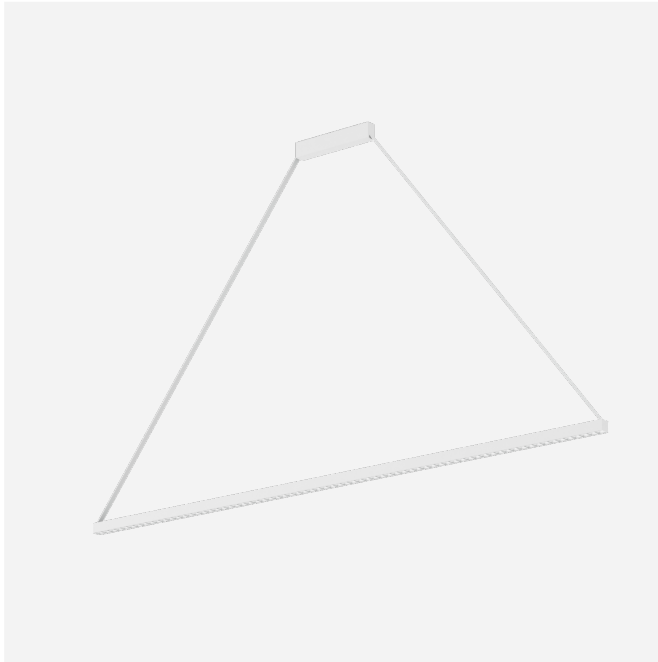

Suspended luminaire made from aluminium; inclusive cable suspension max. 2500 mm; surface White Matt; powder coated; matt texture; No matching RAL; PCB 3-step binning; phase-cut dim; light colour 3000 K; CRI ≥ 90 ; 220 - 240 V; beam angle 67°; degree of protection IP20; Class 1; inclusive 2 ceiling brackets; driver included;

LUMINAIRE

Ceiling
Suspended
White Matt
No matching RAL
IP20
Interior
2700 lm

LED Module

3000 K
CRI ≥ 90
 ≤ 3 SDCM (initial MacAdam)

Optical

Wide
beam angle 67°

Electrical

phase-cut dim
220 - 240 V
system 27.0 W
Class I
Standard

Physical

length 1504 mm
width 25 mm
height 25 mm
0.96 kg
cable length max. 2500 mm

