




PROJECT

TYPE

NOTES

QUANTITY

DATE

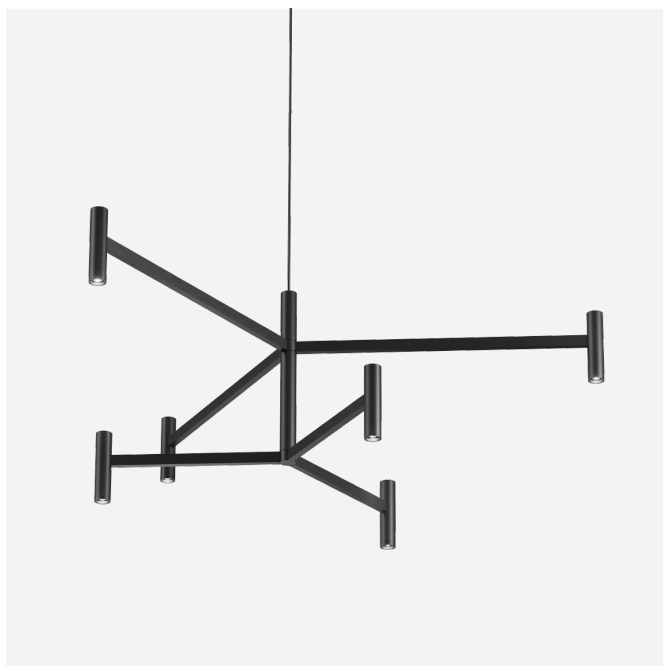

Ceiling suspended luminaire made from aluminium; inclusive adjustable cable suspension max. 2500mm; surface Black Matt; powder coated, matt texture; No matching RAL; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; ≤ 2 SDCM (initial MacAdam); CRI ≥ 90 ; beam angle 30°; 220 - 240 V; degree of protection IP20; Class 2; driver included;

LUMINAIRE

Ceiling
Suspended
Black Matt
No matching RAL
IP20
Interior
1440 lm

LED Module

2700 K
CRI ≥ 90
L80 / 50000h
 ≤ 2 SDCM (initial MacAdam)
 ≤ 2 SDCM (initial MacAdam)

Optical

Medium
beam angle 30°

Electrical

phase-cut dim
220 - 240 V
system 18.0 W
Class II
Standard

Physical

diameter 1000 mm
height 354 mm
1.6 kg
cable length max. 2500 mm

