


WOHLERT PENDANT

Wohlert Pendant - 5741086993

The fixture provides uniform, general and diffused illumination. The opening at the bottom of the glass produces downwards directed light. The quality of the glass ensures that the fixture is evenly lit.



Vilhelm Wohlert

Vilhelm Wohlert (1920-2007) graduated as an architect from The Royal Danish Academy of Fine Arts in Copenhagen in 1944. During his career, he held the position of professor at The Royal Danish Academy of Fine Arts in Copenhagen from 1968 until 1986, was an Honorary Member of the same institution, where he was also Deputy CEO in the period 1968-71.



Product info

Mounting

Suspension type E27: Cable 3x0,75mm². Canopy: Yes. Cable length: 3m. Suspension type LED: Cable 2x1,5mm². Canopy: Yes. LED canopy contains driver. Cable length: 4m.

Finish

Matt white opal glass.

Materials

Shade: Mouth-blown matt white opal glass. Pendant tube: Brushed steel.

Sizes and weights


width x Height x Length (mm) | 350 x 370 x 350 Max 4.8 kg | 300 x 320 x 300 Max 2.5 kg | 400 x 420 x 400 Max 4.8 kg

Class

Ingress protection IP20. Electric shock protection I w. ground.


Light source

1x70W E27

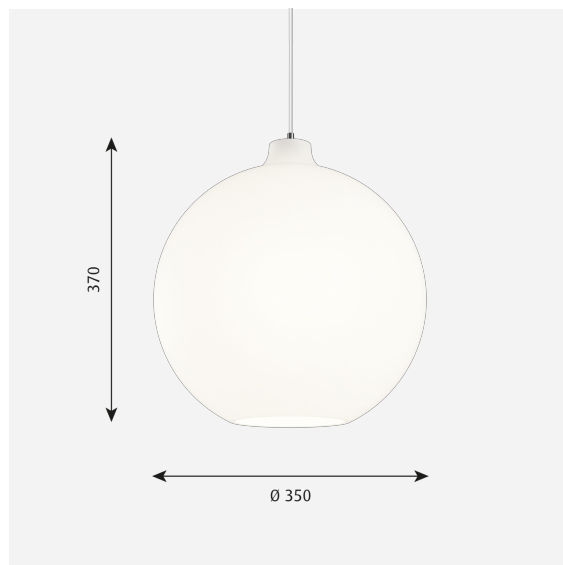


Light distribution diagrams


Cartesian

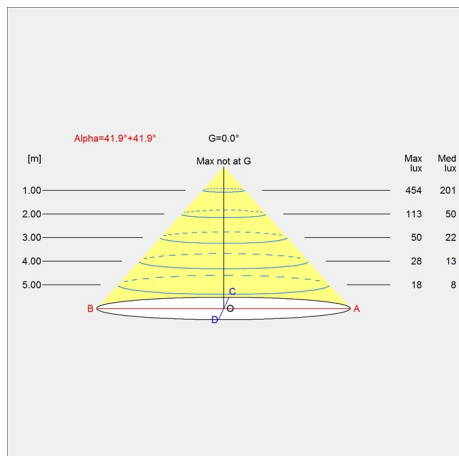

Isolux

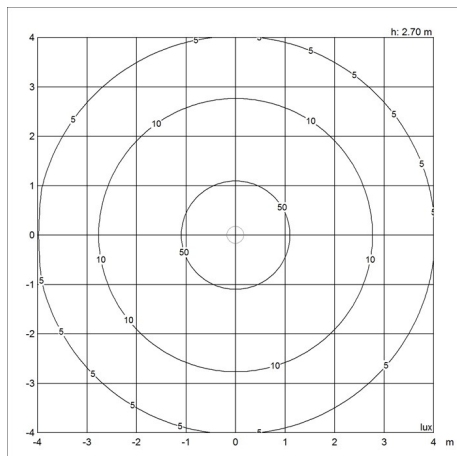

Polar

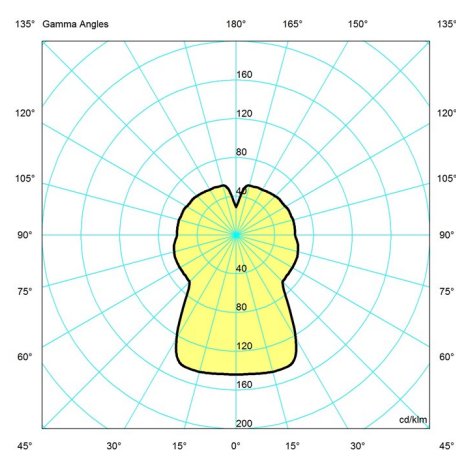

Spare parts & accessories

Product

Canopy White 2-part tophat ©
Wohlerl Ø300 glass
Wohlerl Ø350 glass
Wohlerl Ø400 glass

Variant number

5749329034
5741480382
5741480395
5741480405

Data specifications

Colour	White opal glass	Length	350
Width	350	Height	370
Built-in Height	-	IP class	20
Class	I	Net Weight	3.0
Standby (W)	-	Power Factor (P = 100 % / P = 50 %)	-
Inrush Current	-	Light source	1x70W E27
Kelvin	-	CRI	-

Wohlert Pendant

SDCM	-
Watt	200
Light control	-
UGR Transversal / Axial	12.1/12.1
Driver life	-

Lumen	2724
Efficacy	14
Min. Dim Level (%)	-
L80B50 (hours)	-