


Trend U&D 60 Blade


LL1291123

Lombardo.



Technical information:

Installation:	Wall, Surface mounting wall
Material:	Aluminium
Finish:	White RAL 9010
Treatment:	Sea Treatment
Diffuser type:	Serigraphed glass
Lamp type:	LED
Energy performance class:	E
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	6
Lumen:	1000
Real Lumen:	270-280
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	45-56-66-82
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	IP 66
Resistance to breakage:	IK 07 2J xx5
Standards and Marks of Conformity:	CE UK EA

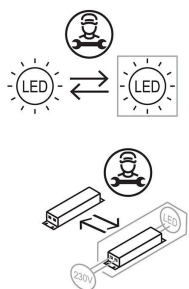

Trend U&D 60 Blade

LL1291123

Lombardo.




Trend U&D 60 Blade

Lombardo.

LL1291123

Lighting simulation:

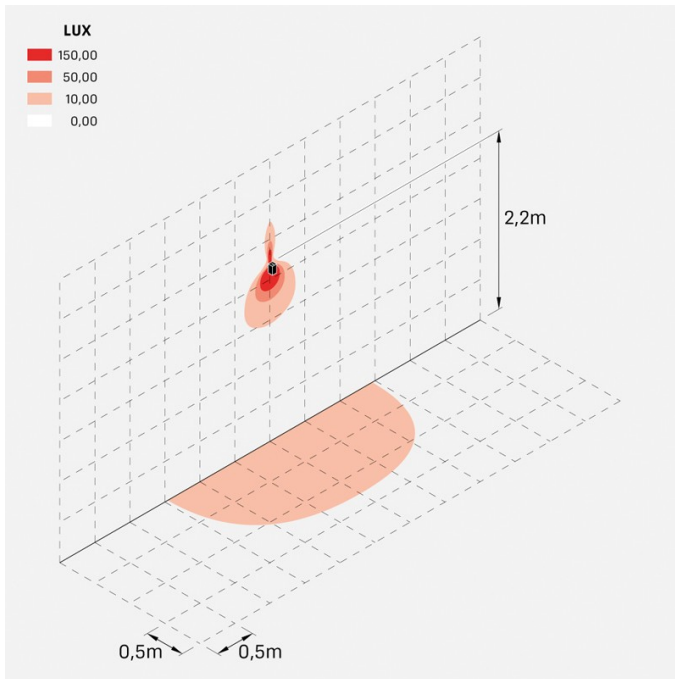

trend_60_ued_blade

Photometric curves:

