


# Trend U&D 60 Blade


LL129112N

**Lombardo.**



## Technical information:

Installation:	Wall, Surface mounting wall
Material:	Aluminium
Finish:	White RAL 9010
Treatment:	Sea Treatment
Diffuser type:	Serigraphed glass
Lamp type:	LED
Energy performance class:	E
Colour temperature:	4000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	6
Lumen:	1000
Real Lumen:	270-280
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	45-56-66-82
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	<b>IP 66</b>
Resistance to breakage:	<b>IK 07 2J xx5</b>
Standards and Marks of Conformity:	CE UK EA

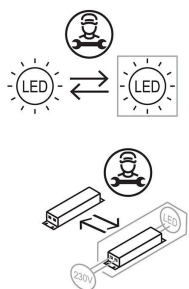

# Trend U&D 60 Blade

LL129112N

Lombardo.




# Trend U&D 60 Blade

Lombardo.

LL129112N

## Lighting simulation:

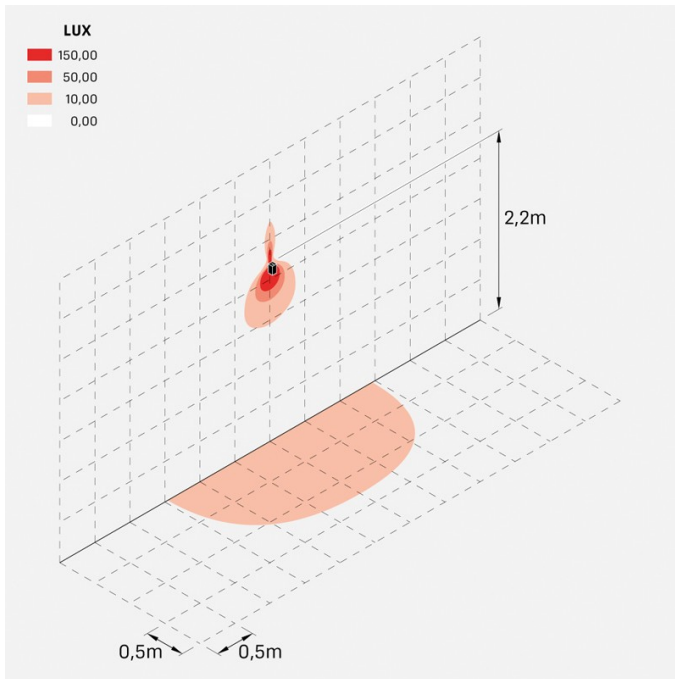

trend\_60\_ued\_blade

## Photometric curves:

