

# Noa 100 Wall

LL133036L3

**Lombardo.**



## Technical information:

|                                    |                         |
|------------------------------------|-------------------------|
| Installation:                      | Wall, Ceiling, Ground   |
| Material:                          | Aluminium               |
| Finish:                            | Grey High Tech RAL 9006 |
| Treatment:                         | Sea Treatment           |
| Diffuser type:                     | Serigraphed glass       |
| Optics:                            | 60°                     |
| Lamp type:                         | LED                     |
| Energy performance class:          | F                       |
| Colour temperature:                | 3000K                   |
| CRI:                               | >80                     |
| LB Factor:                         | L80B20 - 50.000h        |
| Photobiological risk:              | RG0                     |
| Power consumption (Watt):          | 16                      |
| Lumen:                             | 1750                    |
| Real Lumen:                        | 800                     |
| Power supply:                      | ✓ integrated            |
| LED:                               | AC DIRECT               |
| Version with:                      | ⊞ HONEYCOMB             |
| Insulation class:                  | ⊕ CL.I                  |
| Type of protection:                | <b>IP 66</b>            |
| Resistance to breakage:            | <b>IK 07 2J xx5</b>     |
| Standards and Marks of Conformity: | CE UK CA                |
| Dimming                            | Phase cut               |

Optic D not available for Honeycomb version.



# Noa 100 Wall

LL133036L3

**Lombardo.**



## Installation images:




# Noa 100 Wall

LL133036L3

Lombardo.

## Lighting simulation:

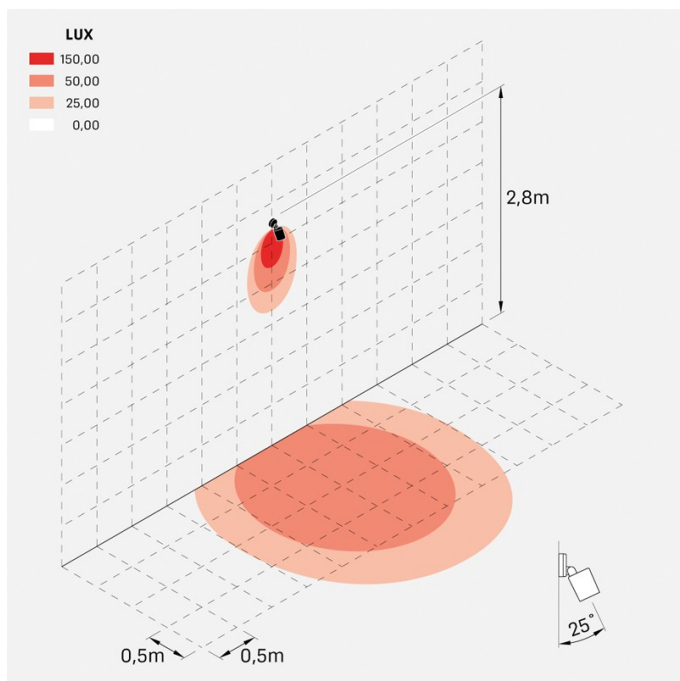

noa\_100\_wall\_honey\_optic\_l

## Photometric curves:

