

# Noa 100 Wall

LL133039LN

**Lombardo.**



## Technical information:

|                                    |                                                                                                                                                                             |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Installation:                      | Wall, Ceiling, Ground                                                                                                                                                       |
| Material:                          | Aluminium                                                                                                                                                                   |
| Finish:                            | Green RAL 6003                                                                                                                                                              |
| Treatment:                         | Sea Treatment                                                                                                                                                               |
| Diffuser type:                     | Serigraphed glass                                                                                                                                                           |
| Optics:                            | 60°                                                                                                                                                                         |
| Lamp type:                         | LED                                                                                                                                                                         |
| Energy performance class:          | F                                                                                                                                                                           |
| Colour temperature:                | 4000K                                                                                                                                                                       |
| CRI:                               | >80                                                                                                                                                                         |
| LB Factor:                         | L80B20 - 50.000h                                                                                                                                                            |
| Photobiological risk:              | RG0                                                                                                                                                                         |
| Power consumption (Watt):          | 16                                                                                                                                                                          |
| Lumen:                             | 1750                                                                                                                                                                        |
| Real Lumen:                        | 800                                                                                                                                                                         |
| Power supply:                      | ✓ integrated                                                                                                                                                                |
| LED:                               | AC DIRECT                                                                                                                                                                   |
| Version with:                      |  HONEYCOMB                                                                             |
| Insulation class:                  |  CL.I                                                                                  |
| Type of protection:                | <b>IP 66</b>                                                                                                                                                                |
| Resistance to breakage:            | <b>IK 07 2J xx5</b>                                                                                                                                                         |
| Standards and Marks of Conformity: |   |
| Dimming                            | Phase cut                                                                                                                                                                   |

Optic D not available for Honeycomb version.



# Noa 100 Wall

LL133039LN

**Lombardo.**



## Installation images:



**Lombardo S.r.l.**

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E [info@lombardo.it](mailto:info@lombardo.it)


**lombardo.it**

# Noa 100 Wall

LL133039LN

**Lombardo.**

## Lighting simulation:

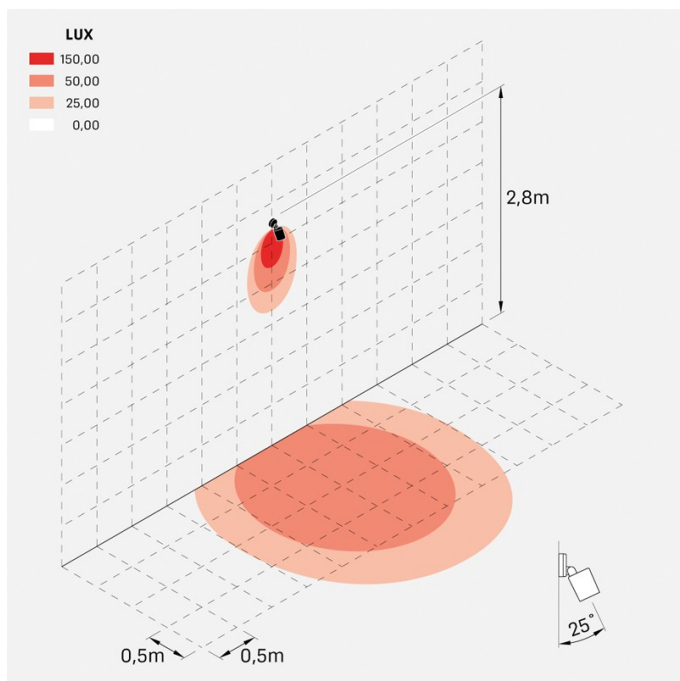

noa\_100\_wall\_honey\_optic\_l

## Photometric curves:

