

Flo T 500

LL134020N

Lombardo.

Technical information:

Installation:	Wall, Ceiling
Material:	Aluminium
Finish:	White RAL 9003
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	4000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	45
Lumen:	4200
Real Lumen:	3517
Power supply:	✓ integrated
LED:	220-240 V
Circuit breaker	13-16-19-24
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	IP 20
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK CA



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it

Flo T 500

LL134020N

Lombardo.



Installation images:



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Flo T 500

LL134020N


Lombardo.

Lighting simulation:

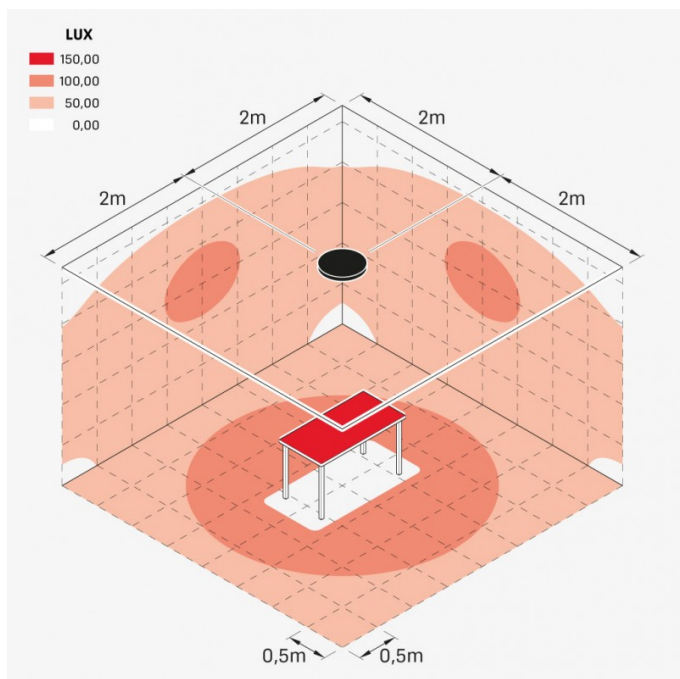

flo_t_500

Photometric curves:

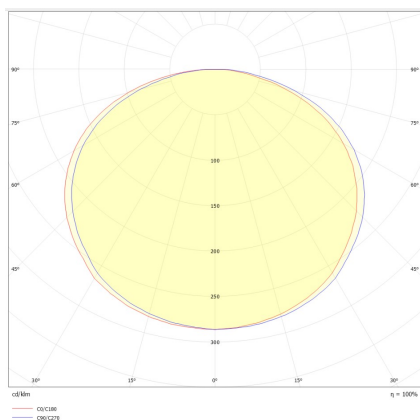

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it