

Tape 220

LL14523S1

Lombardo.



Technical information:

Installation:	Wall
Material:	Aluminium
Finish:	Sand RAL 1013
Treatment:	Sea Treatment
Diffuser type:	Frosted glass
Lamp type:	LED
Energy performance class:	E
Colour temperature:	2200K
CRI:	>90
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	6
Lumen:	870
Real Lumen:	800
Power supply:	✓ included remotely
LED:	24V REMOTE
Version with:	 Kit DRIVER IP67 + BOX
Insulation class:	 CL.III
Type of protection:	IP 66
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	 

Codes LL14513: Kit consisting of Tape 220 + LB1070069 (driver IP66), it can be housed in standard 506 recess box
Codes LL14523: Kit consisting of Tape 220 + recess box 506 LB11680 + LB1070069 (driver IP66)



Tape 220

LL14523S1

Lombardo.



Installation images:



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Tape 220

LL14523S1


Lombardo.

Lighting simulation:

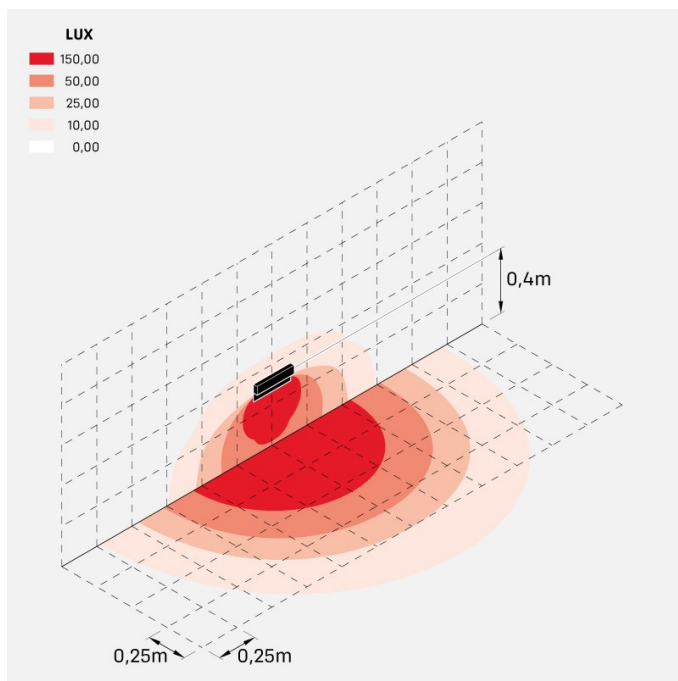

tape_220

Photometric curves:

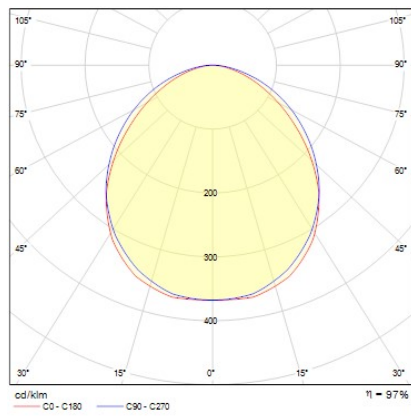

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it