


# Tape 220

LL14523ZN

**Lombardo.**



## Technical information:

|                                    |                                                                                                                                                                             |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Installation:                      | Wall                                                                                                                                                                        |
| Material:                          | Aluminium                                                                                                                                                                   |
| Finish:                            | Gold                                                                                                                                                                        |
| Treatment:                         | Sea Treatment                                                                                                                                                               |
| Diffuser type:                     | Frosted glass                                                                                                                                                               |
| Lamp type:                         | LED                                                                                                                                                                         |
| Energy performance class:          | E                                                                                                                                                                           |
| Colour temperature:                | 4000K                                                                                                                                                                       |
| CRI:                               | >90                                                                                                                                                                         |
| LB Factor:                         | L80B20 - 50.000h                                                                                                                                                            |
| Photobiological risk:              | RG0                                                                                                                                                                         |
| Power consumption (Watt):          | 6                                                                                                                                                                           |
| Lumen:                             | 870                                                                                                                                                                         |
| Real Lumen:                        | 800                                                                                                                                                                         |
| Power supply:                      | ✓ included remotely                                                                                                                                                         |
| LED:                               | 24V REMOTE                                                                                                                                                                  |
| Version with:                      |  Kit<br>DRIVER IP67 + BOX                                                              |
| Insulation class:                  |  CL.III                                                                                |
| Type of protection:                | <b>IP 66</b>                                                                                                                                                                |
| Resistance to breakage:            | <b>IK 06 1J xx3</b>                                                                                                                                                         |
| Standards and Marks of Conformity: |   |


Codes LL14513: Kit consisting of Tape 220 + LB1070069 (driver IP66), it can be housed in standard 506 recess box  
Codes LL14523: Kit consisting of Tape 220 + recess box 506 LB11680 + LB1070069 (driver IP66)





# Tape 220

LL14523ZN


**Lombardo.**

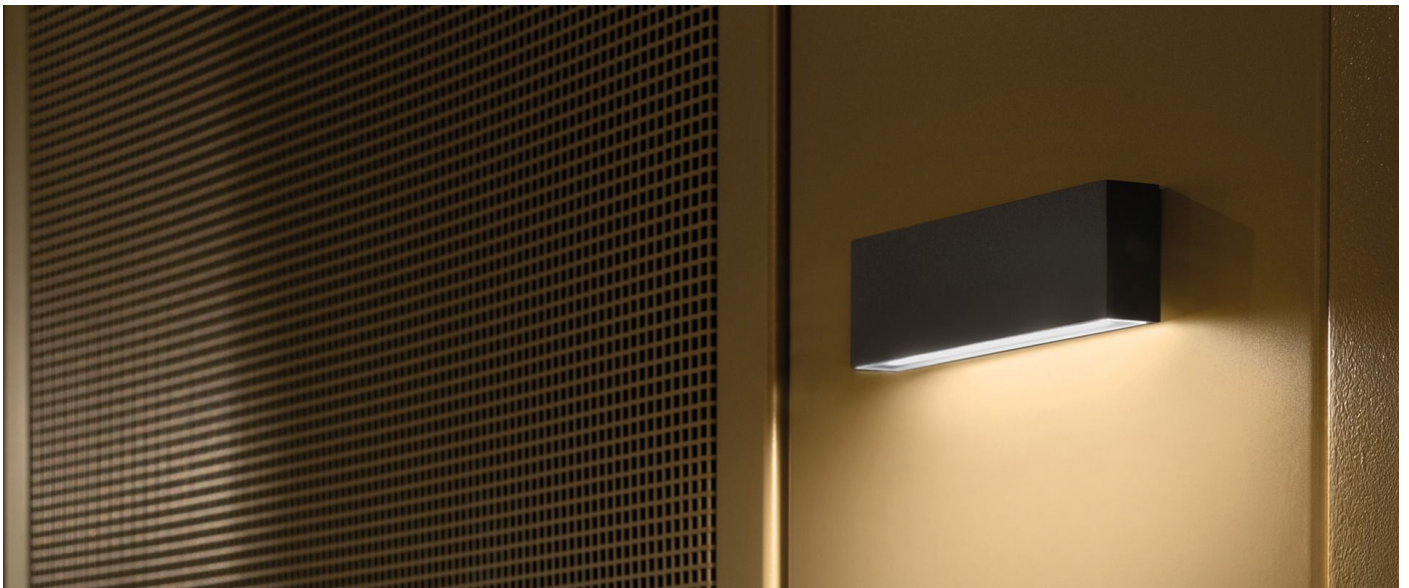

## Installation images:



### Lighting simulation:

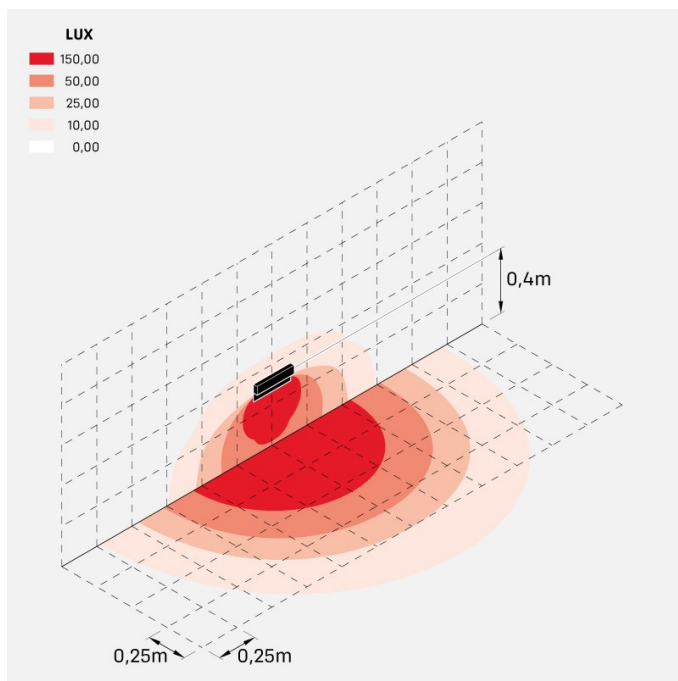

tape\_220

### Photometric curves:

