



### Technical information:

|                                    |                     |
|------------------------------------|---------------------|
| Installation:                      | Wall                |
| Material:                          | Polycarbonate       |
| Finish:                            | Light Grey RAL 7044 |
| Diffuser type:                     | Polycarbonate       |
| Lamp type:                         | LED                 |
| Energy performance class:          | F                   |
| Colour temperature:                | 4000K               |
| CRI:                               | >80                 |
| LB Factor:                         | L80B50 - 50.000h    |
| Photobiological risk:              | RG0                 |
| Power consumption (Watt):          | 5                   |
| Lumen:                             | 600                 |
| Real Lumen:                        | 362                 |
| Power supply:                      | ✓ integrated        |
| LED:                               | AC DIRECT           |
| Insulation class:                  | ⊕ CL.I              |
| Type of protection:                | <b>IP 65</b>        |
| Resistance to breakage:            | <b>IK 06 1J xx3</b> |
| Standards and Marks of Conformity: | CE UK               |
| Dimming                            | Phase cut           |

GU10 version: light bulb not included.

**Clic Wall**

LL14802LN


**Lombardo.**



**Installation images:**



### Lighting simulation:

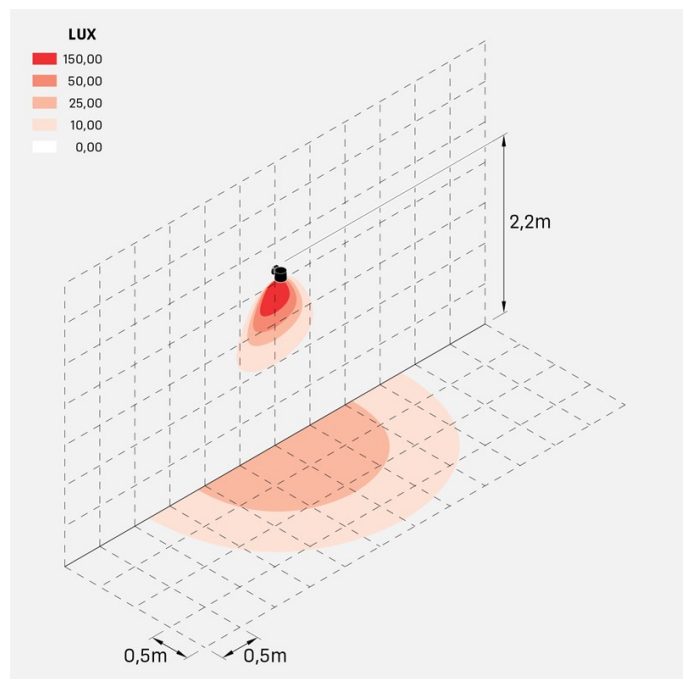

clic\_wall

### Photometric curves:

