


Clic Up Wall

LL14812B2

Lombardo.



Technical information:

Installation:	Wall
Material:	Polycarbonate
Finish:	Black RAL 9005
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B50 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	5
Lumen:	600
Real Lumen:	330
Power supply:	☑ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Type of protection:	IP 65
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK ENEC
Dimming	Phase cut

GU10 version: light bulb not included.

Clic Up Wall

LL14812B2

Lombardo.




Installation images:



LL14812B2

Lighting simulation:

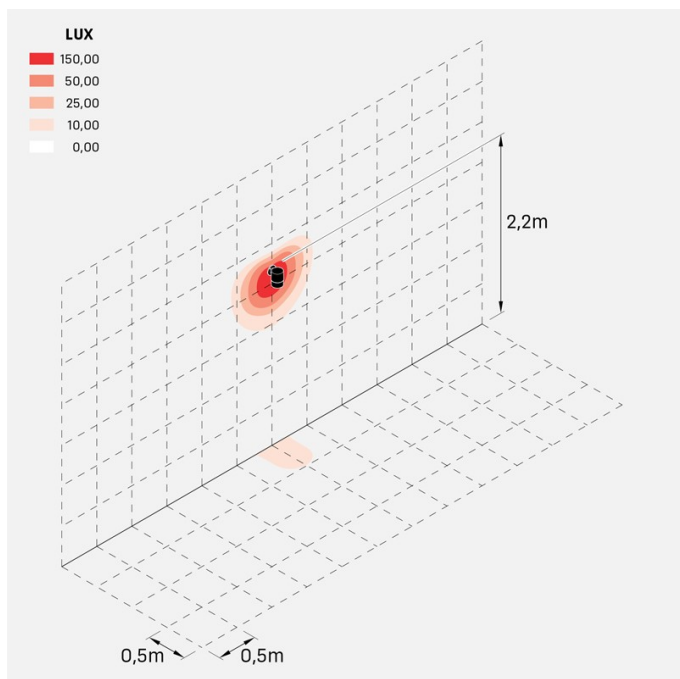

clic_up_wall

Photometric curves:

