


Technical information:

Installation:	Ground, Wall
Material:	Aluminium
Finish:	Black Anodized Aluminium
Treatment:	Anodization
Diffuser type:	Transparent glass
Optics:	30°
Lamp type:	LED
Energy performance class:	G
Colour temperature:	2700K
CRI:	>80
LB Factor:	L70B10 - 50.000h
Step MacAdam:	3
Power consumption (Watt):	20
Lumen:	2.550
Real Lumen:	2030
Power supply:	✓ integrated
LED:	220-240 V
Insulation class:	⊕ CL.I
Power cable:	0.8 m H07RN-F 3x1
Type of protection:	IP 66
Resistance to breakage:	IK 08 5J xx7
Standards and Marks of Conformity:	CE UK
Operating temperature:	-30°C / +50°C


Cable on-off version: 0,8m H07RN-F 3X1. Cable DALI version: 0,8m H07RN-F 5x1,5.



Pad

LL157000M2

Lombardo.

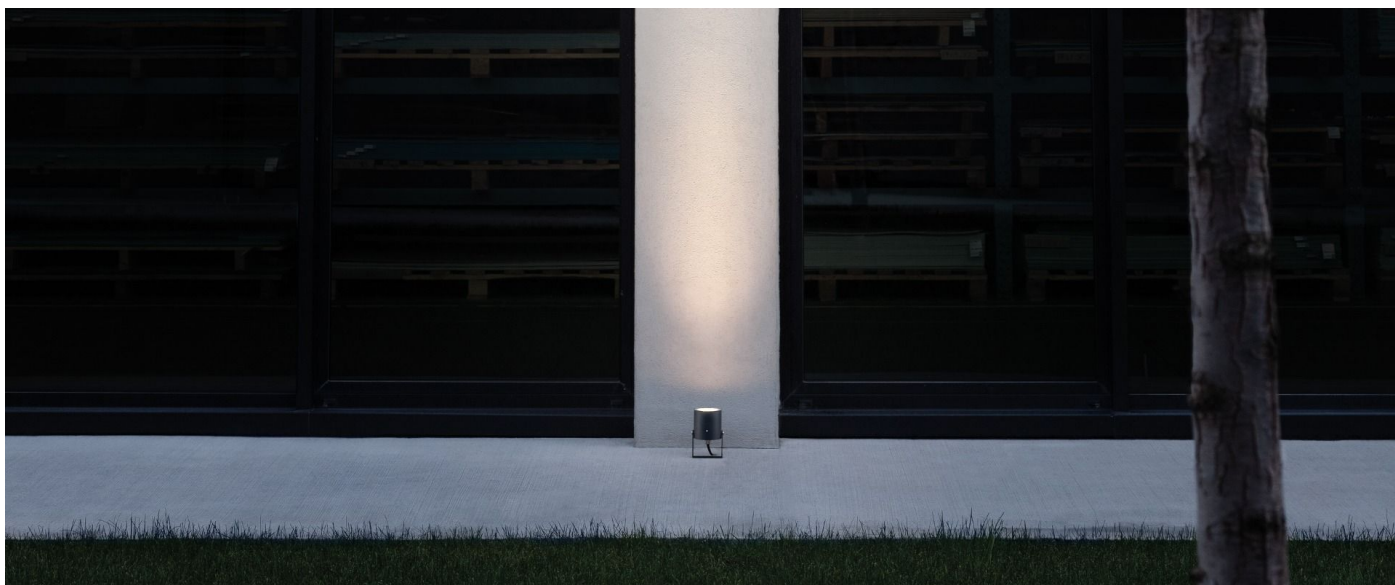

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it

Lighting simulation:



Pad_10



Pad_15



Pad_30

Photometric curves:

