

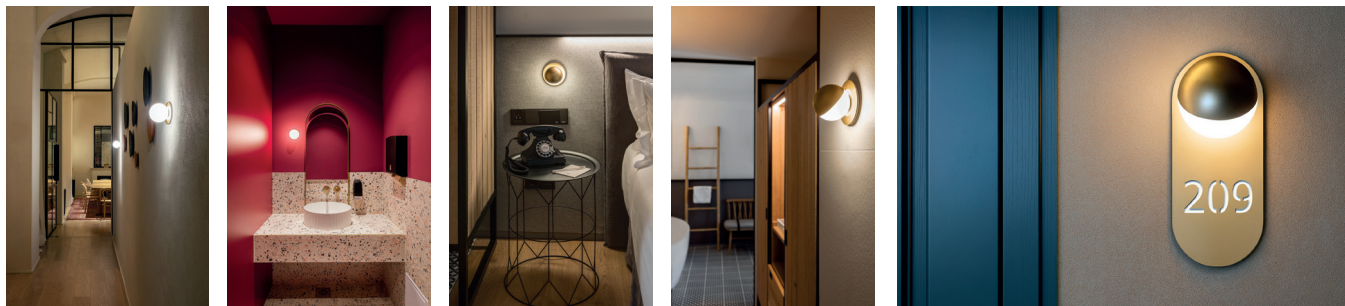


Table of contents

1. Product overview	Page 2
2. Finishes and materials	Page 2
3. Light Source & dimming	Page 2
4. Functionality	Page 3
5. Photometric data and technical information	Page 3
6. Installation	Page 3
7. Ordering codes	Page 4
8. Certifications & standards	Page 8
9. Maintenance & Cleaning	Page 8

Versions




ALF_3740
Plain glass shade
Page 4



ALF_3740A
Glass diffuser with full front cap
Page 5



ALF_3740A1
Glass diffuser with 45° angled cap
Page 6



ALF_3741
Glass diffuser with 45° angled cap
Page 7


1. Product overview

Metallic wall or ceiling lamp providing both direct and indirect light.

All versions feature a fixed, non-rotating glass shade. An optional cap is available, positioned either at 45° or parallel to the wall, enhancing wall-washing effects or signage visibility.

Available with surface-mounted or recessed canopy options. In the recessed version, the canopy sits flush against the wall. Installation requires a drill hole in drywall for the remote driver.

Model 3741 is available in recessed version only, featuring laser-cut signage for number illumination.

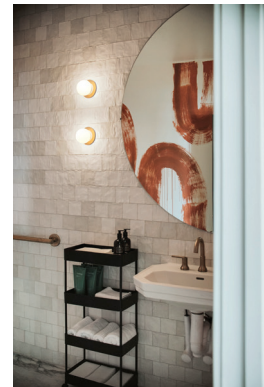

2. Finishes and Materials



26 Black
20 Metallic Gold

3. Light Source & Dimming

Lamping (Surface Canopy):

LED 3W (2700K / Ang. 120° / >90 CRI / 350mA)
100V - 240V / Typ 350 lumens

*Integrated LED module (included).

Dimming options:

Standard: NON DIMMABLE

Optional: TRIAC, CASAMBI, DALI

Lamping (Recessed Canopy):

LED 3W (2700K / Ang. 120° / >90 CRI / 350mA)
230V / Typ 350 lumens



*Integrated LED module (included).

Dimming options:

Standard: TRIAC

Optional: CASAMBI, DALI

4. Functionality

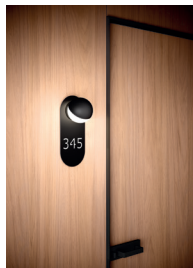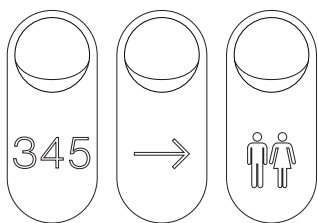


Laser-cut signage in the 3741 version.
Minimum order 13 units

5. Photometric Data and Technical Information


Photometric data corresponds to the output of each individual lamp.
Access to photometric files in download area.

2D / 3D / BIM Files available.
Access to files in download area here

3740

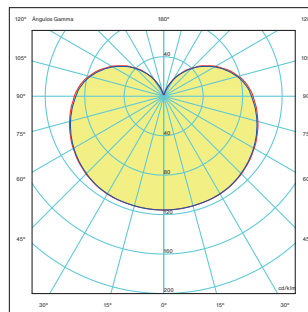

3740A and 3741

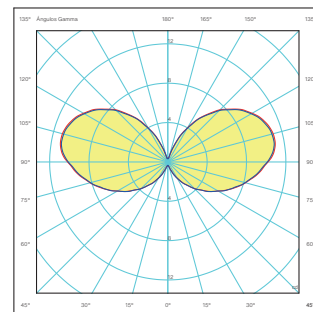

6. Installation

Surface canopy



Recessed canopy with remote driver



Ø 40 mm drill in
dropped ceiling

7. Ordering Codes

Lamping 3740S

LED 3W (2700K / Ang. 120° / >90 CRI / 350mA)

100V - 240V / Typ 350 lumens

*Integrated LED module (included).

DIM: NON DIMMABLE (Optional: TRIAC, CASAMBI, DALI)

Finishes:

20 Metallic Gold

26 Black



Drawing	Mounting	Finish Body	Ordering Code
ALF_3740S	Surface mounted. Driver in the canopy.	Metallic Gold	ALF_3740S_20W
		Black	ALF_3740S_26W

Lamping 3740R

LED 3W (2700K / Ang. 120° / >90 CRI / 350mA)

230V / Typ 350 lumens

*Integrated LED module (included).

DIM: TRIAC (Optional: CASAMBI, DALI)

Finishes:

20 Metallic Gold

26 Black



Drawing	Mounting	Finish Body	Ordering Code
ALF_3740R	Recessed, Remote driver Ø 40 mm drill in dry wall.	Metallic Gold	ALF_3740R_20W
		Black	ALF_3740R_26W

7. Ordering Codes

Lamping 3740AS

LED 3W (2700K / Ang. 120° / >90 CRI / 350mA)

100V - 240V / Typ 350 lumens


*Integrated LED module (included).

DIM: NON DIMMABLE (Optional: TRIAC, CASAMBI, DALI)

Finishes:

20 Metallic Gold

26 Black

Drawing	Mounting	Finish Body	Ordering Code
ALF_3740AS	Surface mounted. Driver in the canopy.	Metallic Gold	ALF_3740AS_20W
		Black	ALF_3740AS_26W

Lamping 3740AR

LED 3W (2700K / Ang. 120° / >90 CRI / 350mA)

230V / Typ 350 lumens


*Integrated LED module (included).


DIM: TRIAC (Optional: CASAMBI, DALI)

Finishes:

20 Metallic Gold

26 Black



Drawing	Mounting	Finish Body	Ordering Code
ALF_3740AR	Recessed, Remote driver Ø 40 mm drill in dry wall.	Metallic Gold	ALF_3740AR_20W
		Black	ALF_3740AR_26W

7. Ordering Codes

Lamping 3740A1S

LED 3W (2700K / Ang. 120° / >90 CRI / 350mA)

100V - 240V / Typ 350 lumens

*Integrated LED module (included).

DIM: NON DIMMABLE (Optional: TRIAC, CASAMBI, DALI)

Finishes:

20 Metallic Gold

26 Black



Drawing	Mounting	Finish Body	Ordering Code
ALF_3740A1S	Surface mounted. Driver in the canopy.	Metallic Gold	ALF_3740A1S_20W
		Black	ALF_3740A1S_26W

Lamping 3740A1R

LED 3W (2700K / Ang. 120° / >90 CRI / 350mA)

230V / Typ 350 lumens

*Integrated LED module (included).

DIM: TRIAC (Optional: CASAMBI, DALI)

Finishes:

20 Metallic Gold

26 Black



Drawing	Mounting	Finish Body	Ordering Code
ALF_3740A1R	Recessed, Remote driver Ø 40 mm drill in dry wall.	Metallic Gold	ALF_3740A1R_20W
		Black	ALF_3740A1R_26W

7. Ordering Codes

Lamping 3741R

LED 3W (2700K / Ang. 120° / >90 CRI / 350mA)

230V / Typ 350 lumens

*Integrated LED module (included).

DIM: TRIAC (Optional: CASAMBI, DALI)

Minimum order 13 units.

Laser-cut signage.

Finishes:


20 Metallic Gold

26 Black



Drawing	Mounting	Finish Body	Ordering Code
ALF_3741R	Recessed, Remote driver Ø 40 mm drill in dry wall.	Metallic Gold	ALF_3741R_20W
		Black	ALF_3741R_26W

8. Certifications & Standards



Warranty: 2 years

100% made in Spain

9. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.