

FRAME

Aqueni

^(ENG) Frame has a timeless simplicity, providing a sophisticated solution to lighting paths and exterior walls. The sconces work nicely inside, too. The frames are metal with two layers of powder coat finish for maximum resistance to the elements, ensuring long-lasting elegance. Inside, a ridged cylindrical pyrex glass diffuser. ^(ESP) Frame tiene una sencillez atemporal que proporciona una solución sofisticada para iluminar caminos y fachadas. La estructura de metal está protegida con una doble capa de pintura en polvo extremadamente resistente a la corrosión para asegurar una elegancia duradera. La pieza central es un difusor de pyrex texturizado.










Offices JCM Technologies



FRAME · SPEC SHEET


A-4053X

LED 6,2W
(2700K / Ang. 70°
>90 CRI / 350mA)
100V - 240V
Typ* 725 lumens
Non Dimmable
Transparent pyrex glass

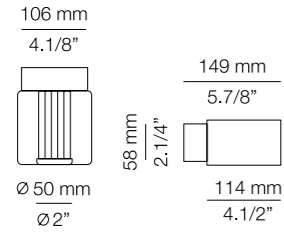


A-4050

LED 6,2W
(2700K / Ang. 70°
>90 CRI / 350mA)
100V - 240V / Typ* 725 lumens
Non Dimmable
Satinated pyrex glass

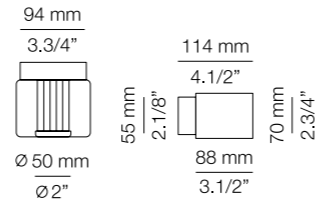


P-4054X

LED 6,2W
(2700K / Ang. 70°
>90 CRI / 350mA)
100V - 240V
Typ* 725 lumens
Non Dimmable
Hard wired (no plug)
Transparent pyrex glass

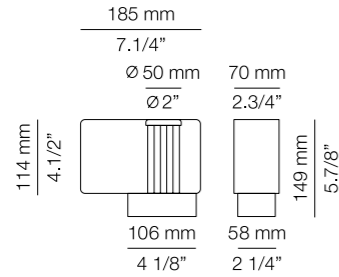


A-4051

LED 6,2W
(2700K / Ang. 70°
>90 CRI / 350mA)
100V - 240V / Typ* 725 lumens
Non Dimmable
Satinated pyrex glass
Optional laser cut signage

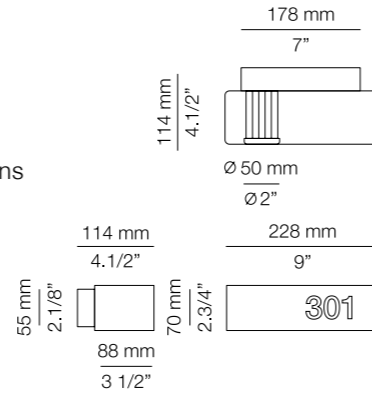

P-4055X

LED 6,2W
(2700K / Ang. 70°
>90 CRI / 350mA)
100V - 240V
Typ* 725 lumens
Non Dimmable
Hard wired (no plug)
Transparent pyrex glass

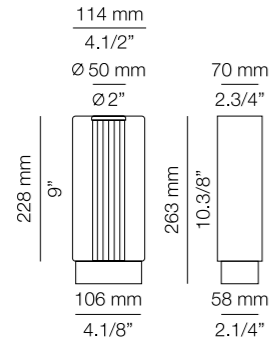


Contract Option



P-4056X

LED 6,2W
(2700K / Ang. 70°
>90 CRI / 350mA)
100V - 240V
Typ* 725 lumens
Non Dimmable
Hard wired (no plug)
Transparent pyrex glass

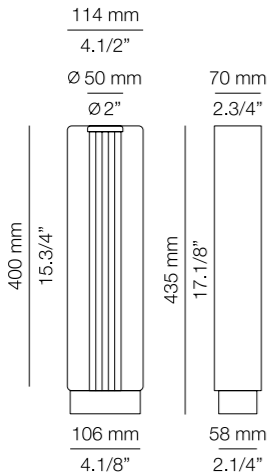

Finish Outdoor

- 96 BLK ANT

Additional

Double layer coating for high resistance to corrosion and other maritime environmental conditions.

We offer custom finishes, sizes, and alternate lamping for projects.

Photographs may show non-standard products.



Finish Indoor

- 74 WH
- 96 BLK ANT

Additional

We offer custom finishes, sizes, and alternate lamping for projects.

Contract option minimum quantity required.

Photographs may show non-standard products.

