



Bravo

Manel Llusçà

Pendant Bravo LED 42.2 LED warm-white 3000K PHASE CUT Gold 3075lm

Technical features

Luminaire total power: 42.2W

Real lumens: 3075

Real lm/W: 73

Correlated Colour Temperature (CCT): LED warm-white 3000K

Lens / reflector angle: FLOOD 84°

UGR: <=22

Structure material: Aluminium

Structure finish: Gold

Diffuser material: Acrylic

Diffuser finish: Opal

Driver Brand: MEANWELL

Voltage / frequency: 220-240V/50-60Hz

Dimming protocol: PHASE CUT

Power Factor: 0.90

Useful life: 50,000h L80B20

Warranty: 5 años



Luminotechnic features

Luminance C0°G65°: 2853

CRI: 80

MacAdam steps: 3

Photobiological risk: RG1

UGR	
S=0.250	
Ceiling / cavity	0.7
Walls	0.5
Working Plane	0.2
Room dimensions	X=4H, Y=8H
UGR crosswise	19.3
UGR lengthwise	23.7

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	37W	LED warm-white 3000K

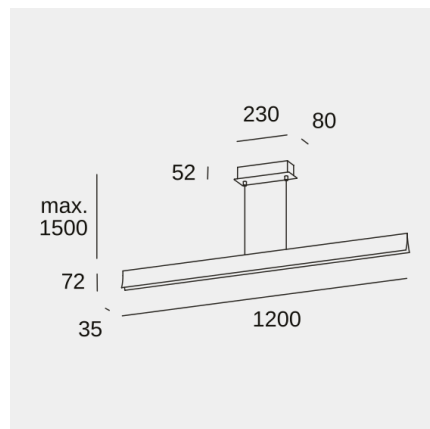


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



Bravo

Manel Llusçà

Pendant Bravo LED 42.2 LED warm-white 3000K PHASE CUT Gold 3075lm

Logistics



x 4

Net weight (kg): 1.88

Packaged weight (kg): 2.92

Packaging: 150mm x 95mm x 1240mm

Light application



Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.