



Prolix Surface

Nahtrang Studio

Pendant Prolix Surface LED 10.4 LED warm-white 2700K PHASE CUT Black 320lm

Technical features

Luminaire total power: 10.4W
Real lumens: 320
Real lm/W: 31
Correlated Colour Temperature (CCT): LED warm-white 2700K
Lens / reflector angle: FLOOD 51°
UGR: <=16
Structure material: Aluminium
Structure finish: Black
Diffuser material: Methacrylate
Diffuser finish: Transparent
Driver Brand: HEP
Voltage / frequency: 220-240VAC/50-60Hz
Dimming protocol: PHASE CUT
Power Factor: 0.99
THD%: 14.7
Useful life: 50,000h L80B20
Warranty: 5 años



Luminotechnic features

Luminance C0°G65°: 842
Luminance C90°G65°: 842
TM30 RG: 90
TM30 RF: 100
Melanopic ratio: 0.509
CRI: 90
MacAdam steps: 3
Photobiological risk: RG2

UGR		Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
S=0.250					
Ceiling / cavity	0.7	LED	1	8.4W	LED warm-white 2700K
Walls	0.5				
Working Plane	0.2				
Room dimensions	X=4H, Y=8H				
UGR crosswise	6.7				
UGR lengthwise	6.7				

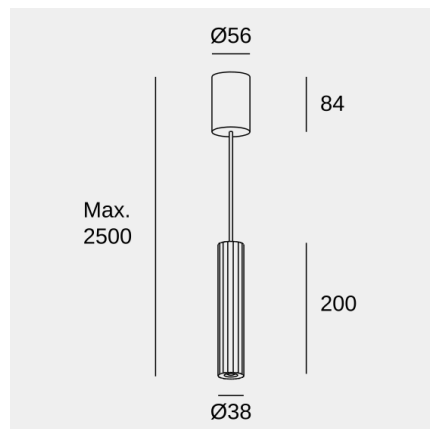


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



Prolix Surface

Nahtrang Studio

Pendant Prolix Surface LED 10.4 LED warm-white 2700K PHASE CUT Black 320lm

Logistics



x 20

Net weight (kg): 0.55

Packaged weight (kg): 0.68

Packaging: 220mm x 125mm x 80mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.