



Prolix Recessed

Nahtrang Studio

Pendant Prolix Recessed LED 10.4 LED warm-white 2700K PHASE CUT Black 320lm

Technical features

- Luminaire total power: 10.4W
- Real lumens: 320
- Real lm/W: 31
- Correlated Colour Temperature (CCT): LED warm-white 2700K
- Lens / reflector angle: FLOOD 51°
- UGR: <=16
- Structure material: Aluminium
- Structure finish: Black
- Diffuser material: Methacrylate
- Diffuser finish: Transparent
- Driver Brand: HEP
- Voltage / frequency: 220-240VAC/50-60Hz
- Dimming protocol: PHASE CUT
- Power Factor: 0.96
- THD%: 18
- Useful life: 50,000h L80B20
- Warranty: 5 años



Luminotechnic features

- Luminance C0°G65°: 842
- Luminance C90°G65°: 842
- TM30 RG: 90
- TM30 RF: 100
- Melanopic ratio: 0.509
- CRI: 90
- MacAdam steps: 3
- Photobiological risk: RG2

UGR		Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
S=0.250					
Ceiling / cavity	0.7	LED	1	8.4W	LED warm-white 2700K
Walls	0.5				
Working Plane	0.2				
Room dimensions	X=4H, Y=8H				
UGR crosswise	6.7				
UGR lengthwise	6.7				

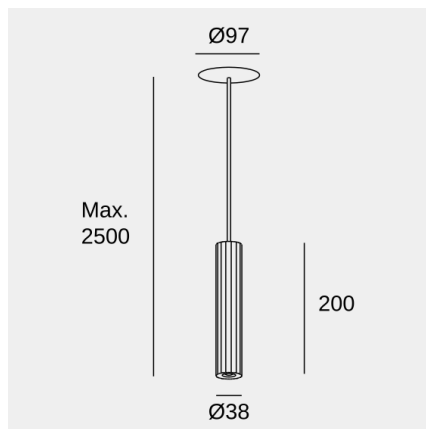


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.




Prolix Recessed

Nahtrang Studio

Pendant Prolix Recessed LED 10.4 LED warm-white 2700K PHASE CUT Black 320lm

Logistics



x 20

Net weight (kg): 0.75

Packaged weight (kg): 0.88

Packaging: 220mm x 125mm x 80mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.