



Schematic light drawing



Photometric

Light distribution	Roto symmetric
CCT (K)	2700
CRI>	95

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	200-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Spare Parts

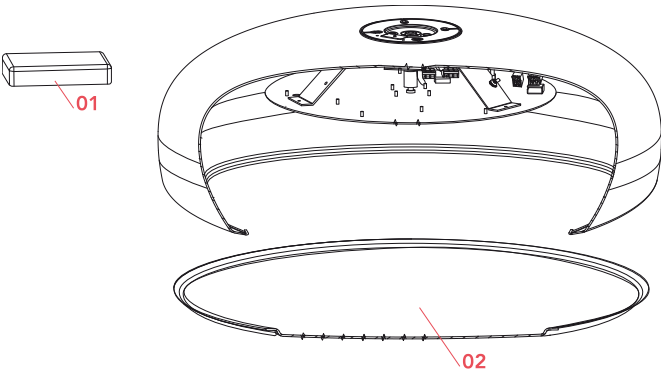

- | | | |
|-----|-----------------------|---------|
| 01. | Driver 45W 450-1050mA | RF31980 |
| 02. | Methacrylate diffuser | RF19022 |

DOWNLOAD



RF31980

Driver 45W 450-1050mA



RF19022

Methacrylate diffuser