

Smithfield Suspension Pro dimmable DALI

Designed by Jasper Morrison, 2009



45W - 2791lm - 2700K

Suspension lamp with direct light. Aluminium body. Available in gloss black, white, matte black, green, red or MUD. Injection-moulded opalescent methacrylate diffuser. Steel ceiling attachment with steel suspension cable, 5 pole electric cable in PTFE double insulation, working length 2700 mm. Control DALI dimmable.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607015148
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	45
System flux (lm)	2791

Physical

Colour	Matte Black
Length (mm)	600
Cord length (mm)	2700
Canopy dimension (mm)	36
Canopy width (mm)	146
Net weight (kg)	5.8
Package height (mm)	310
Package width (mm)	710
Package length (mm)	710
Package volume (m3)	0.16
IP internal	20

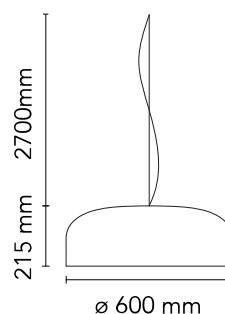

Download

Mounting instructions [↓ PDF](#)

Spare Parts [↓ PDF](#)

Photometric Files

LDT / IES [↓ LDT](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)



Schematic light drawing



Photometric


Light distribution	Roto symmetric
CCT (K)	2700

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	200-240
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Spare Parts

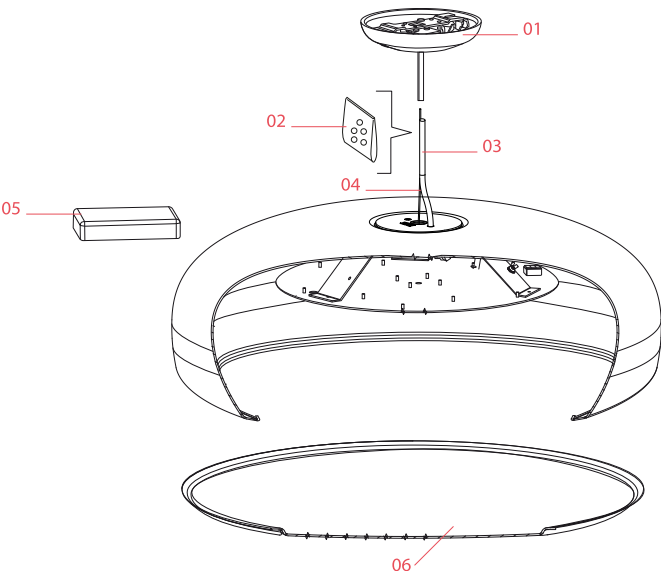

01.	Opal black ceiling rose assembly	RF6410431
02.	Kit of 5 or rings	RF05382
03.	2,7mt fep/pvc 5x0,75 transparent cable	RF29934
04.	3 mt steel cable ø1,2 with 19 winded wires	RF29665
05.	Driver 60W 500-1400mA 200-240V	RF31674
06.	Methacrylate diffuser	RF19022

DOWNLOAD



RF6410431

Opal black ceiling rose assembly



RF05382

Kit of 5 or rings

RF29934

2,7mt fep/pvc 5x0,75 transparent cable



RF29665

3 mt steel cable ø1,2 with 19 winded wires



RF31674

Driver 60W 500-1400mA 200-240V



RF19022

Methacrylate diffuser