

# FLOS

 F1367039 Green

## Smithfield Suspension Pro

Designed by Jasper Morrison, 2009



45W - 2791lm - 2700K - CRI> 95

Suspension lamp with direct light. Aluminium body. Available in gloss black, matt black, red, green, white or MUD. Injection-moulded opalescent methacrylate diffuser. Steel ceiling attachment with steel suspension cable, 5 pole electric cable in PTFE double insulation, working length 2700mm.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

### Main specifications

|                   |                     |
|-------------------|---------------------|
| EAN               | 8059607015001       |
| Mounting          | Suspension          |
| Environments      | Indoor dry location |
| Light Source Type | LED                 |
| LED type          | LED Module          |
| Power (W)         | 45                  |
| System power (W)  | 45                  |
| System flux (lm)  | 2791                |

### Physical

|                       |       |
|-----------------------|-------|
| Colour                | Green |
| Length (mm)           | 600   |
| Cord length (mm)      | 2700  |
| Canopy dimension (mm) | 36    |
| Canopy width (mm)     | 146   |
| Net weight (kg)       | 5.8   |
| Package height (mm)   | 310   |
| Package width (mm)    | 710   |
| Package length (mm)   | 710   |
| Package volume (m3)   | 0.16  |
| IP internal           | 20    |



### Download

Mounting instructions  PDF

Spare Parts  PDF

### Photometric Files

LDT / IES  LDT

### Technical Drawings

2D  ZIP

3D  ZIP

 Bim  ZIP



Schematic light drawing



Photometric

|                    |                |
|--------------------|----------------|
| Light distribution | Roto symmetric |
| CCT (K)            | 2700           |
| CRI>               | 95             |

Electrical


|                      |               |
|----------------------|---------------|
| Insulation class     | I             |
| Frequency (Hz)       | 50/60         |
| Main voltage (Vac)   | 200-240       |
| LED voltage Vf (Vdc) | null          |
| Driver               | Integrated    |
| Dimming type         | Dimmable Push |
| Batteries inside     | No            |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Spare Parts

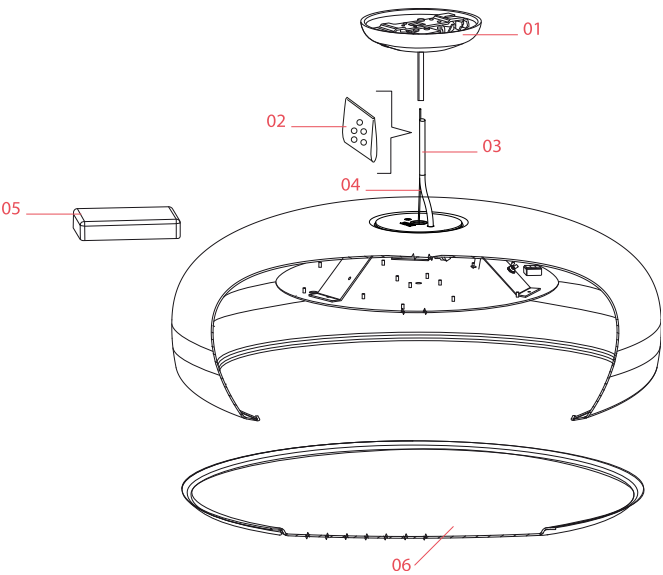

- |     |                                            |           |
|-----|--------------------------------------------|-----------|
| 01. | Green rose assembly                        | RF1367039 |
| 02. | Kit of 5 or rings                          | RF05382   |
| 03. | 2,7mt fep/pvc 5x0,75 transparent cable     | RF29934   |
| 04. | 3 mt steel cable ø1,2 with 19 winded wires | RF29665   |
| 05. | Driver 60W 500-1400mA 200-240V             | RF31674   |
| 06. | Methacrylate diffuser                      | RF19022   |

DOWNLOAD



RF1367039  
Green rose assembly



RF05382  
Kit of 5 or rings

RF29934  
2,7mt fep/pvc 5x0,75 transparent  
cable



RF29665  
3 mt steel cable ø1,2 with 19  
winded wires



RF31674  
Driver 60W 500-1400mA 200-  
240V



RF19022  
Methacrylate diffuser