

FLOS


■ F6607030 Black

Taccia (PMMA)

Designed by Achille and Pier Giacomo Castiglioni, 1962

28W - 2700K

Table lamp providing indirect and reflected light. Reflector in painted aluminium, gloss white on the outside and matt white on the inside. Directionable diffuser in transparent PMMA. Body in matt black or naturally anodized extruded aluminium. Base in nickel-plated metal. Electric cable of useful length 220 cm, with dimmer switch for ON/OFF and adjustment of the light flow between 10-100%. Plug-in power supply with interchangeable plugs.

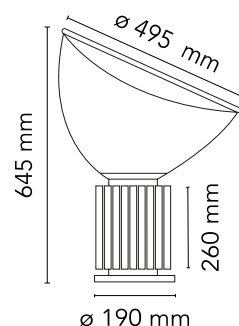

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

| | |
|------------------------|---------------------|
| Mounting | Table |
| Environments | Indoor dry location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | LED array |
| Power (W) | 28 |

Physical

| | |
|---------------------|-------|
| Colour | Black |
| Length (mm) | 190 |
| Cord colour | Black |
| Cord length (mm) | 2200 |
| Net weight (kg) | 7.6 |
| Package volume (m3) | 0.18 |
| IP internal | 20 |

Download


Mounting instructions  PDF
Mounting instructions  PDF

Ecodesign and Energy Labelling


This product contains a light source of energy efficiency class D



Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

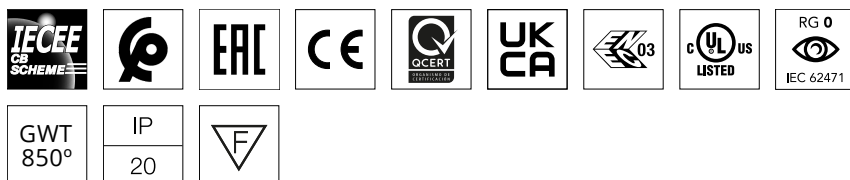


Photometric

| | |
|--------------------|------------|
| Lighting type | Indirect |
| Light distribution | Asymmetric |
| CCT (K) | 2700 |
| Extreme cut off | No |

Electrical

| | |
|--------------------|------------------------|
| Insulation class | III |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 100-240 |
| Power supply | Remote included |
| Dimmable | Yes |
| Power supply type | Electronic 48V |
| Dimming interface | Dimmer Integrated |
| Plug type | Type G, Type A, Type C |
| Batteries inside | No |

Spare Parts

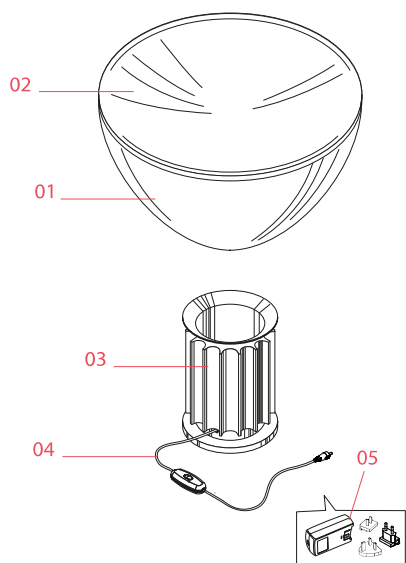

| | | |
|-----|--|-----------|
| 01. | Taccia LED transparent diffuser & reflector (PMMA) | F6609000 |
| 02. | White reflector | RF00780 |
| 03. | Black base | F6608030 |
| 04. | Jack plug with cable and push dimmer | RF6608100 |
| 05. | Black plug assembly kit & 48V driver | RF6600130 |



F6609000
Taccia LED transparent diffuser & reflector (PMMA)



RF00780
White reflector



F6608030
Black base



RF6608100
Jack plug with cable and push dimmer



RF6600130
Black plug assembly kit & 48V driver