

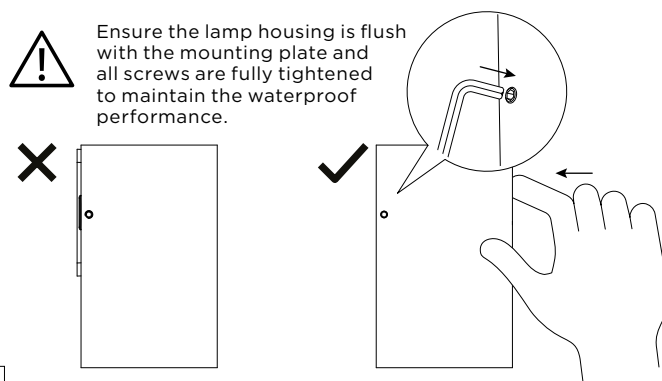


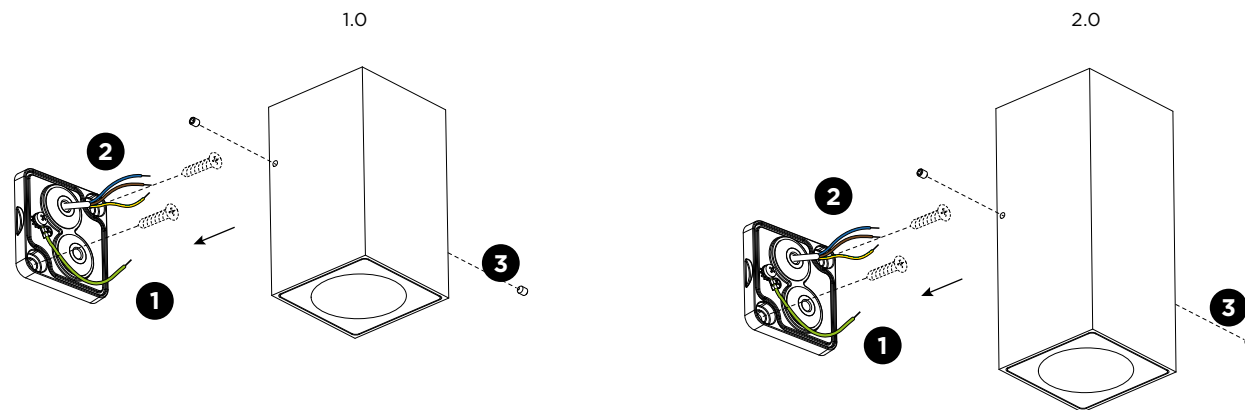


Mounting base:



	A	B	C
			
CABLE			
TYPE	ROUND H05RN-F H07RN8-F H07RN-F	ROUND H05RN-F	ROUND
OUTSIDE Ø	min. 6,8 mm max. 8,9 mm	min. 5 mm max. 6,5 mm	min. 1,5 mm max. 2,6 mm
CONDUCTION SECTION	2 or 3x0,75 mm ² 2 or 3x1,0 mm ² 2 or 3x1,5 mm ²	2 or 3x0,75 mm ² 2x1,0 mm ²	0,75 mm ² 1,5 mm ²

DIMENSIONS




MOUNTING INSTRUCTION


- 1 Remove the mounting base from the luminaire by loosening the socket screws and mount it on the wall with screws (screws are not included).

2 POWER CONNECTION


Connect to 220-240V.

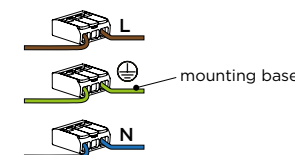

Connect the earth cable.



Always use a matching grommet based on the used 220-240V cable and the corresponding type in the overview table.

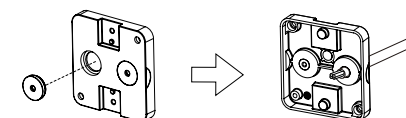


Push the grommet into the backplate.

Pull the cable through the backplate.



- 3 Fix the luminaire on the base with the socket screws.



1.0

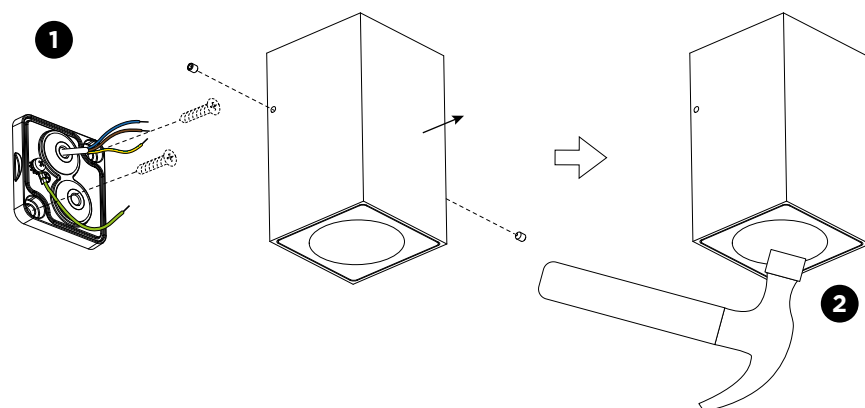


2.0

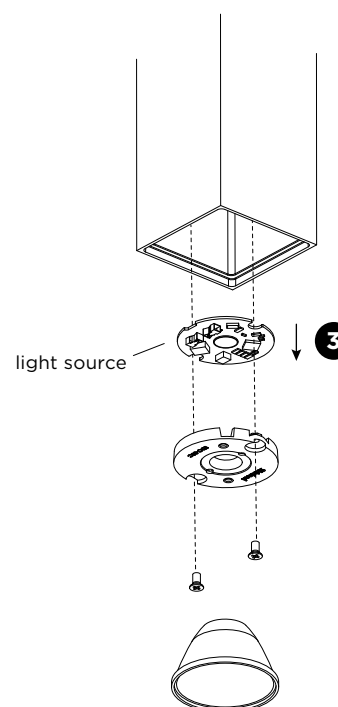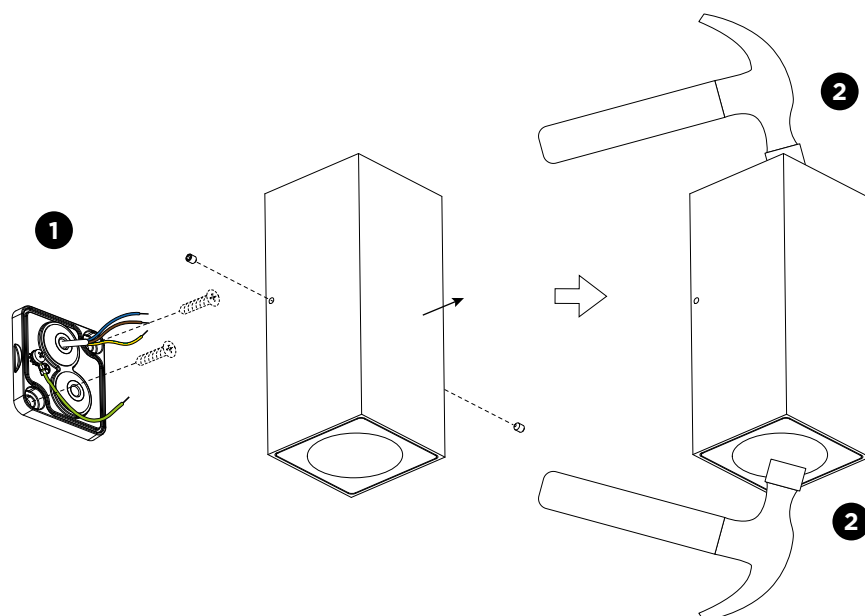

DISMOUNTING INSTRUCTION

Light source


- 1 Loosen the socket screws, disconnect wires, and remove the fixture from the mounting base.
- 2 Break the glass.
- 3 Take out the lens(es) and unscrew the holder(s) to remove the light source(s).



The light source is not replaceable.



This luminaire contains a light source with the energy class F.



Use green electricity to light up your luminaire.