


TUBE CARRÉ CEILING PAR16


INSTALLATION INSTRUCTIONS | APRIL 2025

backplate:




Always use a matching grommet in the overview table.

	A	B	C
CABLE			
TYPE	ROUND H05RN-F H07RN8-F H07RN-F	ROUND H05RN-F	ROUND
OUTSIDE Ø	min 6.8mm max 8.9mm	min 5mm max 6.8mm	min 1.5mm max 2.6mm
CONDUCTION SECTION	2or3x 0.75mm ² 2or3x 1.0mm ² 2or3x 1.5mm ²	2or3x 0.75mm ² 2x 1.0mm ²	0.75mm ² 1.5mm ²

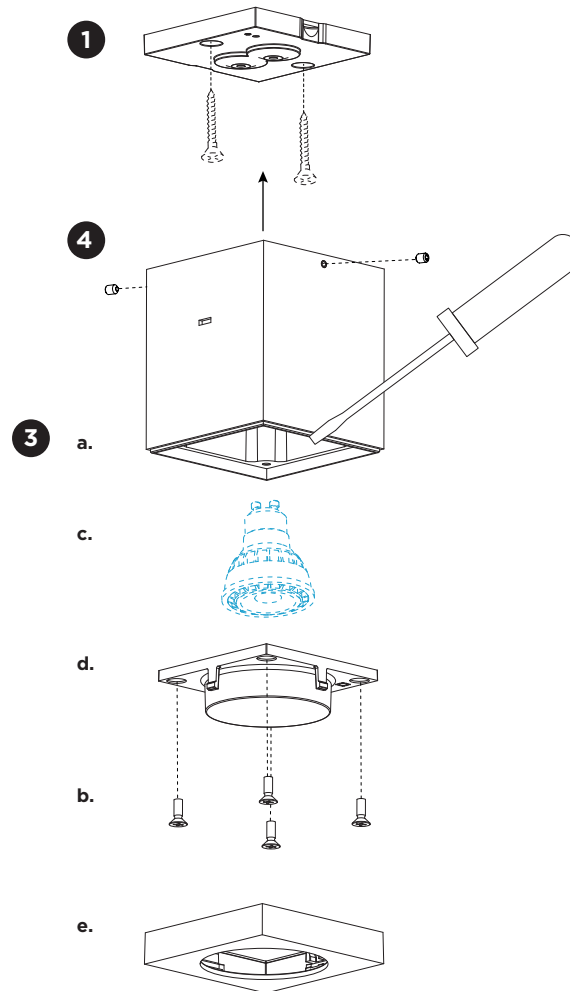

DIMENSIONS



1.0 PAR16

MOUNTING INSTRUCTION

- 1 Remove the backplate by loosening the socket screws and mount it on the ceiling with screws (screws are not included).


2 POWER CONNECTION

Connect to 220-240V.

Connect the earth cable.



Always use a matching grommet based on the used 220-240V cable and the corresponding type in the overview table.

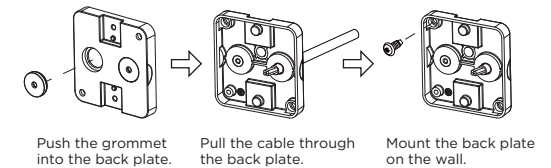

- 3
 - a. Open the cover with a flat screwdriver.
 - b. Loosen the four screws of the glass cover and remove it.
 - c. Insert the lamp.
 - d. Put back the glass cover with the four screws.
 - e. Place back the body cover by pushing.
- 4 Mount the luminaire on the backplate with the socket screws.

WEVER & DUCRÉ BV

Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com