



TUBE CARRÉ 2.0

INSTALLATION INSTRUCTIONS | JUNE 2024

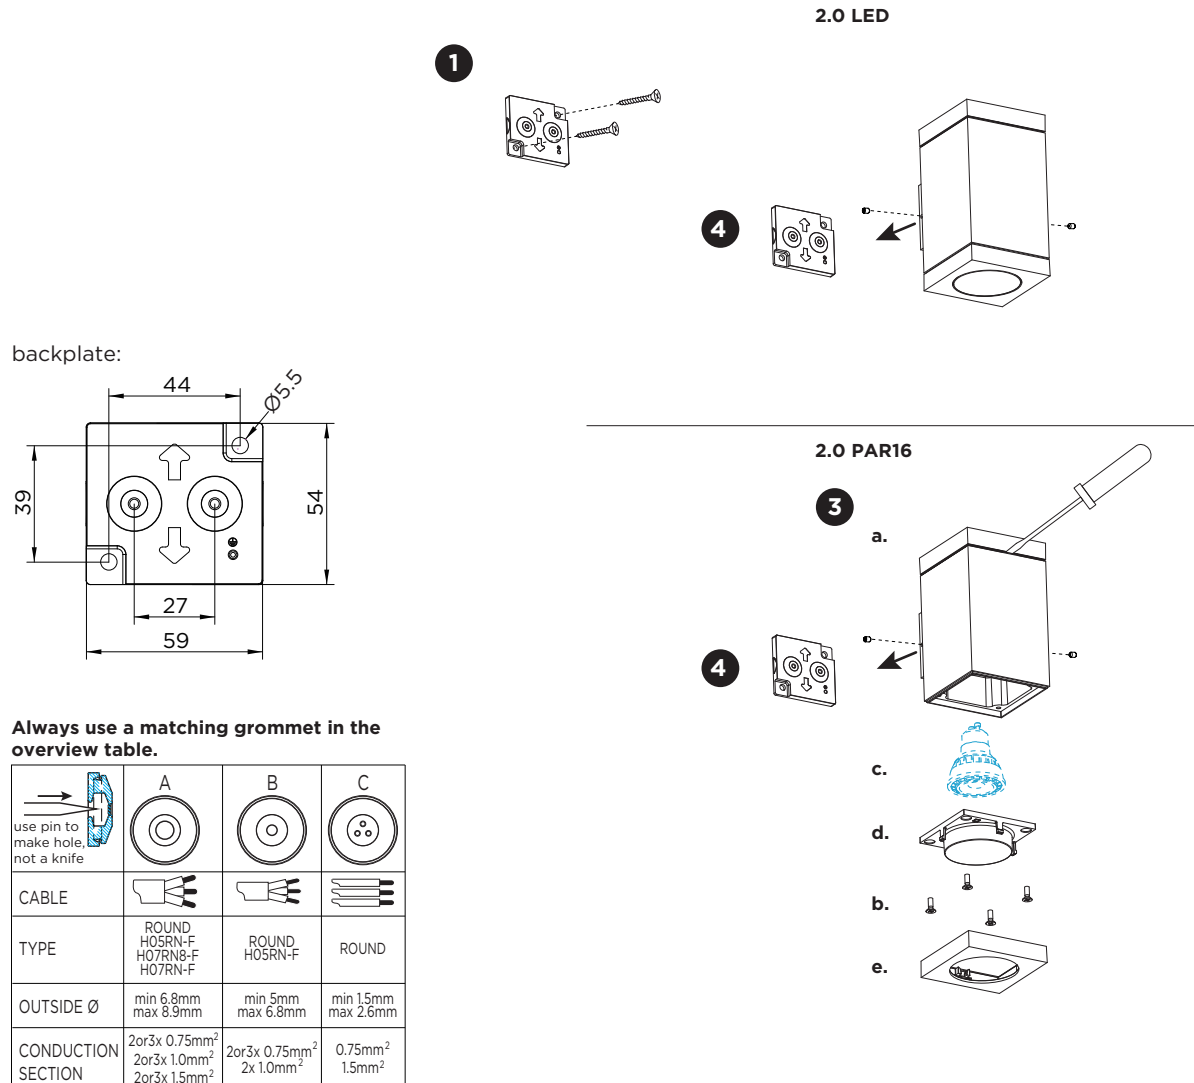

DIMENSIONS



MOUNTING INSTRUCTION

- 1 Remove the backplate by loosening the socket screws and fix it to the wall with screws (screws are not included).


2 POWER CONNECTION

Connect to 220-240V.

Connect the earth cable.





Always use a matching grommet based on the used 220-240V cable and the corresponding type in the overview table.

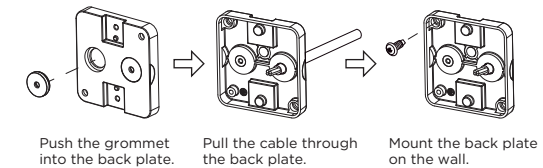

- 3 For PAR16 version:
- Open the cover with a flat screwdriver.
 - Loosen the four screws of the glass cover and remove it.
 - Insert the lamp.
 - Put back the glass cover with the four screws.
 - Place back the body cover by pushing.
- 4 Mount the luminaire on the backplate with the socket screws.

TUBE CARRÉ 2.0


INSTALLATION INSTRUCTIONS | JUNE 2024

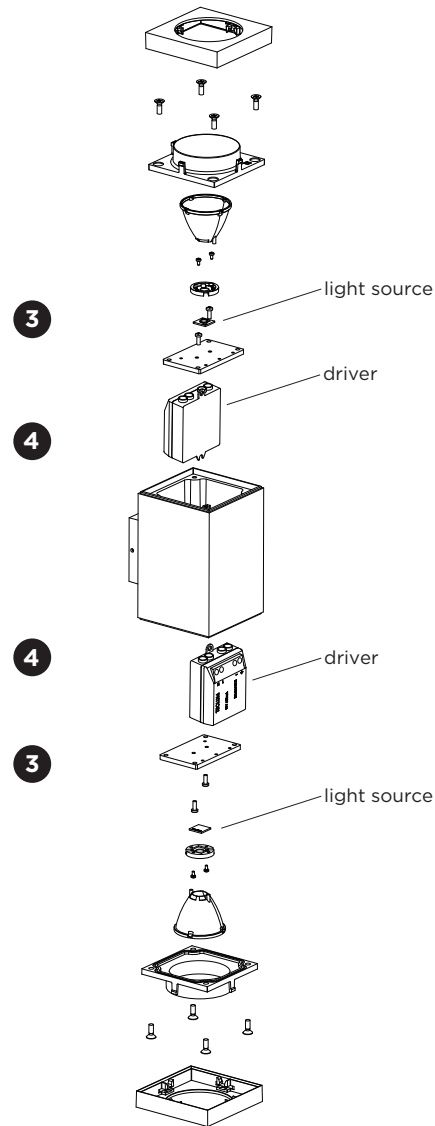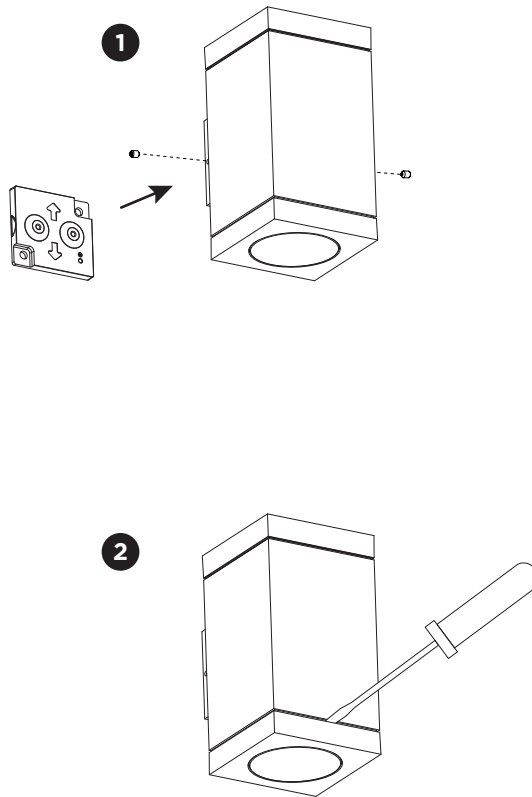


DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source & driver

- 1 Disconnect the fixture from the wall by loosening the socket screws and the wiring.
- 2 Remove the cover(s) with a flat screwdriver.
- 3 Unscrew the glass cover(s), remove the reflector(s) and unscrew the holder(s) to remove the light source(s).
- 4 Unscrew the plate(s) and loosen the wires and screws to remove the driver(s).



The light source is replaceable by Wever & Ducré or by a professional with explicit authorization . For more information please contact your local Wever & Ducré customer service point.



The driver can be replaced by the end user.



This luminaire contains a light source with the energy class F.