


ASSEMBLY INSTRUCTIONS

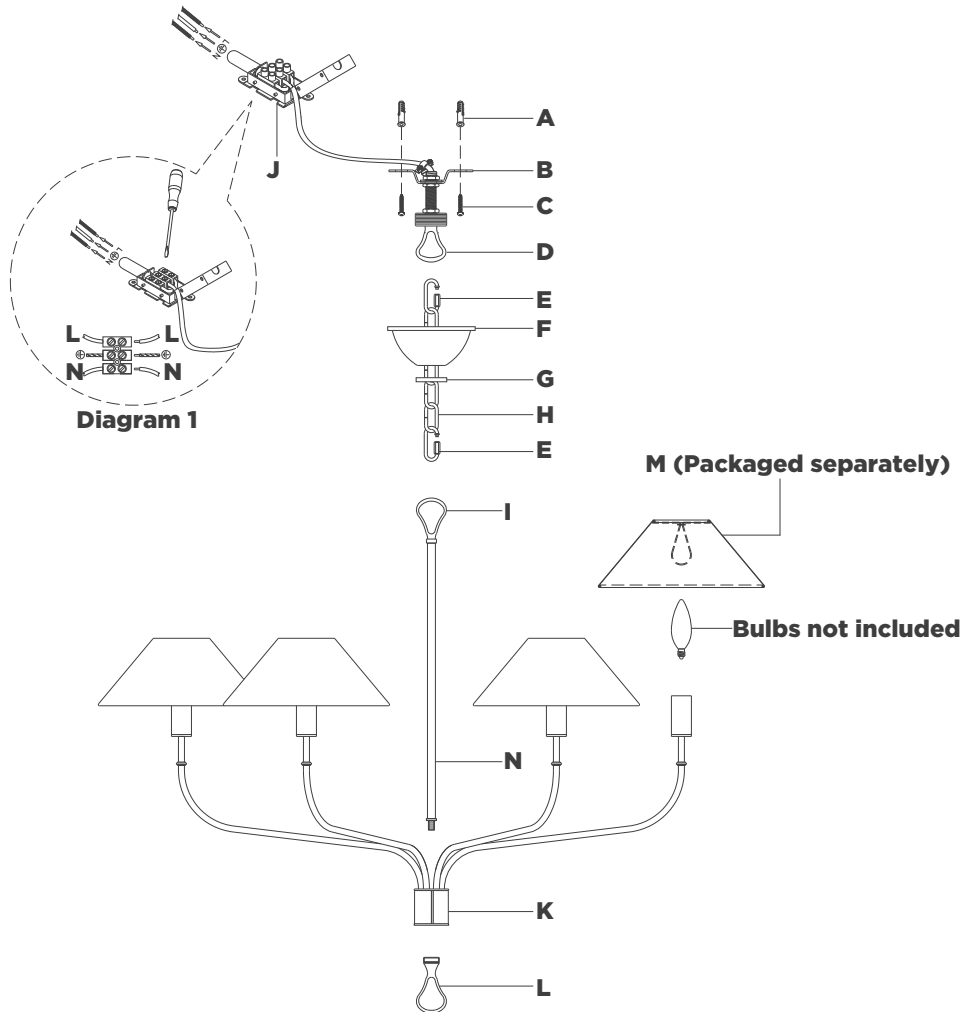

Griffin Extra Large Tail Chandelier

Item # AL5005-EU

NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Strippers
Slip Joint Pliers	Measuring Tape	Chain Pliers
Wire Cutters	Hammer	Pencil
Drill		

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate **(B)** from canopy **(F)** by removing collar ring **(G)**.
3. Using mounting plate **(B)** as a guide, line up with the ceiling and mark anchor positions.
4. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors **(A)** into the holes using a hammer.
5. Install mounting plate **(B)** to ceiling and secure with wood screws **(C)** to anchors **(A)**.
6. Secure collar loop **(D)** to mounting plate **(B)** using pliers to tighten locknut.
7. Install canopy **(F)** to mounting plate **(B)** and secure with collar ring **(G)**.
8. Determine desired overall length, and amount of chain **(H)** needed. Shorten chain using chain pliers. (Keep extra chain)
9. Thread rod **(N)** to fixture **(K)**.
10. Attach chain **(H)** to collar loop **(D)** and to fixture loop **(I)** using quick links **(E)**. Secure quick links **(E)**.

ASSEMBLY INSTRUCTIONS

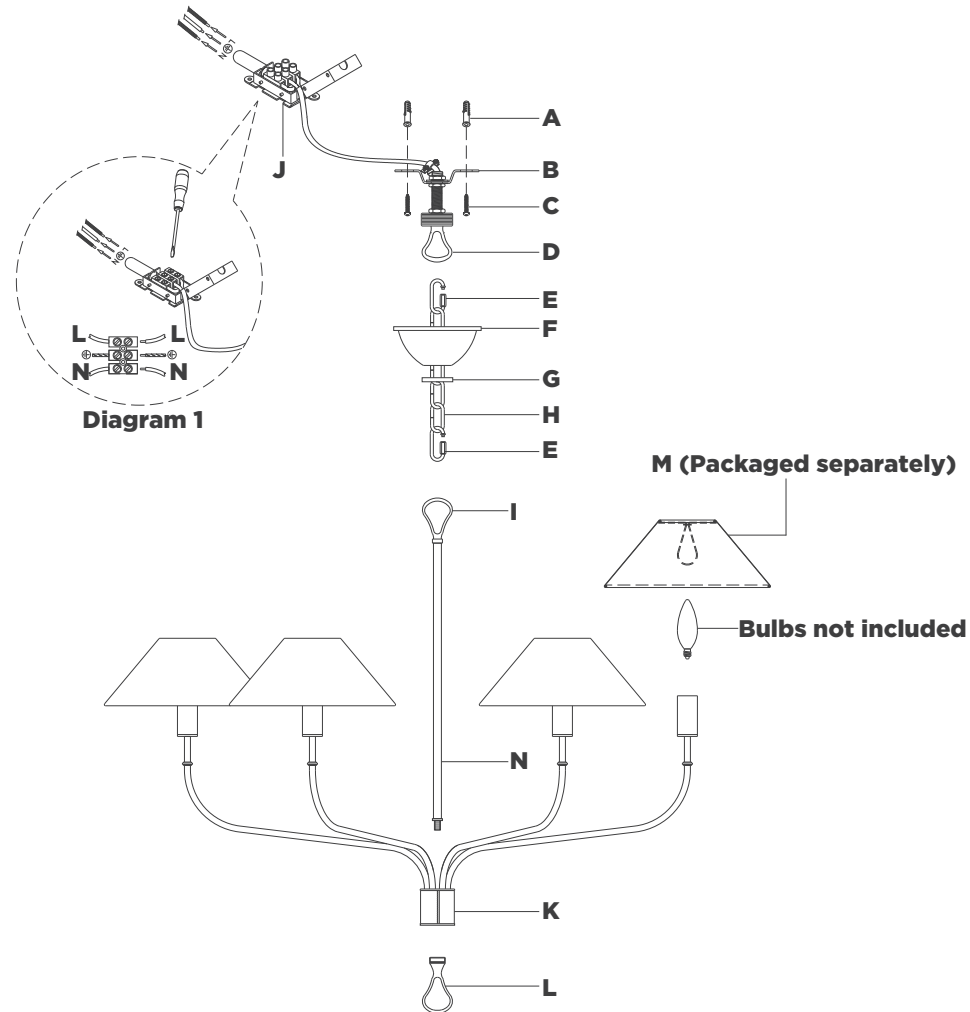

Griffin Extra Large Tail Chandelier


Item # AL5005-EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

11. Thread fixture wires through chain **(H)**.
NOTE: When you reach the collar loop **(D)**, ensure there is no tension on the wires. Cut excess wires, being sure to leave enough to reach terminal block **(J)**.
12. Remove outer housing of wire by making a neat cut all the way around, about 2.0 cm from the end. Once cut is made, remove and discard the piece of housing, exposing the electrical wires.
NOTE: Make sure not to cut too deep into housing or electrical wires could become damaged.
13. Separate wires, and strip insulation on each 6 mm.
14. Loosen collar ring **(G)** and let canopy **(F)** slip down chain **(H)** carefully.
15. Twist all fixture wires together, and slip through center hole of collar loop **(D)**.
NOTE: Untwist wires and separate to prepare for connection.
16. Open terminal block **(J)** to prepare for installation of electrical wires. Use diagram 1 to reference electrical installation steps below.
17. Connect fixture ground (green) and supply ground (usually green or yellow) to terminal block **(J)** and secure with screws.
NOTE: It is imperative that the fixture is grounded.
- 18.

ASSEMBLY INSTRUCTIONS

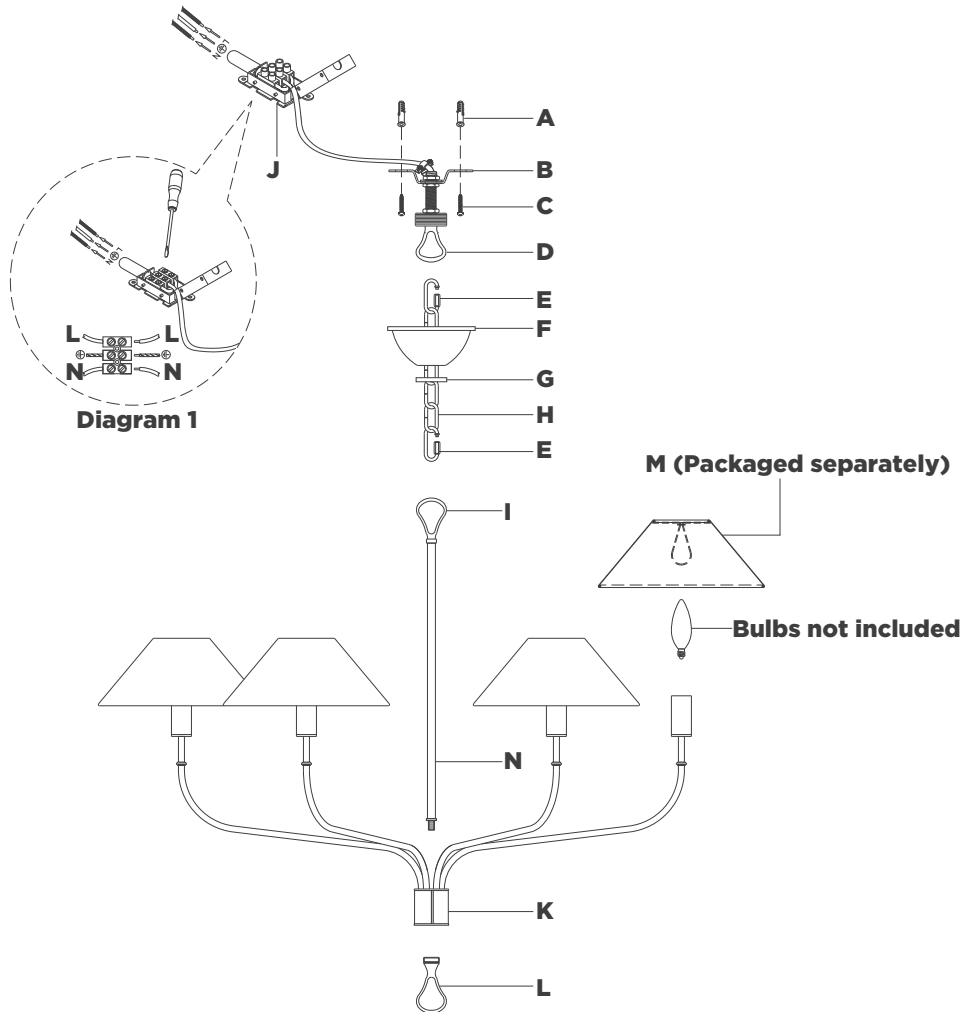

Griffin Extra Large Tail Chandelier

Item # AL5005-EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

18. Connect neutral wires (blue) to terminal block **(J)** and secure with screws.
19. Connect hot wires (brown) to terminal block **(J)** and secure with screws. Close terminal block **(J)**.
CAUTION: Do not reverse the hot and neutral connections.
20. Install canopy **(F)** to collar loop **(D)** and secure with collar ring **(G)**.
21. Install light bulbs into the sockets.
22. Remove shades **(M)** from packaging, then clip shades **(M)** onto the bulbs.
NOTE: If shade has additional packaging, carefully cut from interior of shade to avoid damage.
23. Thread finial **(L)** to the bottom of fixture **(K)**.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.