


ASSEMBLY INSTRUCTIONS

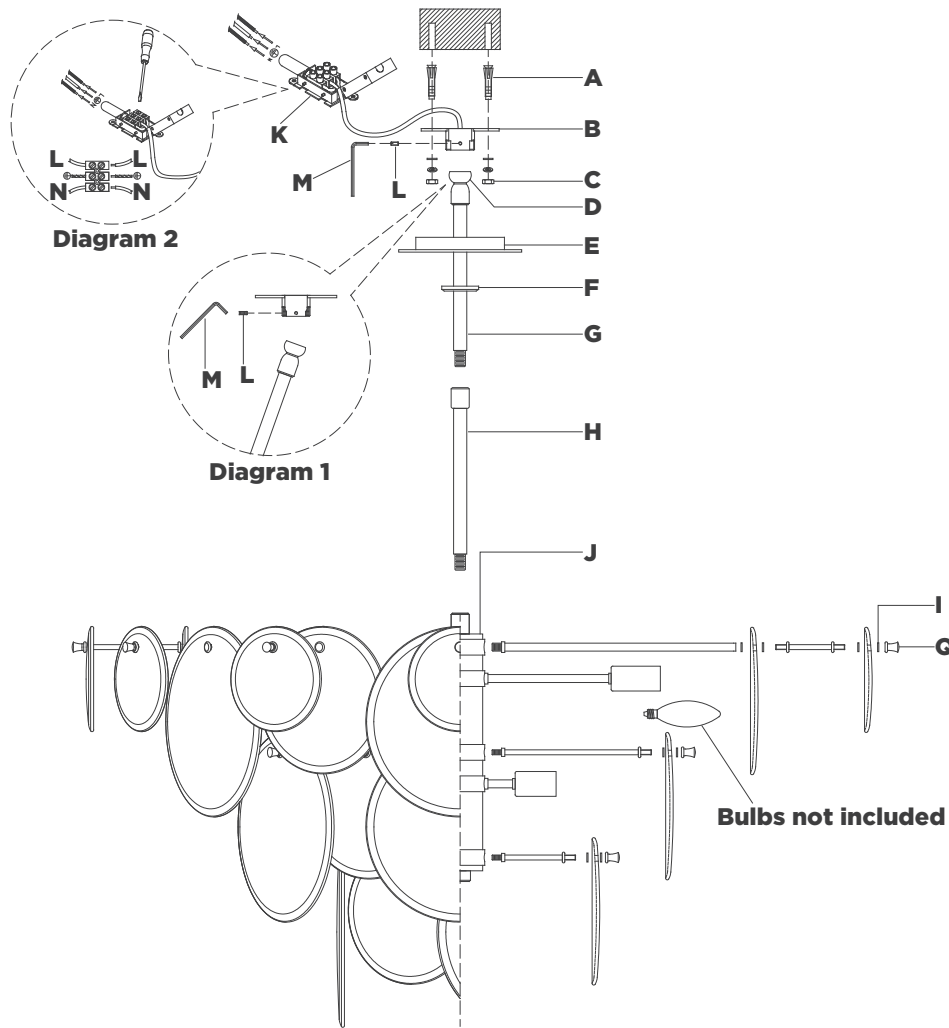

Loire Large Chandelier

Item # ARN5450-EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Strippers
Wire Cutters	Hammer	Pencil
Hammer		

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove canopy **(E)** from mounting plate **(B)** by removing collar ring **(F)**.
3. Using mounting plate **(B)** as a guide, line up with the ceiling and mark expansion anchors positions.
4. Using a drill bit slightly smaller than the expansion anchors, drill holes in the marked positions. Install expansion anchors and screws **(A)** into the holes using a hammer.
5. Line up mounting plate **(B)** to expansion anchors and add washers, lock washers and mounting nuts **(C)**. Secure by tightening mounting nuts.
6. Feed electrical wires through bottom rod **(H)** and connect to fixture **(J)**.
7. Continue feeding wires through collar ring **(F)**, canopy **(E)**, and top rod **(G)**.
8. Holding fixture upright, slide collar ring **(F)** and canopy **(E)** down and rest on fixture **(J)**. Then connect top rod **(G)** to bottom rod **(H)**.

NOTE: Slide components down slowly to avoid damage.

ASSEMBLY INSTRUCTIONS

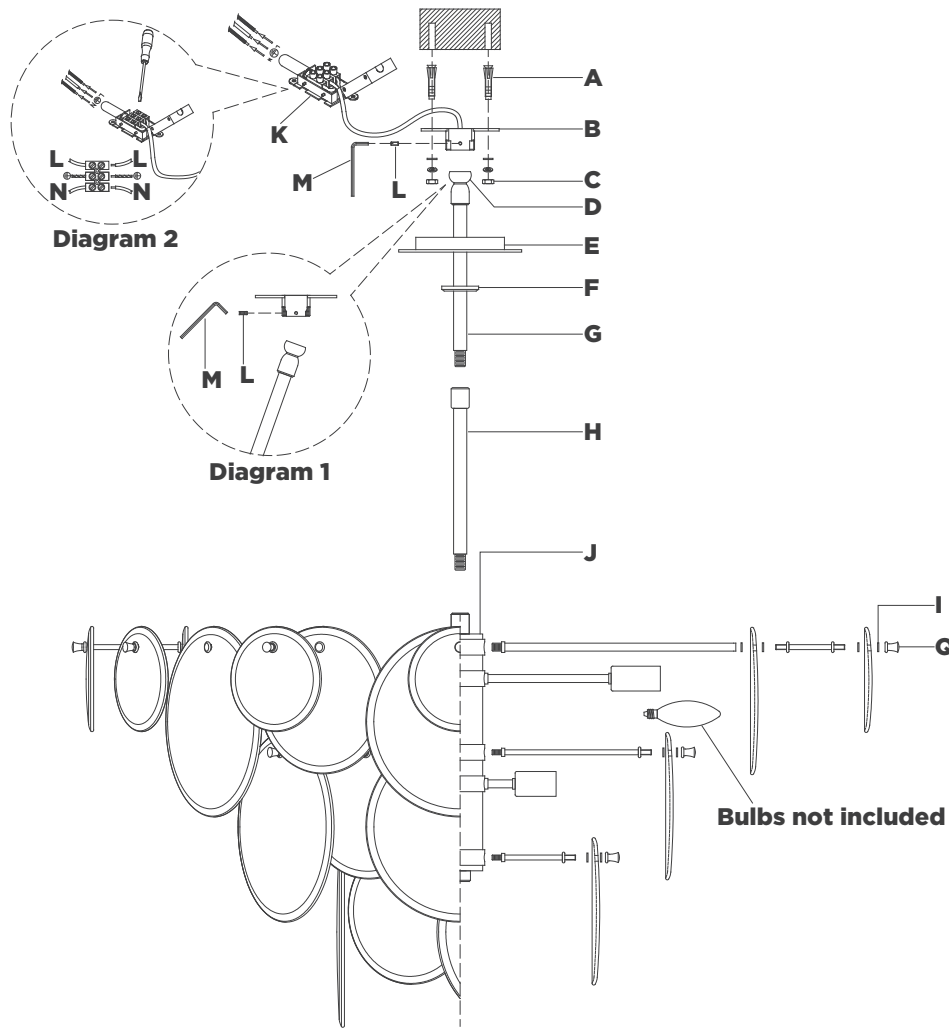

Loire Large Chandelier

Item # ARN5450-EU


NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

9. Hang fixture swivel balls (**D**) to the center of mounting plate (**B**) and secure with set screw (**L**) using provided screwdriver (**M**) (see diagram 1).
 10. Cut excess wires, being sure to leave enough to connect terminal block (**K**).
 11. Remove outer housing of wire by making a neat cut all the way around, about 2.0 cm from the end. Once cut is made, remove and discard the piece of housing, exposing the electrical wires.
- NOTE:** Make sure not to cut too deep into housing or electrical wires could become damaged.
12. Separate wires, and strip insulation on each 6 mm.
 13. Open terminal block (**K**) to prepare for installation of electrical wires. Use diagram 2 to reference electrical installation steps below.
 14. Connect fixture ground (green) and supply ground (usually green or yellow) to terminal block (**K**) and secure with screws.
- NOTE:** It is imperative that the fixture is grounded.
15. Connect neutral wires (blue) to terminal block (**K**) and secure with screws.
 16. Connect hot wires (brown) to terminal block (**K**) and secure with screws. Close terminal block (**K**).

CAUTION: Do not reverse the hot and neutral connections.

ASSEMBLY INSTRUCTIONS

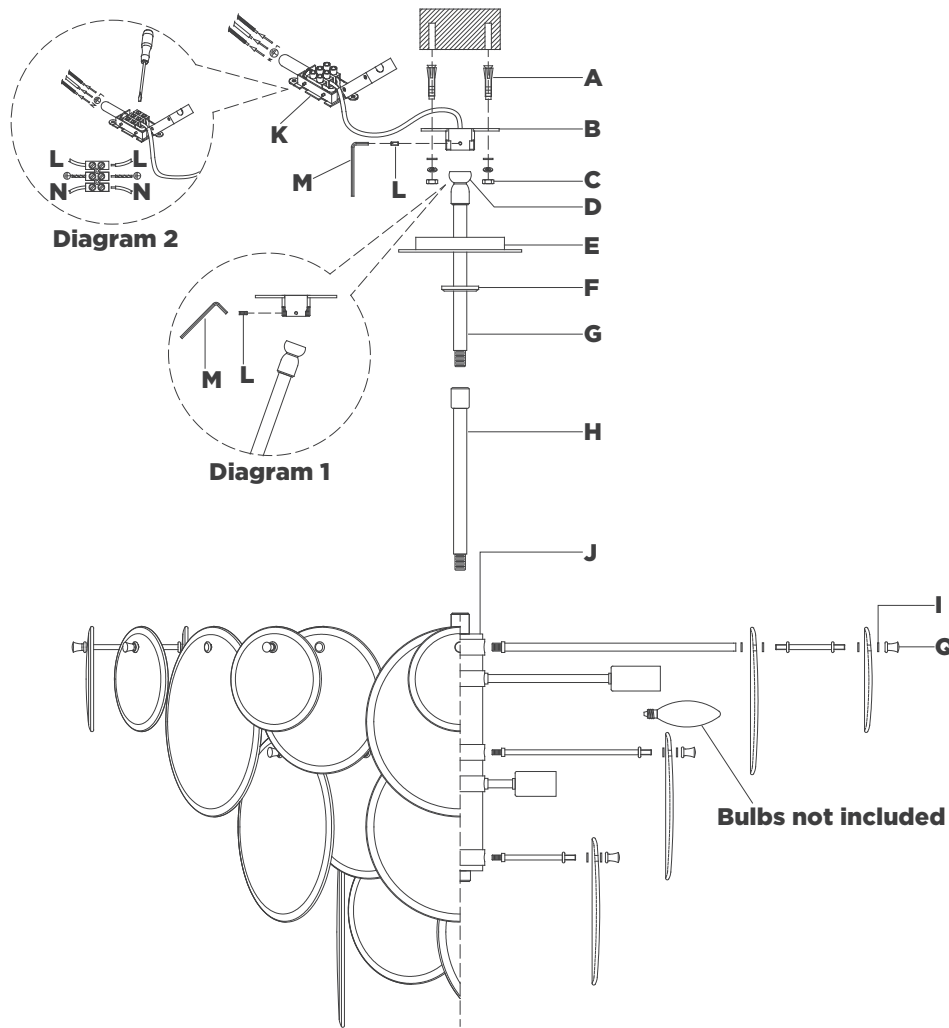

Loire Large Chandelier

Item # ARN5450-EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

17. Install canopy **(E)** to mounting plate **(B)** and secure with collar ring **(F)**.
18. Install light bulbs into the sockets.
19. Install glasses start from the bottom tier as shown below diagram.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

ASSEMBLY INSTRUCTIONS

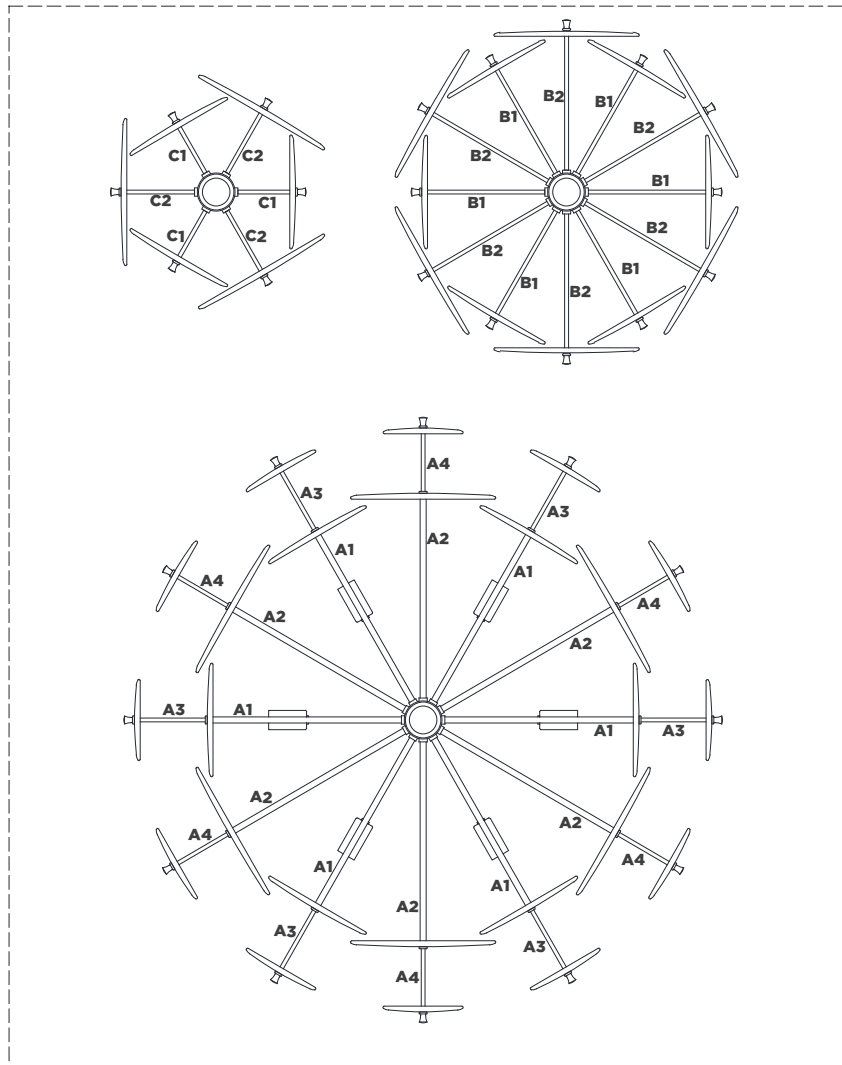


Diagram 3

Loire Large Chandelier

Item # ARN5450-EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

To assemble the metal rods and glass disks:

1. Thread metal rods **(A1)** and **(A2)** to the center hub.
NOTE: Metal rods **(A1)** are located on the top of the first tier sockets (see diagram 3).
2. Thread metal rods **(B1)** and **(B2)** to the center hub.
NOTE: Metal rods **(B1)** are located under metal rods **(A1)** and all metal rods **(B2)** are located under metal rods **(A2)** (see diagram 3).
3. Thread metal rods **(C1)** and **(C2)** to the center hub.
NOTE: Metal rods **(C1 & C2)** are located under metal rods **(B1)** (see diagram 3).
4. Remove finials **(Q)** from metal rods **(C1)**, attach glass disks **(O)** to metal rods **(C1)** and secure with rubber washers **(I)** and finials **(Q)** (see diagram 4).
5. Remove finials **(Q)** from metal rods **(C2)**, attach glass disks **(P)** to metal rods **(C2)** and secure with rubber washers **(I)** and finials **(Q)** (see diagram 4).
6. Remove finials **(Q)** from metal rods **(B1)**, attach glass disks **(O)** to metal rods **(B1)** and secure with rubber washers **(I)** and finials **(Q)** (see diagram 4).
7. Remove finials **(Q)** from metal rods **(B2)**, attach glass disks **(P)** to metal rods **(B2)** and secure with rubber washers **(I)** and finials **(Q)** (see diagram 4).
8. Remove metal rods **(A3)** from metal rods **(A1)**, attach glass disks **(O)** to metal rods **(A1)** and secure with rubber washer **(I)** and metal rods **(A3)** (see diagram 4).

ASSEMBLY INSTRUCTIONS

Loire Large Chandelier

Item # ARN5450-EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

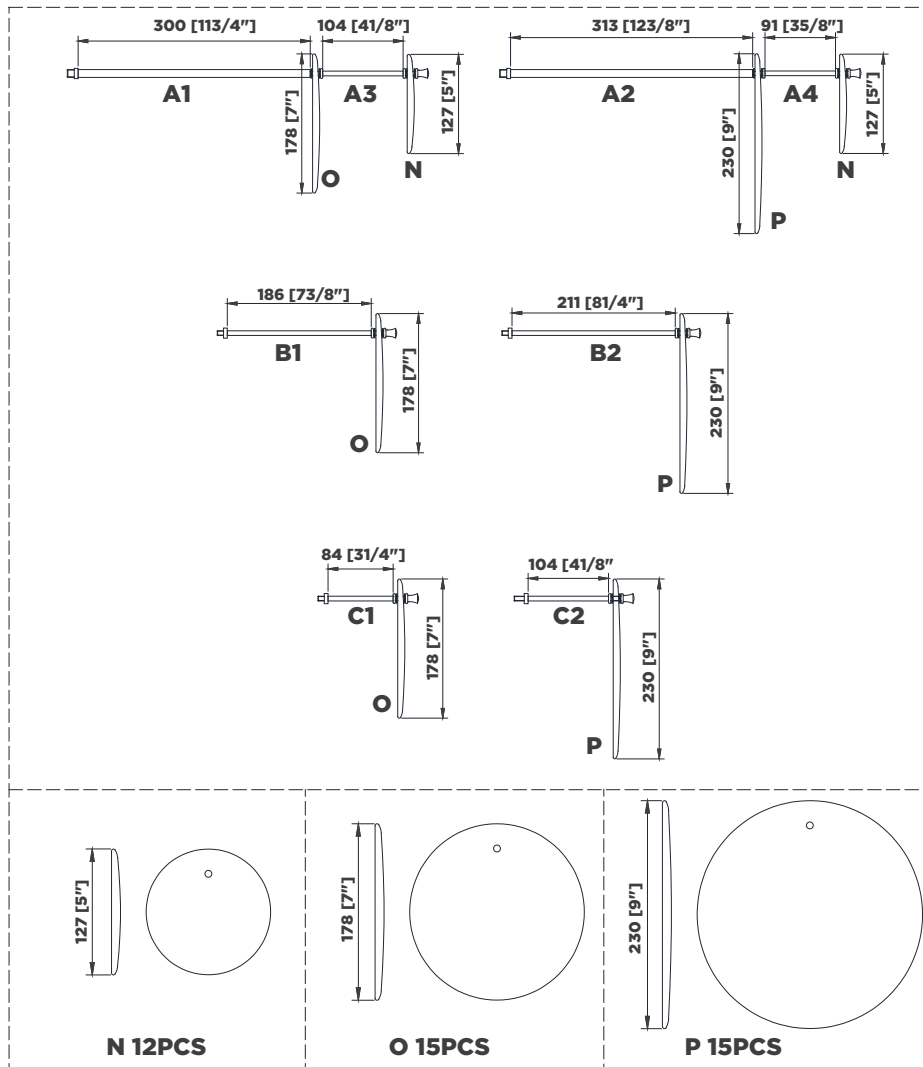


Diagram 4

- Remove finials **(N)** from metal rods **(A3)**, attach glass disks **(N)** to metal rods **(A3)** and secure with rubber washers **(I)** and finials **(Q)** (see diagram 4).
- Remove metal rods **(A4)** from metal rods **(A2)**, attach glass disks **(P)** to metal rods **(A2)** and secure with rubber washer **(I)** and metal rods **(A3)** (see diagram 4).
- Remove finials **(Q)** from metal rods **(A4)**, attach glass disks **(N)** to metal rods **(A3)** and secure with rubber washers **(I)** and finials **(Q)** (see diagram 4).

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.