


ASSEMBLY INSTRUCTIONS

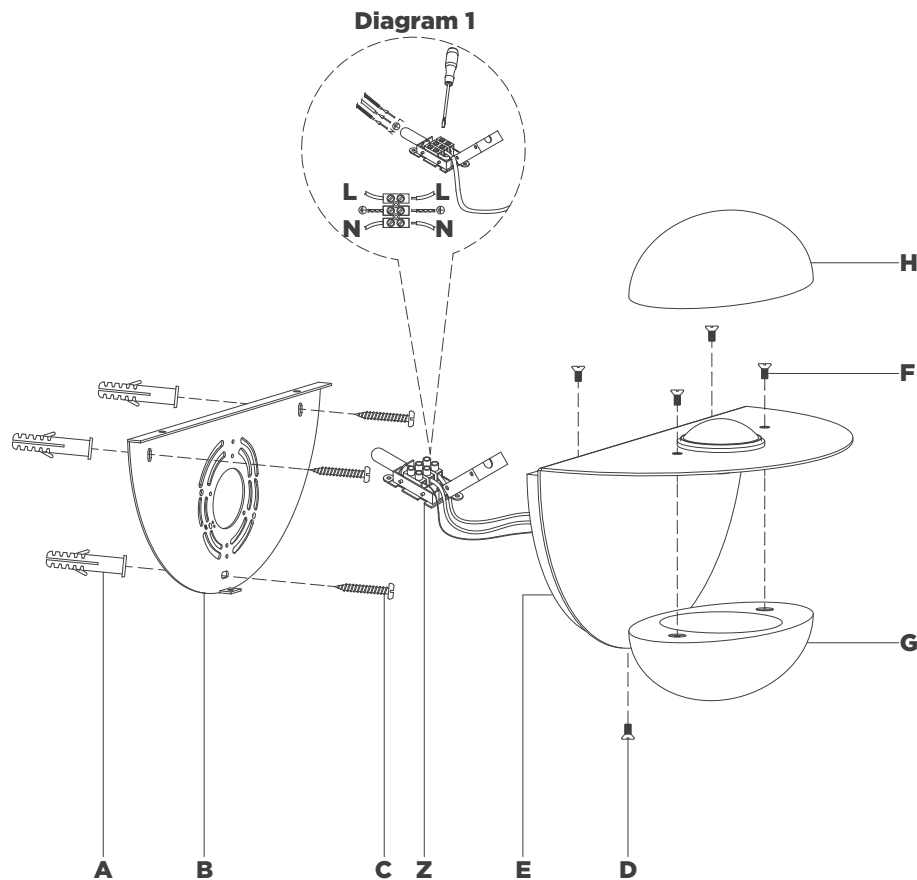

Fosse 9" Invertable Oval Sconce

Item # KW2001-EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Hammer
Pencil	Drill	

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate (B) from fixture (E) by removing screws (D).
3. Using mounting plate (B) as a guide, line up with the wall and mark anchor positions.
4. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors (A) into the holes using a hammer.
5. Install mounting plate (B) to wall and secure with wood screws (C) to anchors (A).
6. Open terminal block (Z) to prepare for installation of electrical wires. Use diagram 1 to reference electrical installation steps below.
7. Connect fixture ground (green) and supply ground (usually green or yellow) to terminal block (Z) and secure with screws.
8. Connect neutral wire (blue) to terminal block (Z) and secure with screws.

NOTE: It is imperative that the fixture is grounded.

ASSEMBLY INSTRUCTIONS

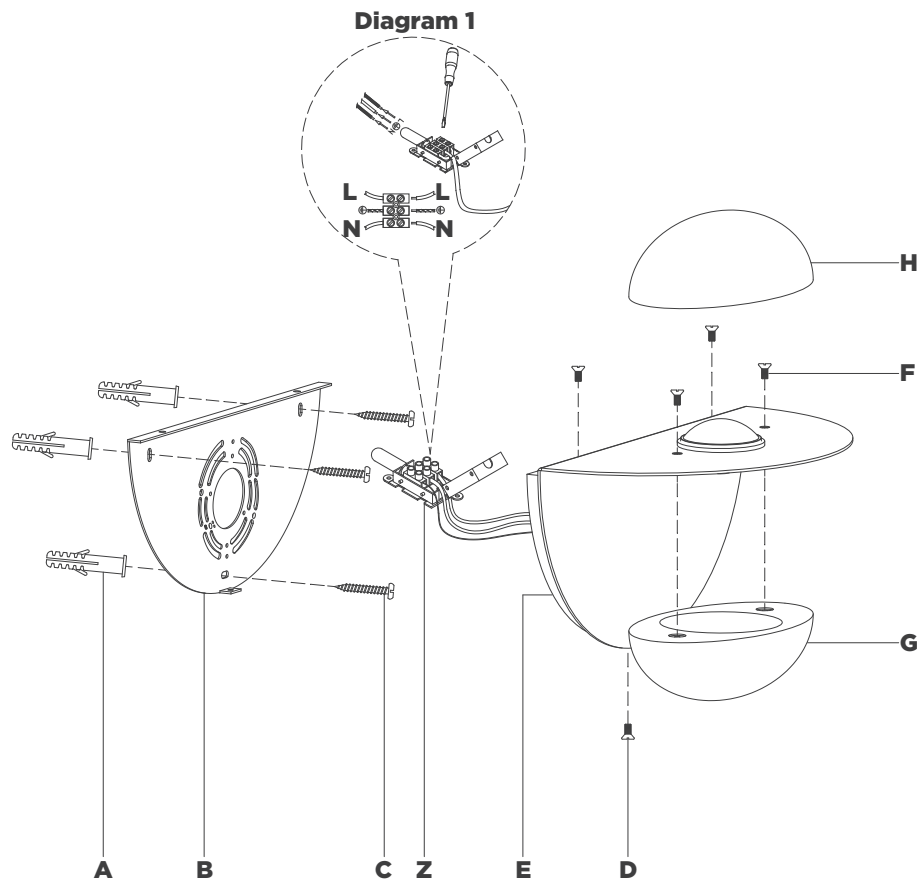

Fosse 9" Invertable Oval Sconce

Item # KW2001-EU

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

9. Connect hot wire (brown) to terminal block (Z) and secure with screws. Close terminal block (Z).

CAUTION: Do not reverse the hot and neutral connections.

10. Install fixture (E) to mounting plate (B) and secure with screws (D).

11. Install shade (G) to fixture (E) and secure with screws (F).

12. Thread shade (H) to fixture (E).

NOTE: Do not overtighten otherwise shade could become damaged.

CAUTION: The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.