



MATCH POINT TRIMLESS

INSTALLATION INSTRUCTIONS | MAY 2023

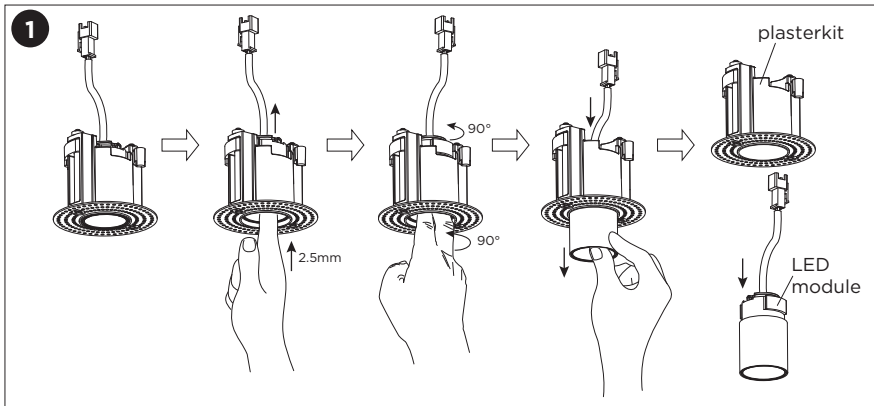


DIMENSIONS

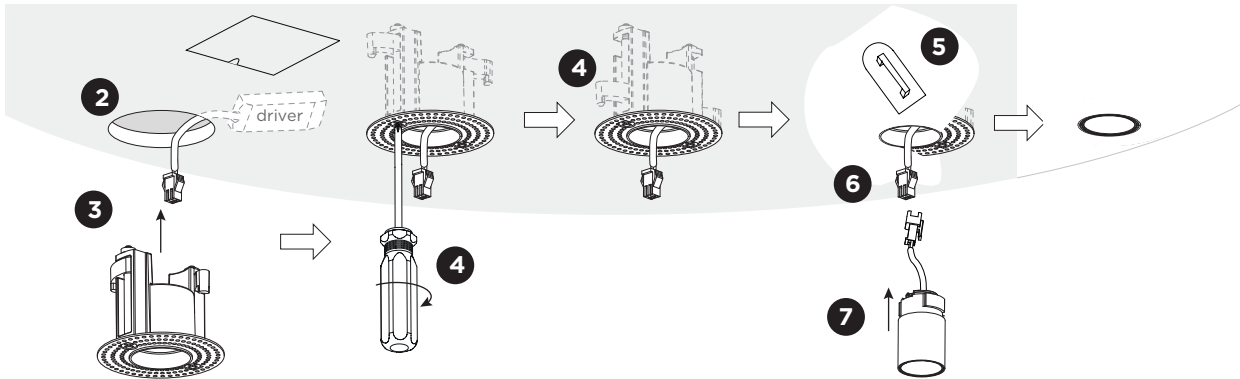


MOUNTING INSTRUCTION

- 1 Remove the LED module from the plasterkit.
- 2 Make a hole in the ceiling according to the prescribed dimensions.
- 3 Insert the plasterkit in the hole.
- 4 Tighten both screws. The plasterkit will clamp itself into the ceiling.
- 5 Plaster and paint the surface.
- 6 **POWER CONNECTION**
Always use a driver according to the specifications of the LED module.

Single connection

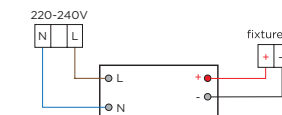


Multiple connection

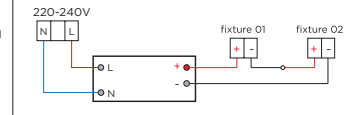


Warning: Driver must be powered off before connecting cables.

Before connecting the luminaire/LED module to the driver please make sure the driver is not powered but disconnected from the mains. The driver can only be powered when the luminaire/LED module is already connected. Disregarding this instruction might damage or even destroy the luminaire/LED module.




After installation the driver is not accessible through the plasterkit. A driver maintenance/revision opening is required.

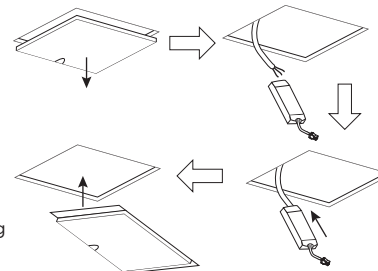

- 7 Click the fixture into the plasterkit hole.

MATCH POINT TRIMLESS


INSTALLATION INSTRUCTIONS | MAY 2023

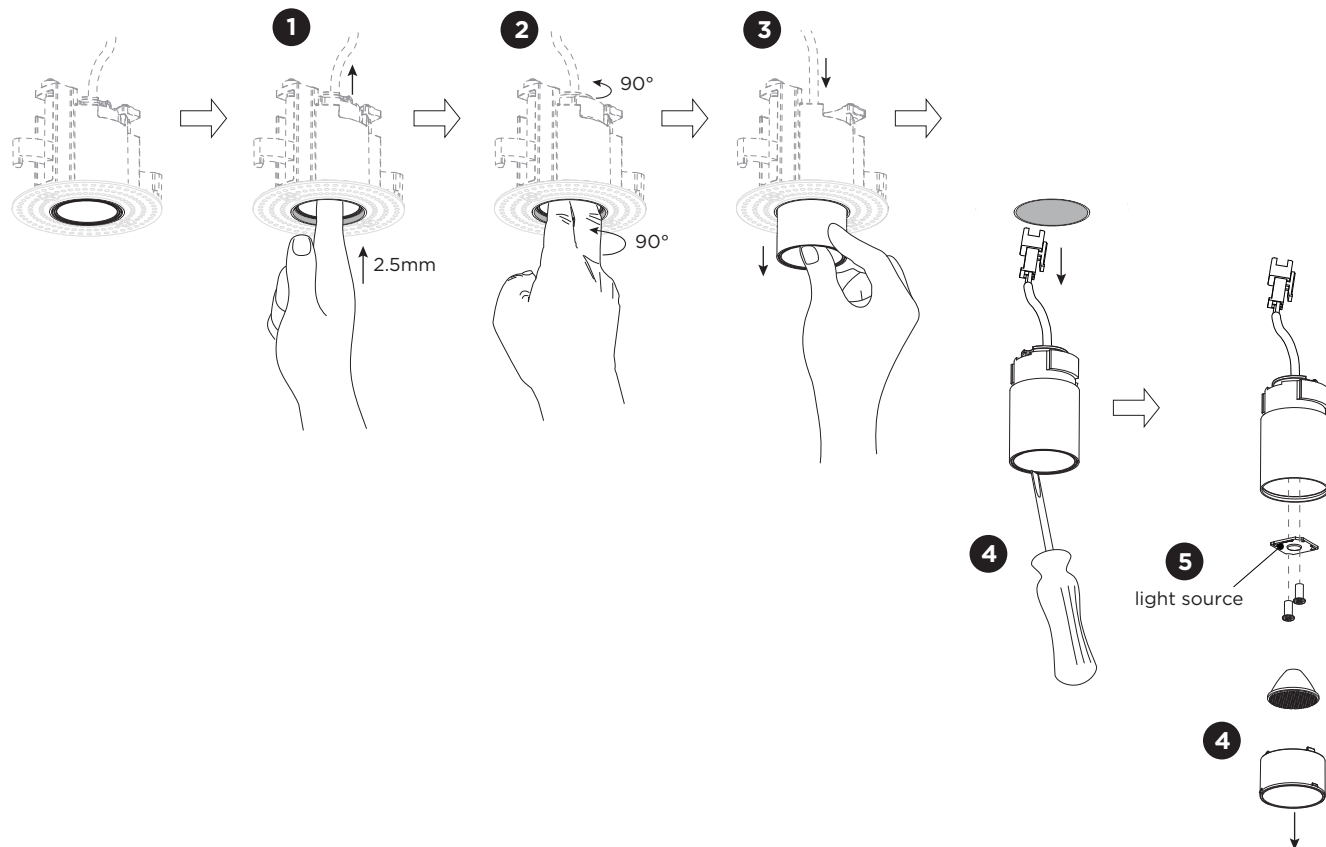

DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source

- 1 Push the light source combination block up a little bit.
- 2 Then rotate it 90° counterclockwise.
- 3 Take out the light source combination block.
- 4 Take out the snout with any convenient tool and remove the lens.
- 5 Remove the screws and take out the light source.



The light source is replaceable by an authorized professional. For advice contact your Wever & Ducré customer service contact point.



This luminaire contains a light source with the energy class E.