


PIRRO ceiling recessed

INSTALLATION INSTRUCTIONS | APRIL 2023

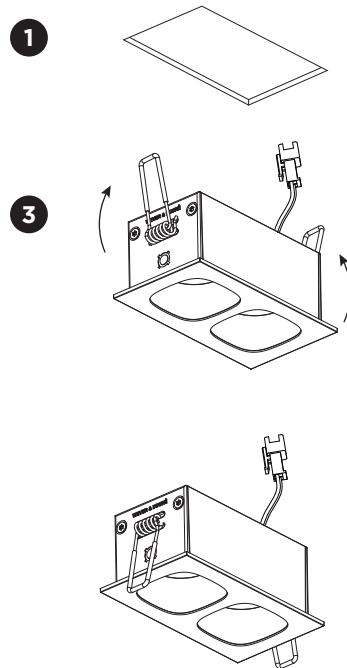

Before connecting the luminaire/LED module to the driver please make sure the driver is not powered but disconnected from the mains. The driver can only be powered when the luminaire/LED module is already connected. Disregarding this instruction might damage or even destroy the luminaire/LED module.

220-240VAC

①

②

DIMENSIONS

1.0 LED		
2.0 LED		
4.0 LED		
6.0 LED		


MOUNTING INSTRUCTION

1 Make a hole in the ceiling according to the prescribed dimensions.


2 POWER CONNECTION

Always use a driver according to the specifications of the LED module.

Single connection



Multiple connection




3 Push the springs upwards and insert the fixture in the ceiling hole.

PB19-010-566-00_V2


PIRRO ceiling recessed

INSTALLATION INSTRUCTIONS | APRIL 2023


1



2



3

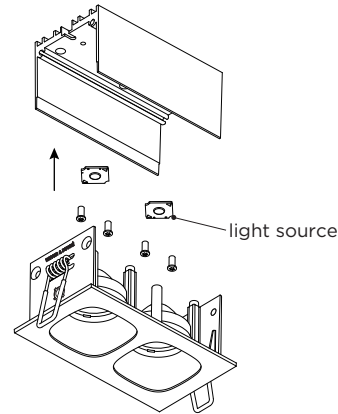

DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source

1


Take the luminaire out of the ceiling hole and unplug the wires.

2

Remove the side screws.

3

Take off the cover and unscrew the light source(s) to remove it/them.



The light source is replaceable by an authorized professional.
For advice contact your Wever & Ducré customer service contact point.



This luminaire contains a light source with the energy class E.



WEVER & DUCRÉ
LIGHTING

WEVER & DUCRÉ BV

Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com