

ROOMOR WALL 4.0

11-Sep-2018

4.0 PAR16

max. 35W | GU10 | 100-240VAC | 50-60Hz
 CE IP20 45°/45° 30°/30°

BODY COLOUR

black texture (Cable Plug with floor switch) 339520B...
 black texture (Cable base round) 339620B...

OPTIONAL


No shade 00
 SHADE 1.0
 black texture B1
 black texture + gold K1
 felt grey (max.15W) F1

SHADE 2.0
 black texture B2
 black texture + gold K2
 felt grey (max.15W) F2


SHADE 3.0
 black texture B3
 black texture + gold K3
 felt grey (max.15W) F3

for PAR16 lamps see our catalogue



SHADE 1.0




SHADE 2.0



SHADE 3.0

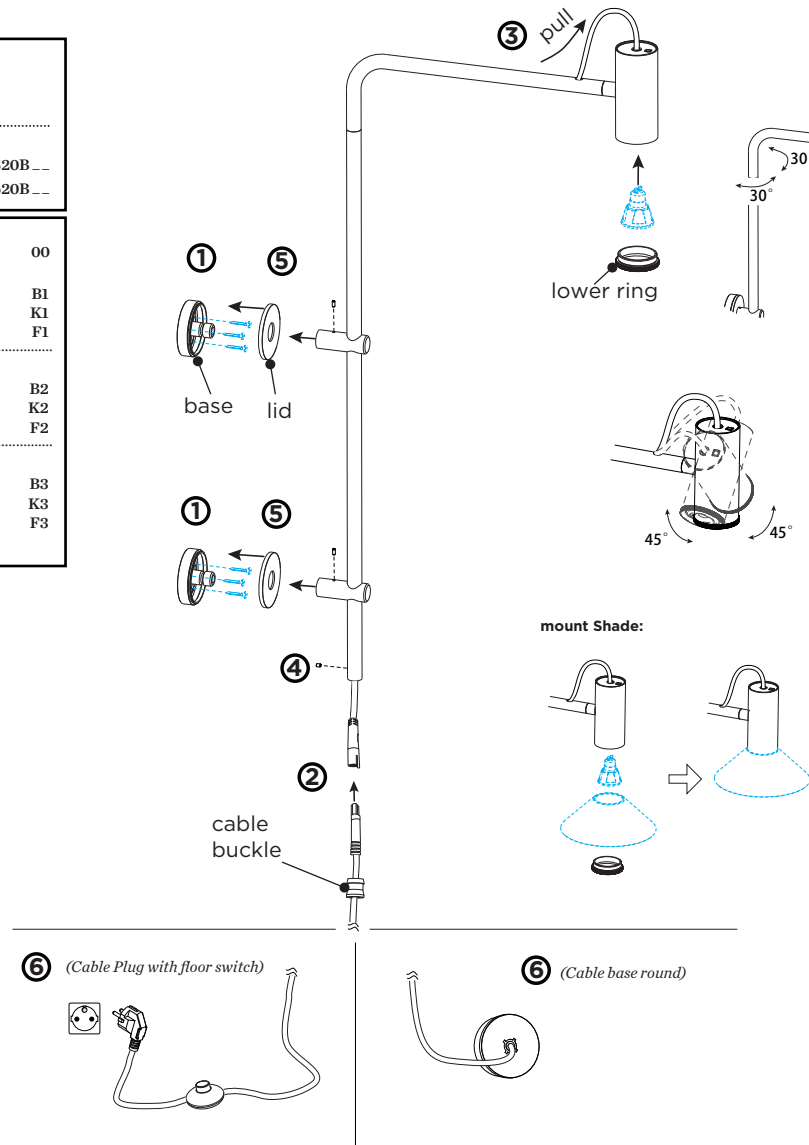

DIMENSIONS



MOUNTING INSTRUCTION

- Open the lid, and mount the base on the wall, and then close the lid by pressing.
- Connect the cable plugs.
- Pull the cable up so that the connected plugs can get into the tube of the luminaire body.
- Put inside by pressing and fix the cable buckle with the allen screw.
- Install the luminaire body on the base and fix it with the allen screw
- for Cable Plug with floor switch:
Power connected with the plug.

for Cable base round:

Mount the round base on the wall

(You have to turn the cover counterclockwise a quarter in order to loosen it from the base and mounting back on is by turning clockwise.)

POWER CONNECTION

Connect the wires
 connection: STANDARD version

