



Arco Led

Designed by Achille and Pier Giacomo Castiglioni, 1962



28W - 1224lm - 2700K

Floor lamp providing direct light. White Carrara marble base. Satin-finish stainless steel telescopic stem. Pressed, polished and zapon-varnished aluminum swiveling and height-adjustable reflector.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607000991		
Mounting	Floor		
Environments	Indoor dry location		
Light source type	LED		
Light sources included	Yes		
LED type	LED array		
Power (W)	28		
System flux (lm)	1224		

Physical

Colour	Steel
Length (mm)	2200
Cord colour	Black
Cord length (mm)	2300
Net weight (kg)	63.85
Package volume (m3)	0.24
IP internal	20



*The diffuser can be adjusted to 1700 mm or 1850 mm.





















Download	
Mounting instructions	↓ PD
Mounting instructions	⊉ PD
Mounting instructions	⊥ PD
Photometric Files	<u>↓</u> LD
Technical Drawings	5
2D	⊥ ZII
3D	⊥ ZII
₿Bim	.↓ . ZII

https://professional.flos.com/en/global/product/arco-led-f0303000/

F0303000

Schematic light drawing



Photometric

Lighting type	Direct	
Light distribution	Asymmetric	
CCT (K)	2700	
Extreme cut off	No	

Electrical

Insulation class	III	
Frequency (Hz)	50/60	
Main voltage (Vac)	100-240	
Power supply	Remote included	
Dimmable	Yes	
Power supply type	Electronic 48V	
Dimming interface	Dimmer Integrated	
Plug type	Type G, Type A, Type C	
Batteries inside	No	

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts

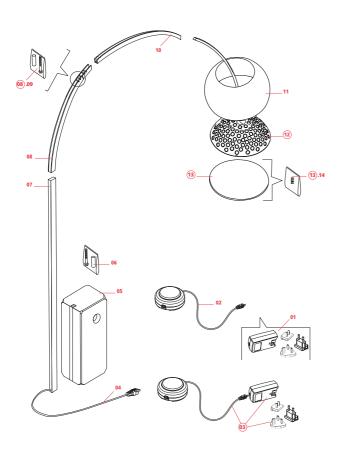

01.	Black plug assembly kit & 48V	RF6600130
	driver	
02.	Switch dimmer 600Ma for new	RF26383
	version	
03.	Switch dimmer 400mA assembly	RF0303600
	for old version	
04.	Middle electric cable with	RF20805
	connectors	
05.	Marble base	F0310000
06.	Fixing screw with joint	RF0300100
07.	lnox stem	RF21041
08.	Long inox channel	RF02970
09.	Pins and screw set	RF0300200
10.	Medium inox channel	RF02971
11.	Polished reflector	RF00797
12.	Small inox channel with grid and	RF0303400
	led	
13.	Optical led diffuser with fixing	RF0303200
	screws	
14.	Optical led diffuser fixing screws	RF0303300









RF6600130

Black plug assembly kit & 48V driver



Switch dimmer 600Ma for new version

RF0303600

Switch dimmer 400mA assembly for old version

RF20805

Middle electric cable with connectors









E0310000

Marble base

RF0300100

Fixing screw with joint

RF21041

Inox stem

RF02970

Long inox channel









RF0300200

Pins and screw set

RF02971

Medium inox channel

RF00797

Polished reflector

RF0303400

Small inox channel with grid and





RF0303200

Optical led diffuser with fixing screws

RF0303300

Optical led diffuser fixing screws