



TRAIN NARROW

INSTALLATION INSTRUCTIONS | DECEMBER 2025


1.0

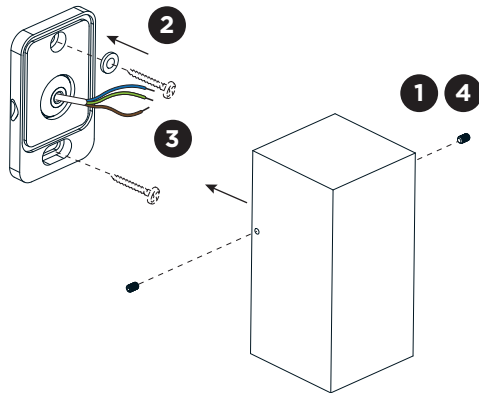

2.0

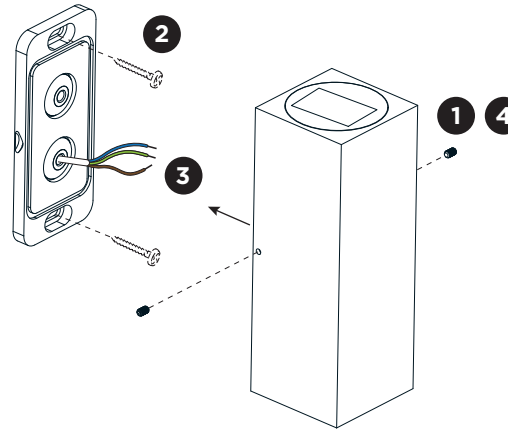


DIMENSIONS

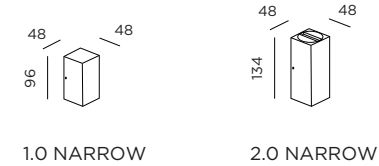


MOUNTING INSTRUCTION

- 1 Remove the mounting base from the luminaire by loosening the socket screws.
- 2 Mount the base on the wall with screws (screws are not included).
Only for 1.0: Add the silicone pad before screwing the base to the wall.
- 3 **POWER CONNECTION**
Connect to 220-240V.



Please use a matching grommet based on the used 220-240V cable and the corresponding type in the overview table.

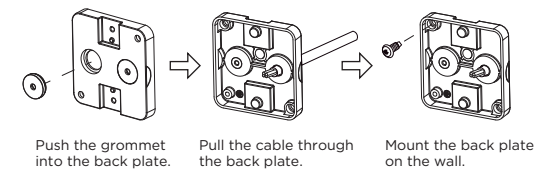


- 4 Fix the luminaire on the base with the socket screws.

Mounting base:

2.0

1.0

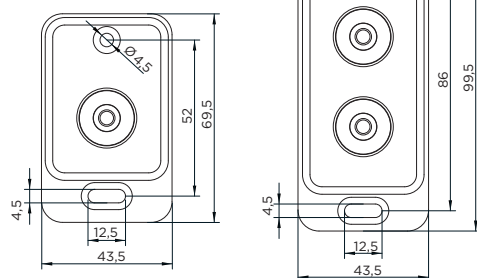

Always use a matching grommet in the overview table.

	A	B	C
CABLE			
TYPE	ROUND H05RN-F H07RN8-F H07RN-F	ROUND H05RN-F	ROUND
OUTSIDE Ø	min 6.8mm max 8.9mm	min 5mm max 6.8mm	min 1.5mm max 2.6mm
CONDUCTION SECTION	2or3x 0.75mm ² 2or3x 1.0mm ² 2or3x 1.5mm ²	2or3x 0.75mm ² 2x 1.0mm ²	0.75mm ² 1.5mm ²



WEVER & DUCRÉ
LIGHTING


WEVER & DUCRÉ BV

Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com


TRAIN NARROW

INSTALLATION INSTRUCTIONS | MAY 2023

1.0

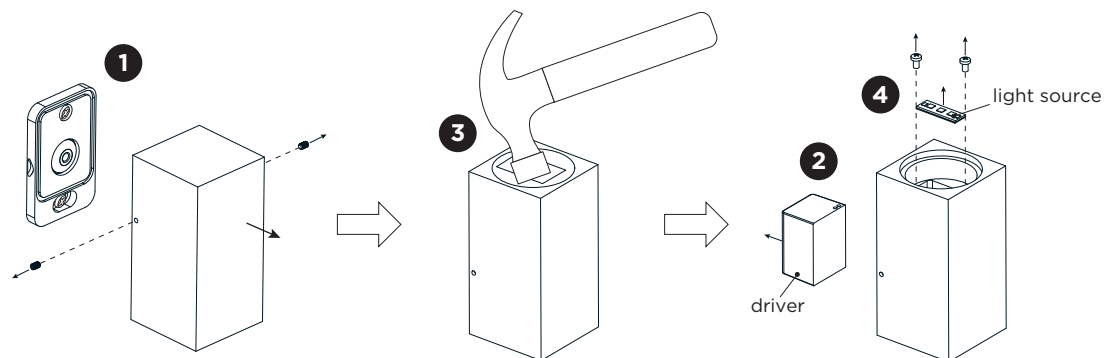


2.0

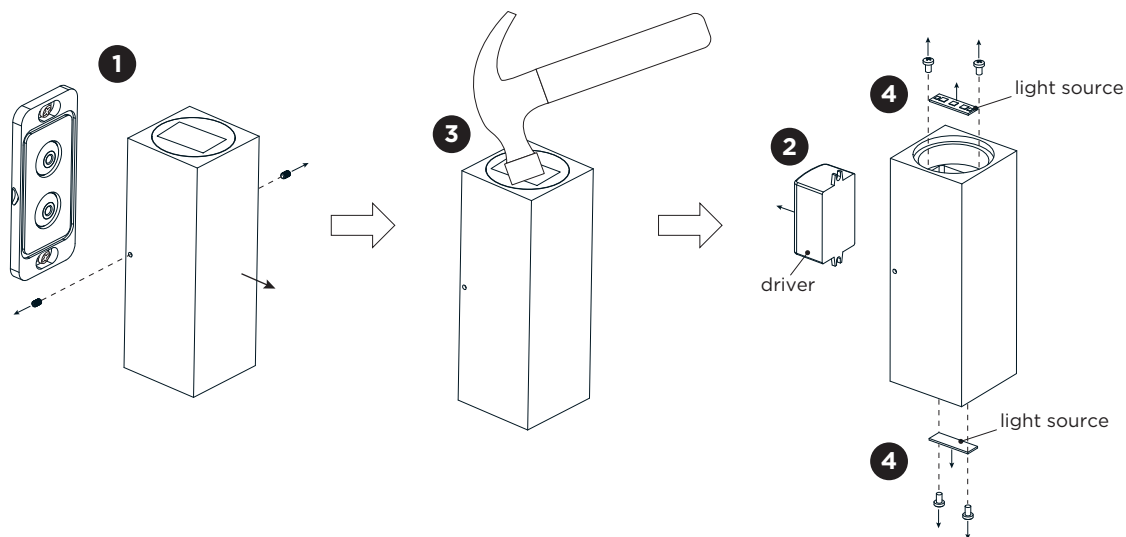

DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source & driver

- 1 Loosen the side screws, disconnect wires and remove the fixture from the mounting base.
- 2 Disconnect the wires and take out the driver.
- 3 Break the glass.
- 4 Remove the screws and take out the light source.



The light source is not replaceable.



The driver can be replaced by the end user.



This luminaire contains a light source with the energy class F.



WEVER & DUCRÉ
LIGHTING

WEVER & DUCRÉ BV

Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com