


Volta

suspension lamp




Configurator.estiluz.com
Customize your creation with our configurator, preview it in a virtual room and augmented reality.



Table of contents

1. Product overview	Page 2
2. Finishes and materials	Page 2
3. Light Source & dimming	Page 2
4. Functionality & Accessories	Page 3
5. Photometric data and technical information	Page 3
6. Installation	Page 4
7. Recommended use & Installation height	Page 4
8. Ordering codes	Page 5
9. Certifications & standards	Page 18
10. Maintenance & Cleaning	Page 18

Versions



3535
Page 5-6



3536
Page 7-8



Linear Clusters
Page 9-15



Round Clusters
Page 16-17

Volta


suspension lamp

1. Product overview

Suspension lamp with a curved metallic body, cylindrical aluminium heads and acrylic (PMMA) lens diffusers. Optional embedded aluminium optic lens with a 20° beam angle. Adjustable height. Possibility to create different compositions. Recessed canopy and remote driver. False ceiling for recessed canopy is required Ø 50mm drill.



2. Finishes and Materials

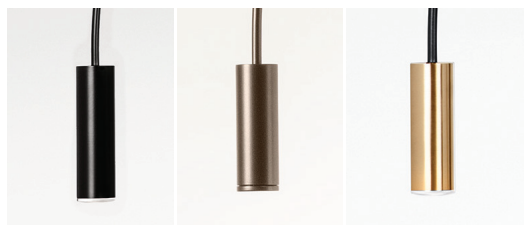

Canopy: 26 Black
74 White
87 Bronze

Body & Head: 26 Black
26 Black & 61 Satin Gold
87 Bronze

PVC extra-thin electrical cable:
Black on all finishes except for white body (white cable).

Extra thin steel tension cables.

3. Light Source & Dimming

Lamping per head

LED 6,2W
(Ang. 85° embedded nylon lens / >90 CRI / 350mA)
100V - 240V

2700K / Typ* 725 lumens
3000K / Typ* 763 lumens

*Integrated LED module (included)

*Alternative 60°exposed acrylic lens (included)

Dimming options:

Standard: TRIAC
Optional: DALI, CASAMBI

Optional optic: embedded aluminium optic 20°

Volta

suspension lamp


4. Functionality & Accessories

Standard configuration includes a 85° recessed nylon optic designed to improve visual comfort and reduce glare. It provides soft, uniform illumination with minimal visual impact.

A 60° methacrylate optic is supplied in the box, allowing the user to choose the preferred lighting effect. This option creates a subtle, decorative line of light visible from the side.

Optional architectural optic conceals the LED source within a 20° conical aluminium lens. It projects light exclusively downward (no lateral emission), offering precise control.

Three possible optic lenses

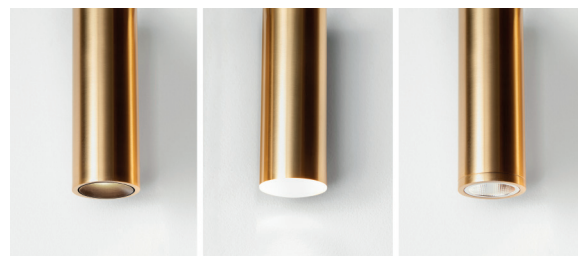

Nylon optic
85° beam angle
*included & installed

Methacrylate optic
60° beam angle
*included, not installed


Aluminium optic
20° beam angle
*not included, accessory

5. Photometric Data and Technical Information

Photometric data corresponds to each individual lamp. 2D, 3D, and BIM files also available in the download area. Access to all technical files directly here.


Nylon optic 85°

H[m]	D[m]	Max lux	Med lux	Alpha=42.5°+42.5°	G=0.0 Max no a G
1.00	1.84	302	128		
2.00	3.67	75	32		
3.00	5.51	34	14		
4.00	7.34	19	8		
5.00	9.18	12	5		




Methacrylate optic 60°

H[m]	D[m]	Max lux	Med lux	Alpha=28.8°+28.8°	G=0.0
1.00	1.10	430	230		
2.00	2.20	108	57		
3.00	3.30	48	26		
4.00	4.41	27	14		
5.00	5.51	17	9		



Aluminium optic 20°

H[m]	D[m]	Max lux	Med lux	Alpha=10.1°+10.1°	G=0.0
1.00	0.36	2047	1259		
2.00	0.71	512	315		
3.00	1.07	227	140		
4.00	1.43	128	79		
5.00	1.79	82	50		



Volta

suspension lamp

6. Installation

Single canopy

Surface



Recessed with remote driver



Ø 50 mm drill in
dropped ceiling

Clusters

Linear




Round





7. Recommended use & Installation height

Suitable for general lighting, as well as for direct illumination above dining tables, countertops, bars, or desks. We **recommend positioning** the light source approximately **85 cm above the surface**. For more accurate information, refer to the photometric report.

Standard Acrylic Lens

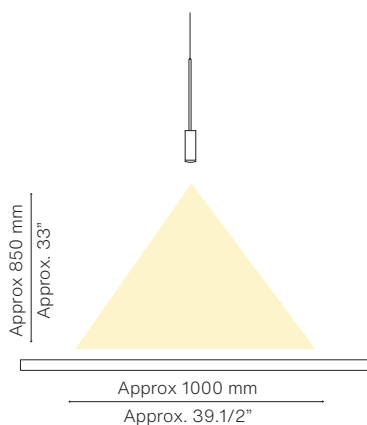


Embedded Aluminium Lens

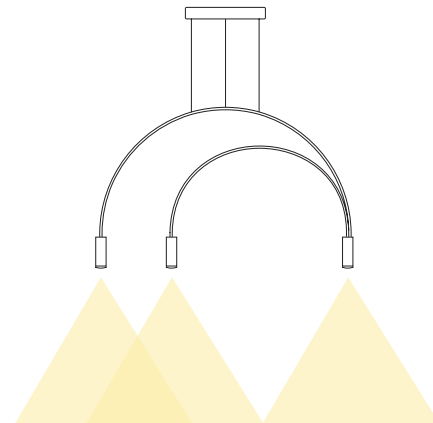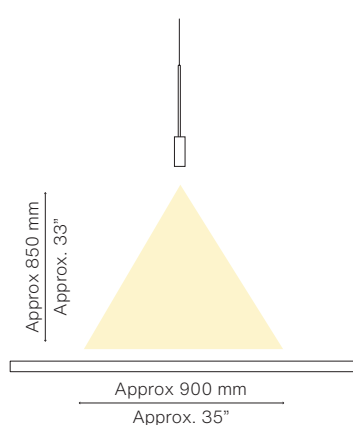

Volta

suspension lamp



Configurator.estiluz.com
Customize your creation with our configurator, preview it in a virtual room and augmented reality.

8. Ordering Codes

Lamping 3535S

LED 2x6,2W (Ang. 85° embedded nylon lens
>90 CRI / 350mA) 230V
2700K / Typ* 2x725 lumens
3000K / Typ* 2x763 lumens
*Integrated LED module (included)
*Alternative 60°exposed acrylic lens (included)

DIM: TRIAC (Optional: DALI, CASAMBI)

Optional optic: embedded aluminium optic 20°

Canopy: Single Surface. Driver in the canopy

Finishes

Canopy:

26 Black

74 White


87 Bronze

Body & Head:

26 Black

26 Black & 61 Satin Gold

87 Bronze

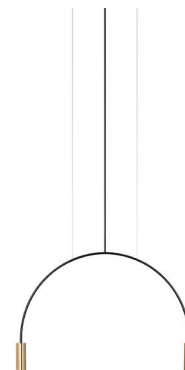

Drawing	Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
VOL_3535S 	Black	Black / Black	VOL_3535S_262626W	VOL_3535S_262626M
	White	Black / Black	VOL_3535S_742626W	VOL_3535S_742626M
	Black	Black / Satin Gold	VOL_3535S_262661W	VOL_3535S_262661M
	White	Black / Satin Gold	VOL_3535S_742661W	VOL_3535S_742661M
	Bronze	Bronze / Bronze	VOL_3535S_878787W	VOL_3535S_878787M


Lens Ordering Codes:

One 20° embedded lens per head

Black	2 units of 123530263
Satin Gold	2 units of 123530613
Bronze	2 units of 123530873

Volta

suspension lamp



Configurator.estiluz.com
Customize your creation with our configurator, preview it in a virtual room and augmented reality.

8. Ordering Codes

Lamping 3535R

LED 2x6,2W (Ang. 85° embedded nylon lens
>90 CRI / 350mA) 230V
2700K / Typ* 2x725 lumens
3000K / Typ* 2x763 lumens
*Integrated LED module (included)
*Alternative 60°exposed acrylic lens (included)

DIM: TRIAC (Optional: DALI, CASAMBI)

Optional optic: embedded aluminium optic 20°

Canopy: Single Recessed
Remote driver. Ø 50mm drill

Finishes

Canopy:

26 Black

74 White


87 Bronze

Body & Head:

26 Black

26 Black & 61 Satin Gold

87 Bronze

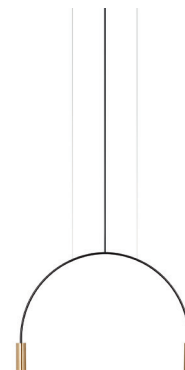

Drawing	Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
VOL_3535R 	Black	Black / Black	VOL_3535R_262626W	VOL_3535R_262626M
	White	Black / Black	VOL_3535R_742626W	VOL_3535R_742626M
	Black	Black / Satin Gold	VOL_3535R_262661W	VOL_3535R_262661M
	White	Black / Satin Gold	VOL_3535R_742661W	VOL_3535R_742661M
	Black	Bronze / Bronze	VOL_3535R_268787W	VOL_3535R_268787M
	White	Bronze / Bronze	VOL_3535R_748787W	VOL_3535R_748787M

Lens Ordering Codes:

One 20° embedded lens per head

Black	2 units of 123530263
Satin Gold	2 units of 123530613
Bronze	2 units of 123530873

Volta

suspension lamp



Configurator.estiluz.com
Customize your creation with our configurator, preview it in a virtual room and augmented reality.

8. Ordering Codes

Lamping 3536S

LED 3x6,2W (Ang. 85° embedded nylon lens
>90 CRI / 350mA) 230V
2700K / Typ* 3x725 lumens
3000K / Typ* 3x763 lumens
*Integrated LED module (included)
*Alternative 60°exposed acrylic lens (included)

DIM: TRIAC (Optional: DALI, CASAMBI)

Optional optic: embedded aluminium optic 20°

Canopy: Single Surface. Driver in the canopy

Finishes

Canopy:

26 Black

74 White


87 Bronze

Body & Head:

26 Black

26 Black & 61 Satin Gold

87 Bronze

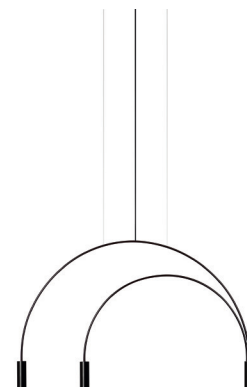


Drawing	Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
VOL_3536S 	Black	Black / Black	VOL_3536S_262626W	VOL_3536S_262626M
	White	Black / Black	VOL_3536S_742626W	VOL_3536S_742626M
	Black	Black / Satin Gold	VOL_3536S_262661W	VOL_3536S_262661M
	White	Black / Satin Gold	VOL_3536S_742661W	VOL_3536S_742661M
	Bronze	Bronze / Bronze	VOL_3536S_878787W	VOL_3536S_878787M

Lens Ordering Codes:

One 20° embedded lens per head

Black	3 units of 123530263
Satin Gold	3 units of 123530613
Bronze	3 units of 123530873



8. Ordering Codes

Lamping 3536R

LED 3x6,2W (Ang. 85° embedded nylon lens
>90 CRI / 350mA) 230V
2700K / Typ* 3x725 lumens
3000K / Typ* 3x763 lumens
*Integrated LED module (included)
*Alternative 60°exposed acrylic lens (included)

DIM: TRIAC (Optional: DALI, CASAMBI)

Optional optic: embedded aluminium optic 20°

Canopy: Single Recessed
Remote driver. Ø 50mm drill

Finishes

Canopy:

26 Black

74 White


87 Bronze

Body & Head:

26 Black

26 Black & 61 Satin Gold

87 Bronze

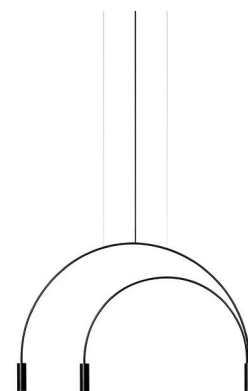

Drawing	Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
VOL_3536R 	Black	Black / Black	VOL_3536R_262626W	VOL_3536R_262626M
	White	Black / Black	VOL_3536R_742626W	VOL_3536R_742626M
	Black	Black / Satin Gold	VOL_3536R_262661W	VOL_3536R_262661M
	White	Black / Satin Gold	VOL_3536R_742661W	VOL_3536R_742661M
	Black	Bronze / Bronze	VOL_3536R_268787W	VOL_3536R_268787M
	White	Bronze / Bronze	VOL_3536R_748787W	VOL_3536R_748787M

Lens Ordering Codes:

One 20° embedded lens per head

Black	3 units of 123530263
Satin Gold	3 units of 123530613
Bronze	3 units of 123530873

Volta

suspension lamp



Configurator.estiluz.com
Customize your creation with our configurator, preview it in a virtual room and augmented reality.

8. Ordering Codes

Lamping L73S2D

LED 4x6,2W (Ang. 85° embedded nylon lens
>90 CRI / 350mA) 230V
2700K / Typ* 4x725 lumens
3000K / Typ* 4x763 lumens
*Integrated LED module (included)
*Alternative 60°exposed acrylic lens (included)

DIM: TRIAC (Optional: DALI, CASAMBI)

Optional optic: embedded aluminium optic 20°

Canopy: Multiple Linear Surface
Driver in the canopy

Finishes

Canopy:

26 Black

74 White


87 Bronze

Body & Head:

26 Black

26 Black & 61 Satin Gold


87 Bronze

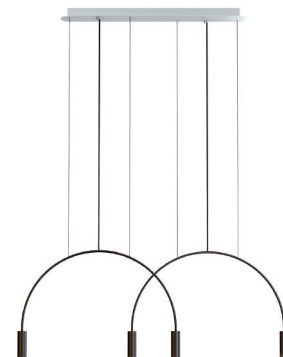

Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
Black	Black / Black	VOL_L73S2D_262626W	VOL_L73S2D_262626M
White	Black / Black	VOL_L73S2D_742626W	VOL_L73S2D_742626M
Black	Black / Satin Gold	VOL_L73S2D_262661W	VOL_L73S2D_262661M
White	Black / Satin Gold	VOL_L73S2D_742661W	VOL_L73S2D_742661M
White	Bronze / Bronze	VOL_L73S2D_748787W	VOL_L73S2D_748787M
Bronze	Bronze / Bronze	VOL_L73S2D_878787W	VOL_L73S2D_878787M

Drawing

VOL_L73S2D

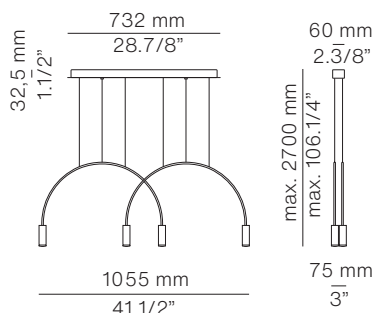

Lens Ordering Codes:

One 20° embedded lens per head

Black	4 units of 123530263
Satin Gold	4 units of 123530613
Bronze	4 units of 123530873

Volta

suspension lamp



Configurator.estiluz.com
Customize your creation with our configurator, preview it in a virtual room and augmented reality.

8. Ordering Codes

Lamping L78S1D1T

LED 5x6,2W (Ang. 85° embedded nylon lens
>90 CRI / 350mA) 230V
2700K / Typ* 5x725 lumens
3000K / Typ* 5x763 lumens
*Integrated LED module (included)
*Alternative 60°exposed acrylic lens (included)

DIM: TRIAC (Optional: DALI, CASAMBI)

Optional optic: embedded aluminium optic 20°

Canopy: Multiple Linear Surface
Driver in the canopy

Finishes

Canopy:

26 Black

74 White


87 Bronze

Body & Head:

26 Black

26 Black & 61 Satin Gold


87 Bronze



Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
Black	Black / Black	VOL_L78S1D1T_262626W	VOL_L78S1D1T_262626M
White	Black / Black	VOL_L78S1D1T_742626W	VOL_L78S1D1T_742626M
Black	Black / Satin Gold	VOL_L78S1D1T_262661W	VOL_L78S1D1T_262661M
White	Black / Satin Gold	VOL_L78S1D1T_742661W	VOL_L78S1D1T_742661M
White	Bronze / Bronze	VOL_L78S1D1T_748787W	VOL_L78S1D1T_748787M
Bronze	Bronze / Bronze	VOL_L78S1D1T_878787W	VOL_L78S1D1T_878787M

Drawing

VOL_L78S1D1T

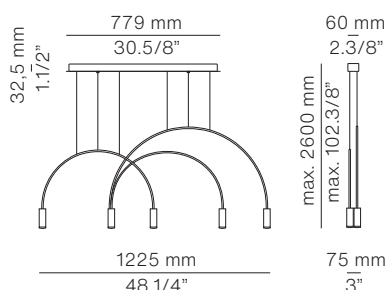


Lens Ordering Codes:

One 20° embedded lens per head

Black	5 units of 123530263
Satin Gold	5 units of 123530613
Bronze	5 units of 123530873

Volta

suspension lamp



Configurator.estiluz.com
Customize your creation with our configurator, preview it in a virtual room and augmented reality.

8. Ordering Codes

Lamping L92S2T

LED 6x6,2W (Ang. 85° embedded nylon lens
>90 CRI / 350mA) 230V
2700K / Typ* 6x725 lumens
3000K / Typ* 6x763 lumens
*Integrated LED module (included)
*Alternative 60°exposed acrylic lens (included)

DIM: TRIAC (Optional: DALI, CASAMBI)

Optional optic: embedded aluminium optic 20°

Canopy: Multiple Linear Surface
Driver in the canopy

Finishes

Canopy:
26 Black
74 White
87 Bronze


Body & Head:
26 Black
26 Black & 61 Satin Gold
87 Bronze



Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
Black	Black / Black	VOL_L92S2T_262626W	VOL_L92S2T_262626M
White	Black / Black	VOL_L92S2T_742626W	VOL_L92S2T_742626M
Black	Black / Satin Gold	VOL_L92S2T_262661W	VOL_L92S2T_262661M
White	Black / Satin Gold	VOL_L92S2T_742661W	VOL_L92S2T_742661M
White	Bronze / Bronze	VOL_L92S2T_268787W	VOL_L92S2T_268787M
Bronze	Bronze / Bronze	VOL_L92S2T_878787W	VOL_L92S2T_878787M

Drawing

VOL_L92S2T

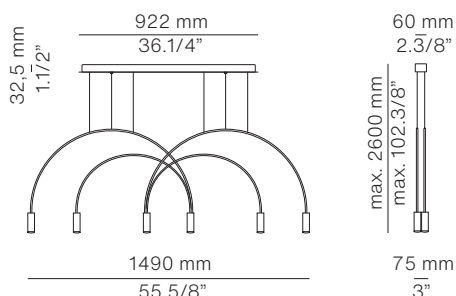

Lens Ordering Codes:

One 20° embedded lens per head

Black	6 units of 123530263
Satin Gold	6 units of 123530613
Bronze	6 units of 123530873



8. Ordering Codes

Lamping L165S3D

LED 6x6,2W (Ang. 85° embedded nylon lens
>90 CRI / 350mA) 230V
2700K / Typ* 6x725 lumens
3000K / Typ* 6x763 lumens
*Integrated LED module (included)
*Alternative 60°exposed acrylic lens (included)

DIM: TRIAC (Optional: DALI, CASAMBI)

Optional optic: embedded aluminium optic 20°

Canopy: Multiple Linear Surface
Driver in the canopy

Finishes

Canopy:
26 Black
74 White
87 Bronze


Body & Head:
26 Black
26 Black & 61 Satin Gold
87 Bronze



Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
Black	Black / Black	VOL_L165S3D_262626W	VOL_L165S3D_262626M
White	Black / Black	VOL_L165S3D_742626W	VOL_L165S3D_742626M
Black	Black / Satin Gold	VOL_L165S3D_262661W	VOL_L165S3D_262661M
White	Black / Satin Gold	VOL_L165S3D_742661W	VOL_L165S3D_742661M
White	Bronze / Bronze	VOL_L165S3D_748787W	VOL_L165S3D_748787M
Bronze	Bronze / Bronze	VOL_L165S3D_878787W	VOL_L165S3D_878787M

Drawing


VOL_L165S3D

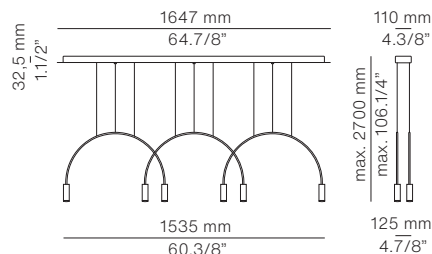

Lens Ordering Codes:

One 20° embedded lens per head

Black	6 units of 123530263
Satin Gold	6 units of 123530613
Bronze	6 units of 123530873



8. Ordering Codes

Lamping L165S1T1D1T

LED 8x6,2W (Ang. 85° embedded nylon lens
>90 CRI / 350mA) 230V
2700K / Typ* 8x725 lumens
3000K / Typ* 8x763 lumens
*Integrated LED module (included)
*Alternative 60°exposed acrylic lens (included)

DIM: TRIAC (Optional: DALI, CASAMBI)

Optional optic: embedded aluminium optic 20°

Canopy: Multiple Linear Surface
Driver in the canopy

Finishes

Canopy:
26 Black
74 White
87 Bronze


Body & Head:
26 Black
26 Black & 61 Satin Gold
87 Bronze



Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
Black	Black / Black	VOL_L165S1T1D1T_262626W	VOL_L165S1T1D1T_262626M
White	Black / Black	VOL_L165S1T1D1T_742626W	VOL_L165S1T1D1T_742626M
Black	Black / Satin Gold	VOL_L165S1T1D1T_262661W	VOL_L165S1T1D1T_262661M
White	Black / Satin Gold	VOL_L165S1T1D1T_742661W	VOL_L165S1T1D1T_742661M
White	Bronze / Bronze	VOL_L165S1T1D1T_748787W	VOL_L165S1T1D1T_748787M
Bronze	Bronze / Bronze	VOL_L165S1T1D1T_878787W	VOL_L165S1T1D1T_878787M

Drawing


VOL_L165S1T1D1T

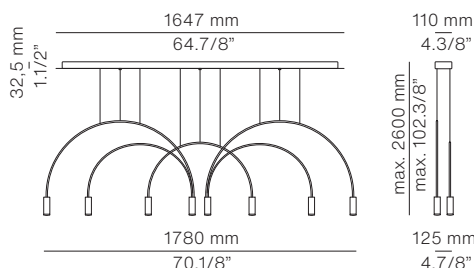

Lens Ordering Codes:

One 20° embedded lens per head

Black	8 units of 123530263
Satin Gold	8 units of 123530613
Bronze	8 units of 123530873



8. Ordering Codes

Lamping L165S1D2T

LED 8x6,2W (Ang. 85° embedded nylon lens
>90 CRI / 350mA) 230V
2700K / Typ* 8x725 lumens
3000K / Typ* 8x763 lumens
*Integrated LED module (included)
*Alternative 60°exposed acrylic lens (included)

DIM: TRIAC (Optional: DALI, CASAMBI)

Optional optic: embedded aluminium optic 20°

Canopy: Multiple Linear Surface
Driver in the canopy

Finishes

Canopy:
26 Black
74 White
87 Bronze


Body & Head:
26 Black
26 Black & 61 Satin Gold
87 Bronze



Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
Black	Black / Black	VOL_L165S1D2T_262626W	VOL_L165S1D2T_262626M
White	Black / Black	VOL_L165S1D2T_742626W	VOL_L165S1D2T_742626M
Black	Black / Satin Gold	VOL_L165S1D2T_262661W	VOL_L165S1D2T_262661M
White	Black / Satin Gold	VOL_L165S1D2T_742661W	VOL_L165S1D2T_742661M
White	Bronze / Bronze	VOL_L165S1D2T_748787W	VOL_L165S1D2T_748787M
Bronze	Bronze / Bronze	VOL_L165S1D2T_878787W	VOL_L165S1D2T_878787M

Drawing

VOL_L165S1D2T

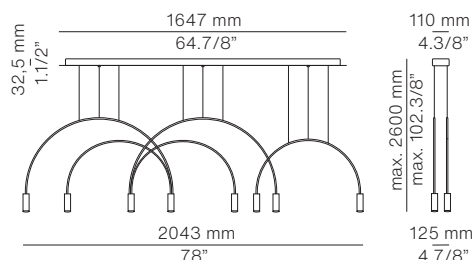

Lens Ordering Codes:

One 20° embedded lens per head

Black	8 units of 123530263
Satin Gold	8 units of 123530613
Bronze	8 units of 123530873



8. Ordering Codes

Lamping L165S3D2T

LED 12x6,2W (Ang. 85° embedded nylon lens

>90 CRI / 350mA) 230V

2700K / Typ* 12x725 lumens

3000K / Typ* 12x763 lumens

*Integrated LED module (included)

*Alternative 60°exposed acrylic lens (included)

DIM: TRIAC (Optional: DALI, CASAMBI)

Optional optic: embedded aluminium optic 20°.

Canopy: Multiple Linear Surface

Driver in the canopy

Finishes

Canopy:

26 Black

74 White

87 Bronze

Body & Head:

26 Black

26 Black & 61 Satin Gold


87 Bronze



Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
Black	Black / Black	VOL_L165S3D2T_262626W	VOL_L165S3D2T_262626M
White	Black / Black	VOL_L165S3D2T_742626W	VOL_L165S3D2T_742626M
Black	Black / Satin Gold	VOL_L165S3D2T_262661W	VOL_L165S3D2T_262661M
White	Black / Satin Gold	VOL_L165S3D2T_742661W	VOL_L165S3D2T_742661M
White	Bronze / Bronze	VOL_L165S3D2T_748787W	VOL_L165S3D2T_748787M
Bronze	Bronze / Bronze	VOL_L165S3D2T_878787W	VOL_L165S3D2T_878787M

Drawing

VOL_L165S3D2T

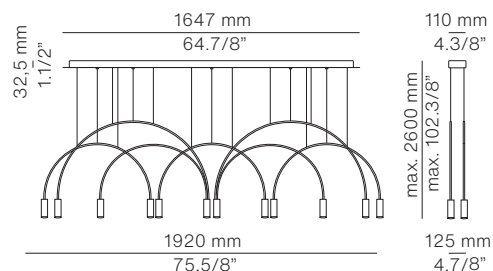


Lens Ordering Codes:

One 20° embedded lens per head

Black	12 units of 123530263
Satin Gold	12 units of 123530613
Bronze	12 units of 123530873

Volta

suspension lamp



Configurator.estiluz.com
Customize your creation with our configurator, preview it in a virtual room and augmented reality.

8. Ordering Codes

Lamping R70S3D

LED 6x6,2W (Ang. 85° embedded nylon lens
>90 CRI / 350mA) 230V
2700K / Typ* 6x725 lumens
3000K / Typ* 6x763 lumens
*Integrated LED module (included)
*Alternative 60°exposed acrylic lens (included)

DIM: TRIAC (Optional: DALI, CASAMBI)

Optional optic: embedded aluminium optic 20°

Canopy: Multiple Round Surface
Driver in the canopy

Finishes

Canopy:

26 Black

74 White

87 Bronze

Body & Head:

26 Black

26 Black & 61 Satin Gold

87 Bronze



Drawing	Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
	Black	Black / Black	VOL_R70S3D_262626W	VOL_R70S3D_262626M
	White	Black / Black	VOL_R70S3D_742626W	VOL_R70S3D_742626M
	Black	Black / Satin Gold	VOL_R70S3D_262661W	VOL_R70S3D_262661M
	White	Black / Satin Gold	VOL_R70S3D_742661W	VOL_R70S3D_742661M
	White	Bronze / Bronze	VOL_R70S3D_748787W	VOL_R70S3D_748787M
	Bronze	Bronze / Bronze	VOL_R70S3D_878787W	VOL_R70S3D_878787M


Lens Ordering Codes:

One 20° embedded lens per head

Black	6 units of 123530263
Satin Gold	6 units of 123530613
Bronze	6 units of 123530873

Volta

suspension lamp



Configurator.estiluz.com
Customize your creation with our configurator, preview it in a virtual room and augmented reality.

8. Ordering Codes

Lamping R100S5D

LED 10x6,2W (Ang. 85° embedded nylon lens

>90 CRI / 350mA) 230V

2700K / Typ* 10x725 lumens

3000K / Typ* 10x763 lumens

*Integrated LED module (included)

*Alternative 60°exposed acrylic lens (included)

DIM: TRIAC (Optional: DALI, CASAMBI)

Optional optic: embedded aluminium optic 20°

Canopy: Multiple Round Surface

Driver in the canopy

Finishes

Canopy:

26 Black

74 White

87 Bronze

Body & Head:

26 Black

26 Black & 61 Satin Gold

87 Bronze



Drawing	Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
	Black	Black / Black	VOL_R100S5D_262626W	VOL_R100S5D_262626M
	White	Black / Black	VOL_R100S5D_742626W	VOL_R100S5D_742626M
	Black	Black / Satin Gold	VOL_R100S5D_262661W	VOL_R100S5D_262661M
	White	Black / Satin Gold	VOL_R100S5D_742661W	VOL_R100S5D_742661M
	White	Bronze / Bronze	VOL_R100S5D_748787W	VOL_R100S5D_748787M
	Bronze	Bronze / Bronze	VOL_R100S5D_878787W	VOL_R100S5D_878787M

Lens Ordering Codes:

One 20° embedded lens per head

Black	10 units of 123530263
Satin Gold	10 units of 123530613
Bronze	10 units of 123530873

Volta

suspension lamp

9. Certifications & Standards

Surface Canopy     

Recessed Canopy     

Warranty: 2 years

100% made in Spain

10. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LED's can be easily replaced .