




Description

- BENDZ compact wall light fitting for ambient lighting
- External 316L stainless steel gear unit cover
- Satin-finish diffuser
- End caps & fixing straps: Stainless steel 316L
- Housing: Co-extruded polycarbonate/PMMA for inside/outside use
- External metal parts in 316L stainless steel and screws in A4 stainless steel
- E27 socket fixed on the dismantlable end cap
- Moulded EPDM gaskets


Light specifications and controlling

- With 1 matt LED E27 filament lamp (8W 2700K)
- Net luminous flux: 490 lm

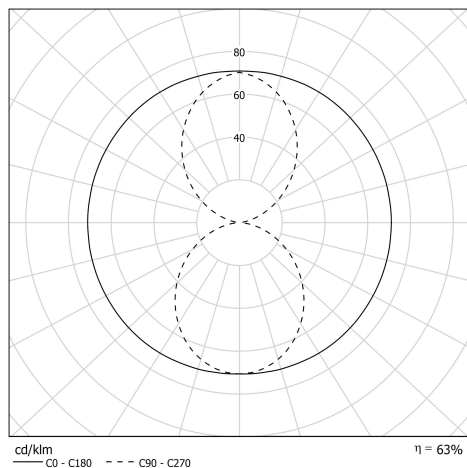

Installation and maintenance

- Length illuminating surface: 133 mm
- Total length: 270 mm
- Provided with 0,50m 3G1,5 cable with tinned copper meshwork under transparent tubing
- Connection to 3x2.5mm² automatic terminal block
- 2 reinforced fixing straps in stainless steel with HSHC screw in A2 stainless steel with variable centre distance and allowing 360° orientation
- Provided with stainless steel cable plate 316L, for indoor use (IP 40), for earthing
- Installation in vertical position, cable gland positioned downwards
- Maintenance by removal of the end cap

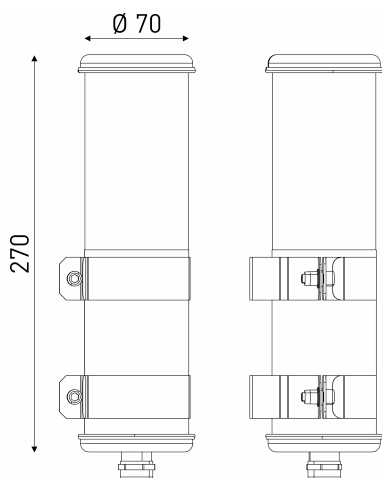

Characteristics

- Warranty : 5 years
- Operating temperature: -20°C to +30°C
- Protection: IP66/IP68/IP69K
- Resistance to IK shocks: IK10
- Class I
- Power consumption: 8 W
- T°C with incandescent wires: 650°C
- Weight: 0,8 kg
- Designed and made in France

