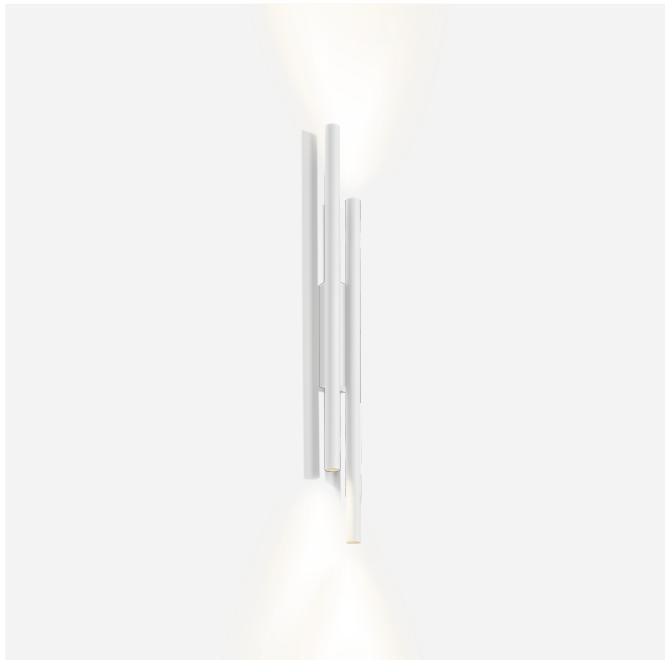
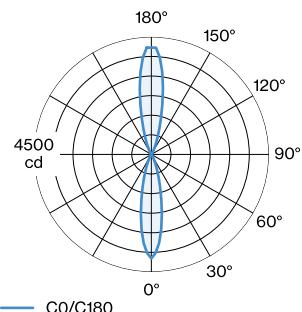



PROJECT
TYPE
NOTES
QUANTITY
DATE

CRI
 ≥ 90

Tubular wall surface luminaire made from aluminium; surface White Matt; powder coated, matt texture; RAL 9010; up and down light emission; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; beam angle 23°; 220 - 240 V; degree of protection IP20; Class 1; UGR ≤ 10 ; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

GENERAL

Wall
 Surface
 White Matt
 RAL 9010 ^a
 IP20
 Interior
 indirect 880 lm
 direct 880 lm
 total 1760 lm
 CIE flux code: 99 100 100 48
 100

LIGHT DISTRIBUTION

LED

3000 K
 CRI ≥ 90
 L80 / 50000h
 initial MacAdam ≤ 2 SDCM

OPTICAL

Standard
 beam angle 23°


ELECTRICAL

phase-cut dim
 220 - 240 V
 system 22.8 W
 Class 1

PHYSICAL

diameter 69 mm
 height 720 mm
 0.76 kg

^a Colour may deviate slightly due to production conditions.




Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.96	0.92	0.88	0.84	0.81
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMFa	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMFa	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.