


ASSEMBLY INSTRUCTIONS



Luminaires not suitable for covering with thermally insulating material

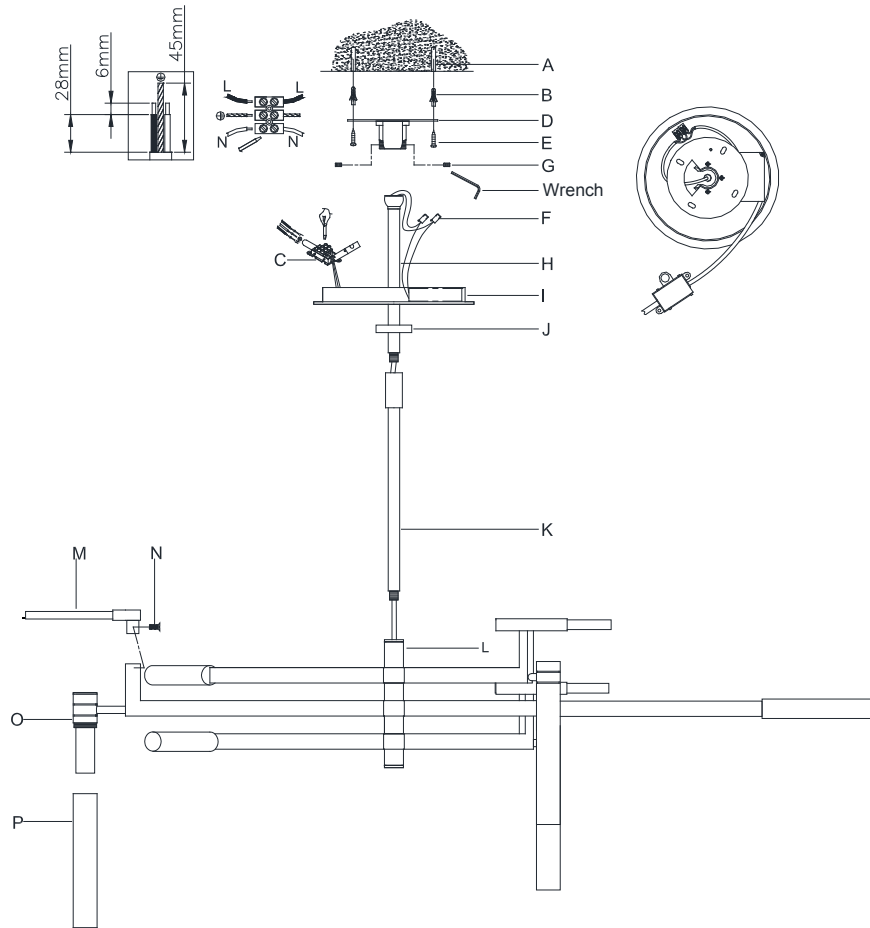

For indoor use only

220 Volt Melange Large Floating Disc Chandelier

Item # KW 5602-EU

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.


NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

1. Carefully remove all parts from the box.
2. Feed the fixture wire pass through the rod (K), then thread the rod (K) to the top of fixture body (L).
3. Feed the fixture wire pass through the collar ring (J) and canopy (I) and rod (H). Then thread the rod (H) to the rod (K).
4. Drill 4 holes (A) on the ceiling and make sure the hole distance will match to the mounting plate (D) holes.
5. Knock the anchors (B) into the ceiling holes.
6. Affix mounting plate (D) onto the ceiling and secure with mounting screws (E).
7. Hang the rod (H) with top end ball provided on the mounting plate (D) and secure with set screws (G) by using the wrench.
8. Connect the fixture neutral wire (black) with the driver neutral wire (black) using the small wire nut (F).
9. Connect the fixture hot wire (red) with the driver hot wire (red) using the small wire nut (F).
10. Loosen the screws on the wiring box (C) to fit the wire from your house and the fixture.
11. Attach the ground wire from the fixture (green or bare copper) to ground wire from the ceiling box.

IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.

VISUAL COMFORT & Co. Est. 1987

ASSEMBLY INSTRUCTIONS

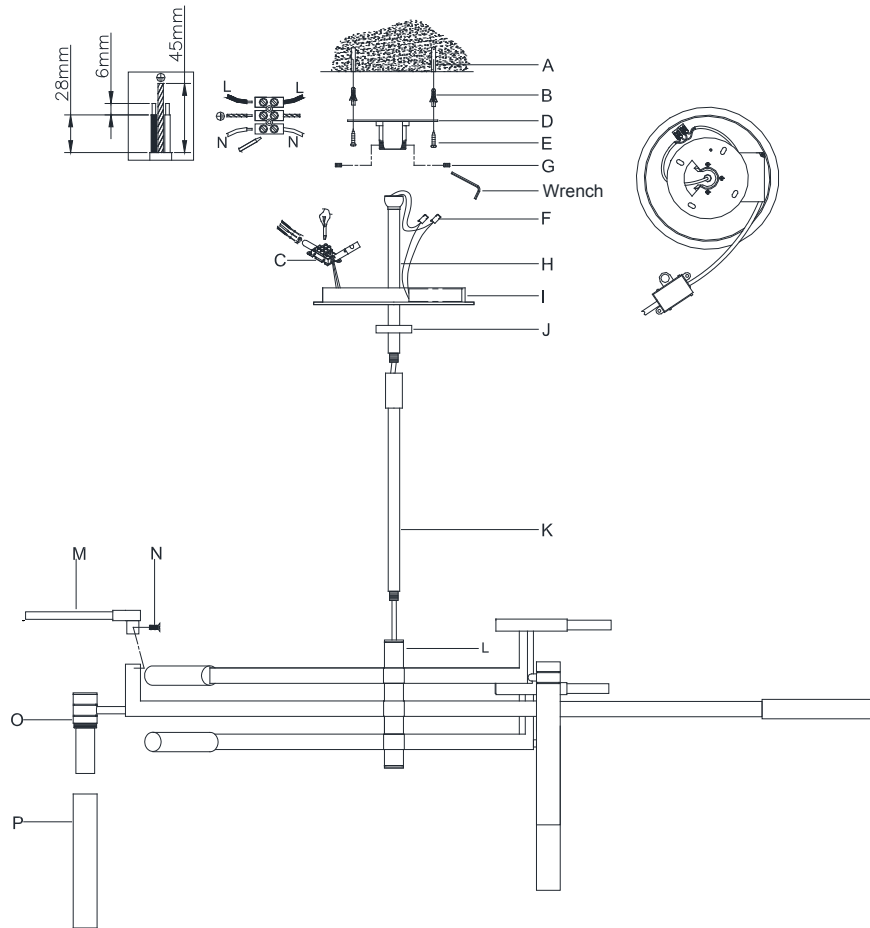

Luminaires not suitable for covering with thermally insulating material



220 Volt Melange Large Floating Disc Chandelier

Item # KW 5602-EU

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

12. Connect the Neutral wire from the fixture to the neutral wire from the wiring box.
13. Repeat this procedure for the Hot wire from the fixture to the hot wire from the ceiling box.
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
14. Put canopy (I) flush to the mounting plate (D) and secure with collar ring (J).
15. Attach the alabaster disk (M) to the top of the fixture body (L) and secure with screws (N).
16. Thread the tube (P) to the metal part (O).
17. Installation is complete, turn on power at fuse or circuit breaker.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

***The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

VISUAL COMFORT & Co. Est. 1987