



PANTHELLA 250 TABLE LAMP

Panthella 250 Table Lamp - 5744162513

The fixture emits a glare-free, soft and comfortable illumination. The metal shade versions direct the light directly downwards and create a pleasant illumination due to the inner white painted shade and the reflection from the trumpet-shaped stem. The opal acrylic produces a diffused comfortable light due to the translucent shade, the downward reflection from the inner shade and the reflection from the trumpet-shaped stem.

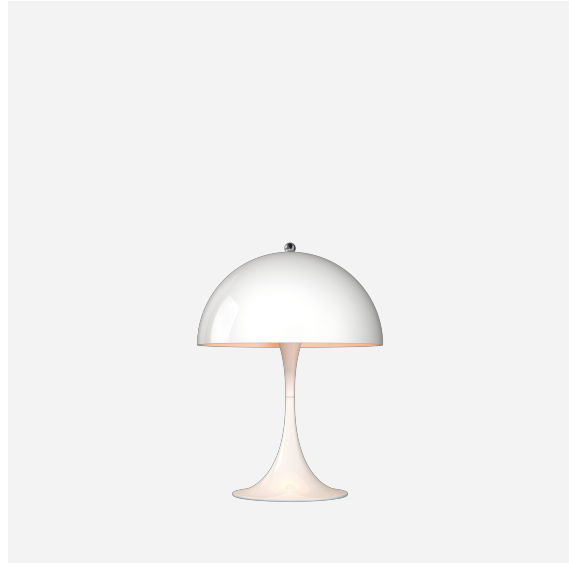

Verner Panton

Verner Panton (1926-1998) is famous for his inspirational and colorful personality. A unique person with a special sense for color, shape, light function and space. Over the course of his career, Panton introduced a series of modern lamps with personalities unlike any of his Scandinavian contemporaries.



**Set location -
The Qvest**



Product info

Information

White cord on white opal, white metal, brass metallised and Pale Rose versions. Black cord on all other versions. LED driver fitted externally on cord. Turn on/off the light with light fading in/out. Stepless dim of the light to a suitable level between 15 and 100%. Timer function to automatically turn off the light after an amount of time, selectable between off/4 hours/8 hours. Function to set a fixed light level each time the lamp is connected to main power. This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician.

Mounting

Plastic cord. Cable length: 2.5m. LED-driver: Separate, plugs into power outlet. Light control: In-line switch. Timer function: 4 hours/8 hours. Stepless dimming between 15 and 100%.

Finish

White opal acrylic shade with white stand. Grey opal acrylic shade with high lustre chrome stand. High lustre chrome shade and stand. Brass metallised shade and stand. Pale Rose, Pale Blue, Coral, White, Black or Orange, powder coated, shade and stand.

Materials

Shade: Injection moulded acrylic or deep drawn steel. Base and Housing: Die cast aluminium. Diffuser: Injection moulded opal pmma.

Sizes and weights

Width x Height x Length (mm) | 250 x 335 x 250 Max 1.2 kg

Class

Ingress protection IP20. Electric shock protection II.

Light source

LED 2700K 10W


Lumen: 460

Max. diameter: 48 mm

Max. height: 83 mm

Information

White cord on white opal, white metal, brass metallised and Pale Rose versions. Black cord on all other versions. LED driver fitted externally on cord. Turn on/off the light with light fading in/out. Stepless dim of the light to a suitable level between 15 and 100%. Timer function to automatically turn off the light after an amount of time, selectable between off/4 hours/8 hours. Function to set a fixed light level each time the lamp is connected to main power. This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician.

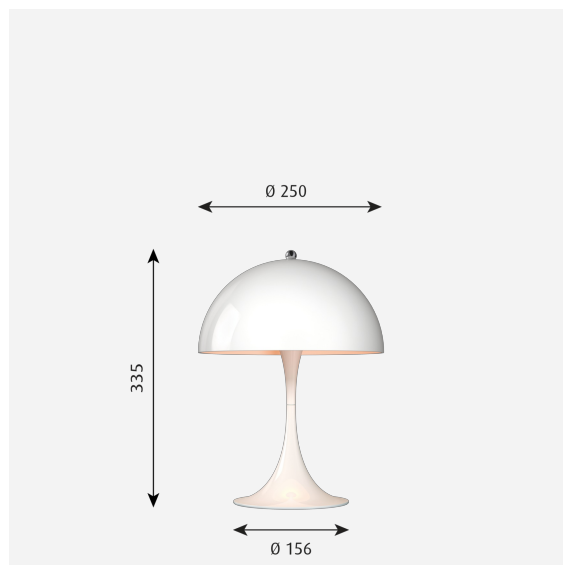


Related products




Panthella 400 Table Lamp




Panthella Floor




Panthella 320 Table Lamp



Panthella 160 Portable




Panthella 160 Portable Metal




Panthella 250 Portable

Light distribution diagrams


Cartesian

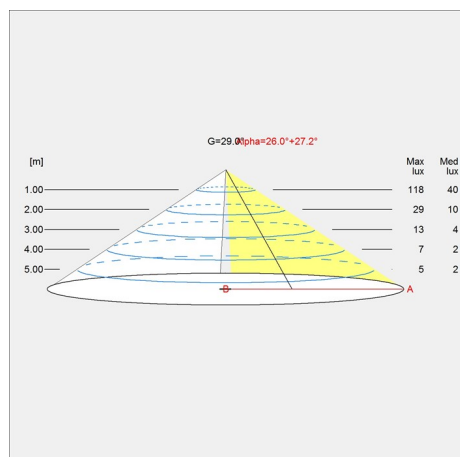

Isolux

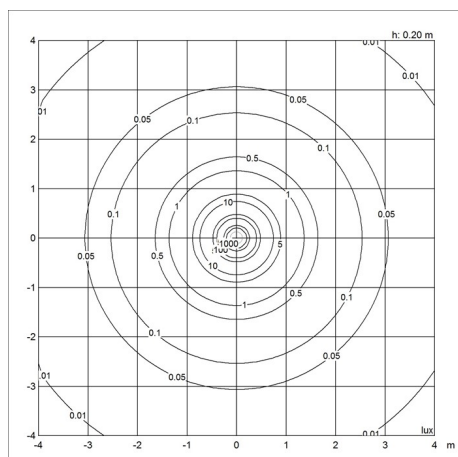

Polar

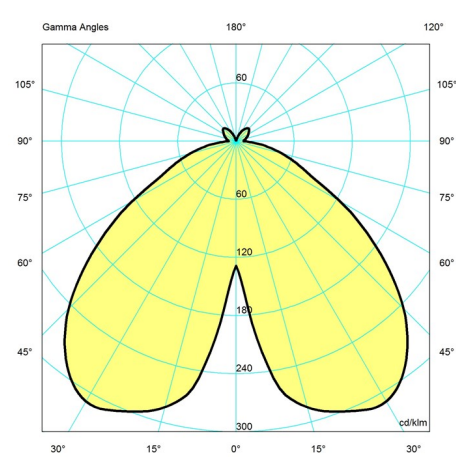

Spare parts & accessories

Product	Variant number
Adaptor 12V black	5744164867
Adaptor 12V white	5744164870
Panthella 250 Chrome top nut	5744166234
Panthella 250 Yellow/Green shade	5744166247
Panthella 250 White shade	5744166250
Panthella 250 Black shade	5744166263
Panthella 250 Blue/Green shade	5744166276
Panthella 250 Pink shade	5744166289
Panthella 250 Blue shade	5744166292
Panthella 250 Red shade	5744166302
Panthella 250 Yellow shade	5744166315
Panthella 250 Orange shade	5744166328
Panthella 250 Violet shade	5744166331
Panthella 250 Opal shade	5744166344
Panthella 250 Chrome shade	5744162568
Panthella 250 diffuser	5744161828
Panthella 250 Brass shade	5744167589
Panthella 250 Brass PVD top nut	5744167660
Panthella 250 Opal Grey shade	5744168054
Panthella 250 Pale Blue shade	5744612704
Panthella 250 Coral shade	5744612717
Panthella 250 Pale Rose shade	5744902087
Panthella 250 white cord	5744168436
Panthella 250 black cord	5744168533

Data specifications

Colour	White
Width	250
Built-in Height	-
Class	II
Standby (W)	-
Inrush Current	-
Kelvin	2700
SDCM	3
Watt	10
Light control	-
UGR Transversal / Axial	14.2/14.2
Driver life	>50.000

Length	250
Height	335
IP class	20
Net Weight	1.2
Power Factor (P = 100 % / P = 50 %)	0.52/0.45
Light source	LED 2700K 10W
CRI	90
Lumen	460
Efficacy	46
Min. Dim Level (%)	33
L80B50 (hours)	>100.000