



CorePro GLASS LED candles and lusters

CorePro LEDCandle ND6.5-60W B35E14827CLG

Featuring a classic heritage design, these filament LED candle combines the familiar shapes of classic incandescent bulbs with the benefits of long-lasting LED technology. The LED candle bulb, a very easy choice for people who are looking for a retrofit LED replacement, the LED candle provides 90% energy savings compared with conventional lamps. CorePro Glass LED bulbs provide excellent quality of light for stairway lighting. The LED candle bulb offers a lifetime of 15,000 hours to reduce maintenance costs.

Product data

General Information		Stroboscopic effect value (SVM)	
Lighting Technology	LED	Stroboscopic effect value (SVM)	0.9
Flux measurement reference	Sphere	Operating and Electrical	
Switching Cycle	20,000	Line Frequency	50 to 60 Hz
Nominal lifetime	15,000 hour(s)	Input Frequency	50 to 60 Hz
Cap-Base	E14 [E14]	Power Consumption	6.5 W
Light Technical		Lamp Current (Nom)	50 mA
Color Code	827 [CCT of 2700K]	Wattage Equivalent	60 W
Luminous Flux	806 lumen	Starting Time (Nom)	0.5 s
Color Designation	Warm White (WW)	Warm-up time to 60% light	0.5 s
Correlated Color Temperature (Nom)	2700 K	Power Factor (Fraction)	0.55
Luminous Efficacy (rated) (Nom)	124.00 lm/W	Voltage (Nom)	220-240 V
Color Consistency	<6	Temperature	
Color rendering index (CRI)	80	T-Case Maximum (Nom)	55 °C
LLMF At End Of Nominal Lifetime (Nom)	70 %		
Flickering value (PstLM)	1		

CorePro GLASS LED candles and lusters

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Clear
Bulb Shape	B35 [B 35mm]


Approval and Application

Energy Efficiency Class	E
Energy Consumption kWh/1000 h	7 kWh
EPREL Registration Number	387441
CE mark	Yes
EU RoHS compliant	Yes

Product Data


Full product code	871951434746500
Order product name	CorePro LEDCandle ND6.5-60W B35E14827CLG
Order code	929002028092
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material number (12NC)	929002028092
Full product name	CorePro LEDCandle ND6.5-60W B35E14827CLG
EAN/UPC - Case	8719514347472

Dimensional drawing




Product	D	C
CorePro LEDCandle ND6.5-60W B35E14827CLG	35 mm	97 mm

Photometric data




Light Distribution Diagram - CorePro LEDCandle ND6.5-60W B35E14827CLG

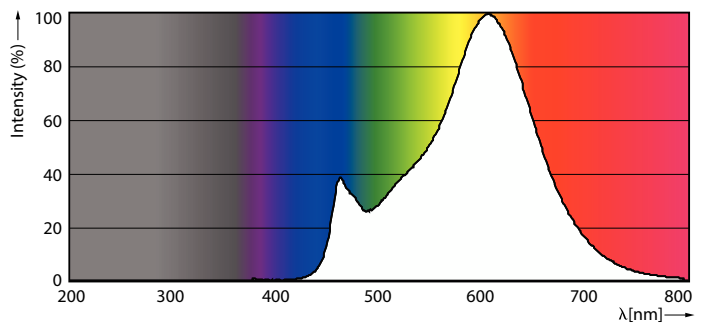

Spectral Power Distribution Colour - CorePro LEDCandle ND6.5-60W B35E14827CLG

CorePro GLASS LED candles and lusters


Photometric data




© Philips Lighting B.V. 2023. Philips Lighting B.V. is a registered trademark of Koninklijke Philips N.V.

General uniform lighting - CorePro LEDCandle ND6.5-60W B35E14827CLG

Lifetime

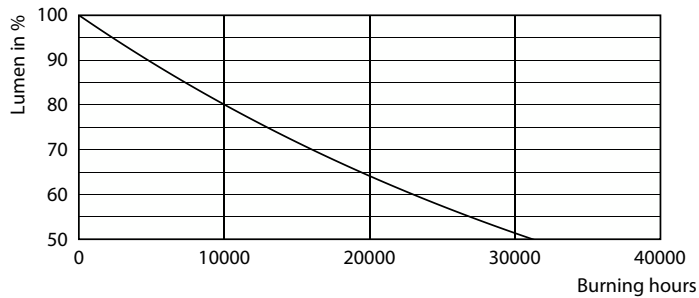

Lumen Maintenance Diagram - CorePro LEDCandle ND6.5-60W B35E14827CLG

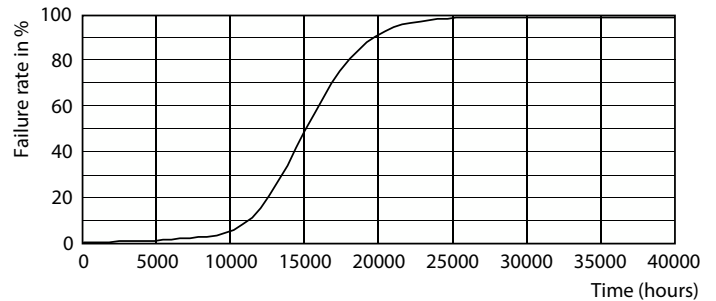

Life Expectancy Diagram - CorePro LEDCandle ND6.5-60W B35E14827CLG

