



Gong Microprisma Ø600

Francesc Vilaró

Surface-mounted ceiling light Gong Microprisma Ø600 LED 34.7W 4000K PHASE CUT Marron RAL 8016 matt
Teixit VERMELL 2088lm

Technical features

Luminaire total power: 34.7W
Real lumens: 2088
Real lm/W: 60
Correlated Colour Temperature (CCT): 4000K
UGR: <=22
Structure material: Steel
Structure finish: Marron RAL 8016 matt, Teixit VERMELL
Diffuser material: Methacrylate
Diffuser finish: MICROPRISMA, Matt
Driver Brand: HEP
Voltage / frequency: 220-240V/50-60Hz
Dimming protocol: PHASE CUT
Power Factor: 0.97
Useful life: 50,000h L80B20
Warranty: 5 years



Luminotechnic features

CRI: 92
MacAdam steps: 5
Photobiological risk: RG1

UGR		Lampholder	Quantity	Light source power (W)
S=0.250				
Ceiling / cavity	0.7	LED	1	31.2W
Walls	0.5			
Working Plane	0.2			
Room dimensions	X=4H, Y=8H			
UGR crosswise	19.4			
UGR lengthwise	19.4			


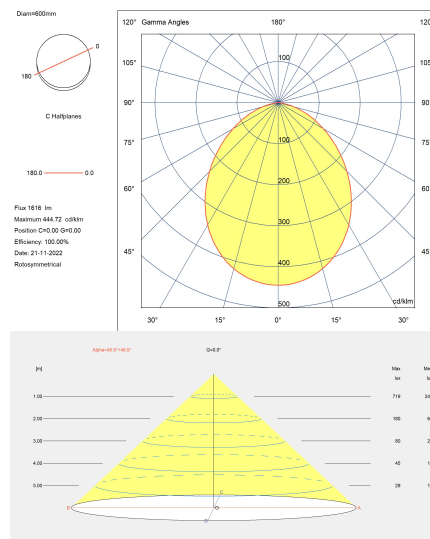


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

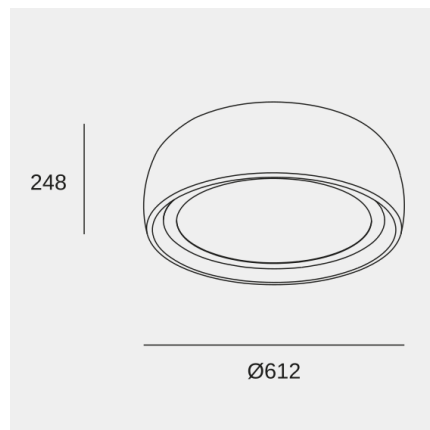

Gong Microprisma Ø600

Francesc Vilaró

Surface-mounted ceiling light Gong Microprisma Ø600 LED 34.7W 4000K PHASE CUT Marron RAL 8016 matt
Teixit VERMELL 2088lm

Logistics



x 1

Net weight (kg): 6.14

Packaged weight (kg): 10.05

Packaging: 645mm x 645mm x
345mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.