




PROJECT

TYPE


NOTES

QUANTITY

DATE

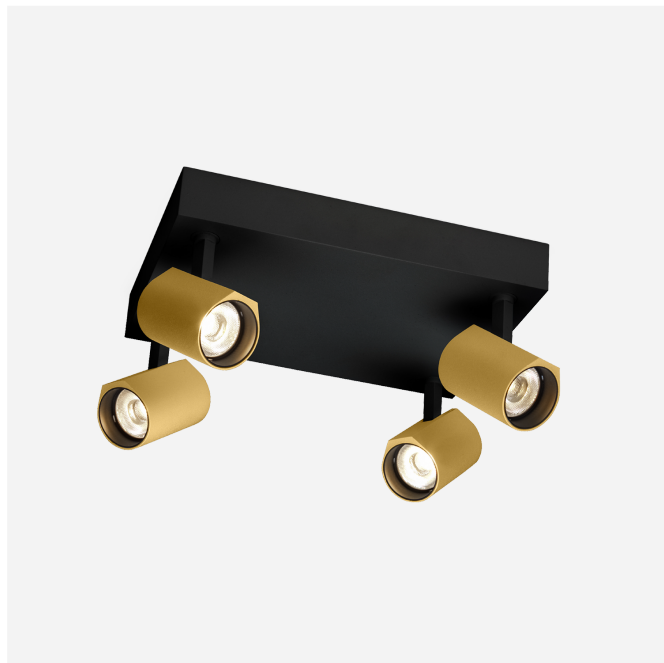

Ceiling surface luminaire with 4 spotlights; made from die-cast aluminium; with rectangular base; surface Black Matt + Gold; wet painted, matt smooth; RAL 9011; inner ring black; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; ≤ 2 SDCM (initial MacAdam); CRI ≥ 90 ; beam angle 31°; 220 - 240 V; 350° rotatable and 90° tiltable; degree of protection IP20; Class I; driver included; optional honeycomb louver available, to reduce glare; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;



LUMINAIRE

Ceiling
Surface
tilt max 90 °
rotation 350 °
Black Matt + Gold
RAL 9011 ^a
IP20
Interior
per head 530 lm
heads 4
2130 lm

LED Module

3000 K
CRI ≥ 90
L70 / 55000h
 ≤ 2 SDCM (initial MacAdam)
530 lm
72 lm/W ^b

Optical

Medium (standard)
beam angle 31°
CIE flux code: 99 100 100 100
100


Electrical

phase-cut dim
220 - 240 V
system 29.7 W
Class I
Standard

Physical

diameter 34 mm
height 55 mm
0.78 kg

LIGHT DISTRIBUTION



^a Colour may deviate slightly due to production conditions
^b Without electrical and optical losses



CONE DIAGRAM

medium (standard) 31°

h (m)	EO° (lx)	ø (m)
1	1530	0.56
2	380	1.12
3	170	1.68
4	100	2.23
5	60	2.79

OPTICAL ACCESSORIES

Honeycomb Louver

Type	Colour	Voltage	Ø (MM)	Item number
BLIEK petit CENO LECA PIRRO QITO 1.0	Black		29	915230B0