


Pik 160 Wall

LL1351161

Lombardo.




Technical information:

Installation:	Wall
Material:	Aluminium
Finish:	Grey Anodized Aluminium
Treatment:	Anodization
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	2200K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	9
Lumen:	1035
Real Lumen:	780
Power supply:	✓ integrated
LED:	AC DIRECT
Insulation class:	⊖ CL.I
Power cable:	0.20 m H05RN-F 3x1
Type of protection:	IP 65
Resistance to breakage:	IK 08 5J xx7
Standards and Marks of Conformity:	CE UK EA

Supplied with mounting base. Including quick gel connectors IP 68 for wiring.



All parts in direct contact with the soil must never be covered by the soil itself or come into contact with aggressive chemicals (e.g. fertilisers, herbicides, pool and/or floor cleaning products, etc.). Clean parts covered with soil build-up or cement dust periodically. Outdoor products must be installed with the appropriate plastic accessories. They must not be installed directly on the ground or directly on concrete because contact between the two materials can create accelerated oxidation of the device.




Pik 160 Wall

Lombardo.

LL1351161

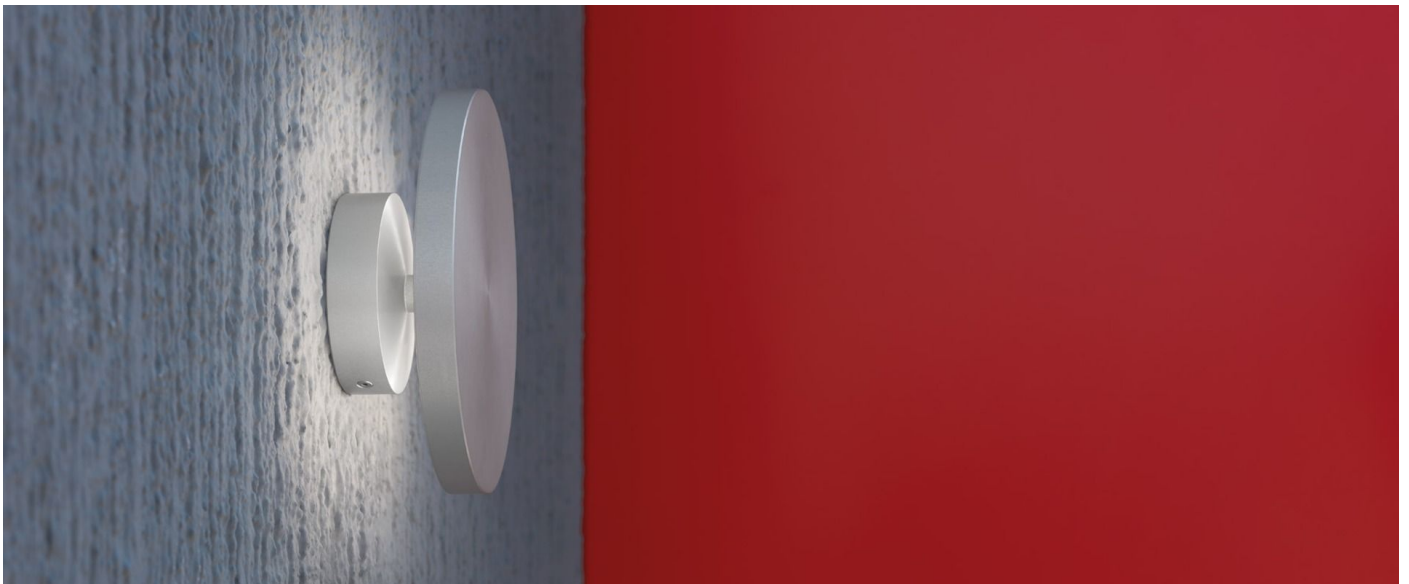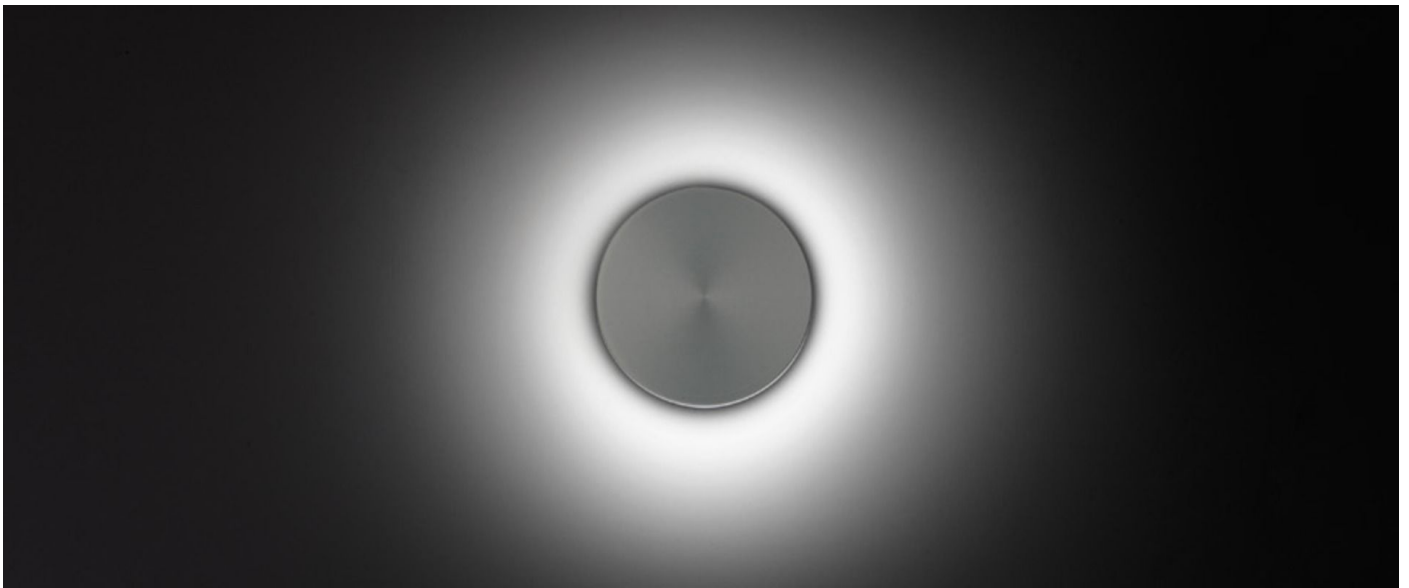

Installation images:

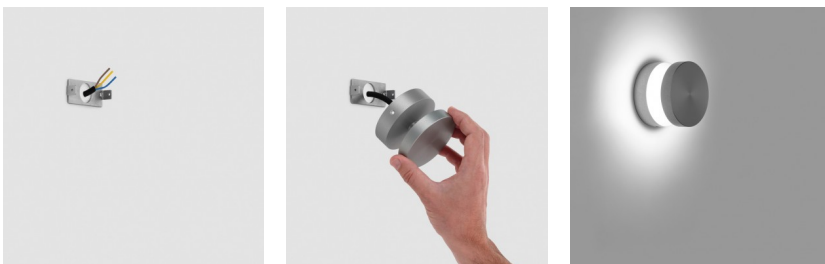


Pik 160 Wall

Lombardo.

LL1351161

Lighting simulation:

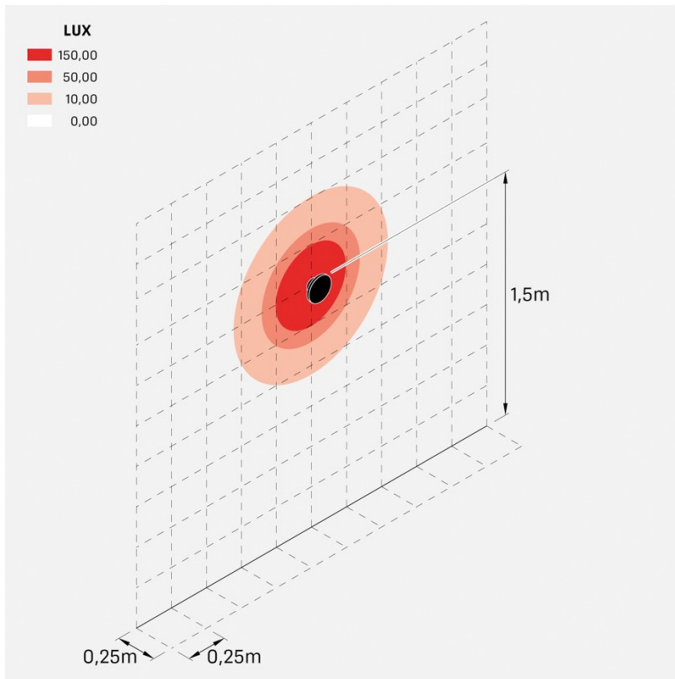

pik_160_wall

Photometric curves:

